Methods in Human Geography

Quantitative Methods: Spatial Analysis II



Justin van Dijk
j.t.vandijk@ucl.ac.uk

This week

Part I

- Mapping 101.

Part II

- More spatial analysis: a tour of what else is out there.
- Module summary.

Mapping 101


Mapping 101

- Use tables for precision.
- Use graphs to effectively summarise large volumes of information.
- Use maps to show spatially heterogeneous information.


Mapping 101

- Mapping is a process and a way of thinking which can conceal and reveal.
- It requires simplification and choices, so a map is never an ‘objective’ representation.
- Most common: choropleth map, which shades each spatial unit by its aggregate value.
- It is hard to make a good map, but relatively easy to make a bad one.

Mapping 101

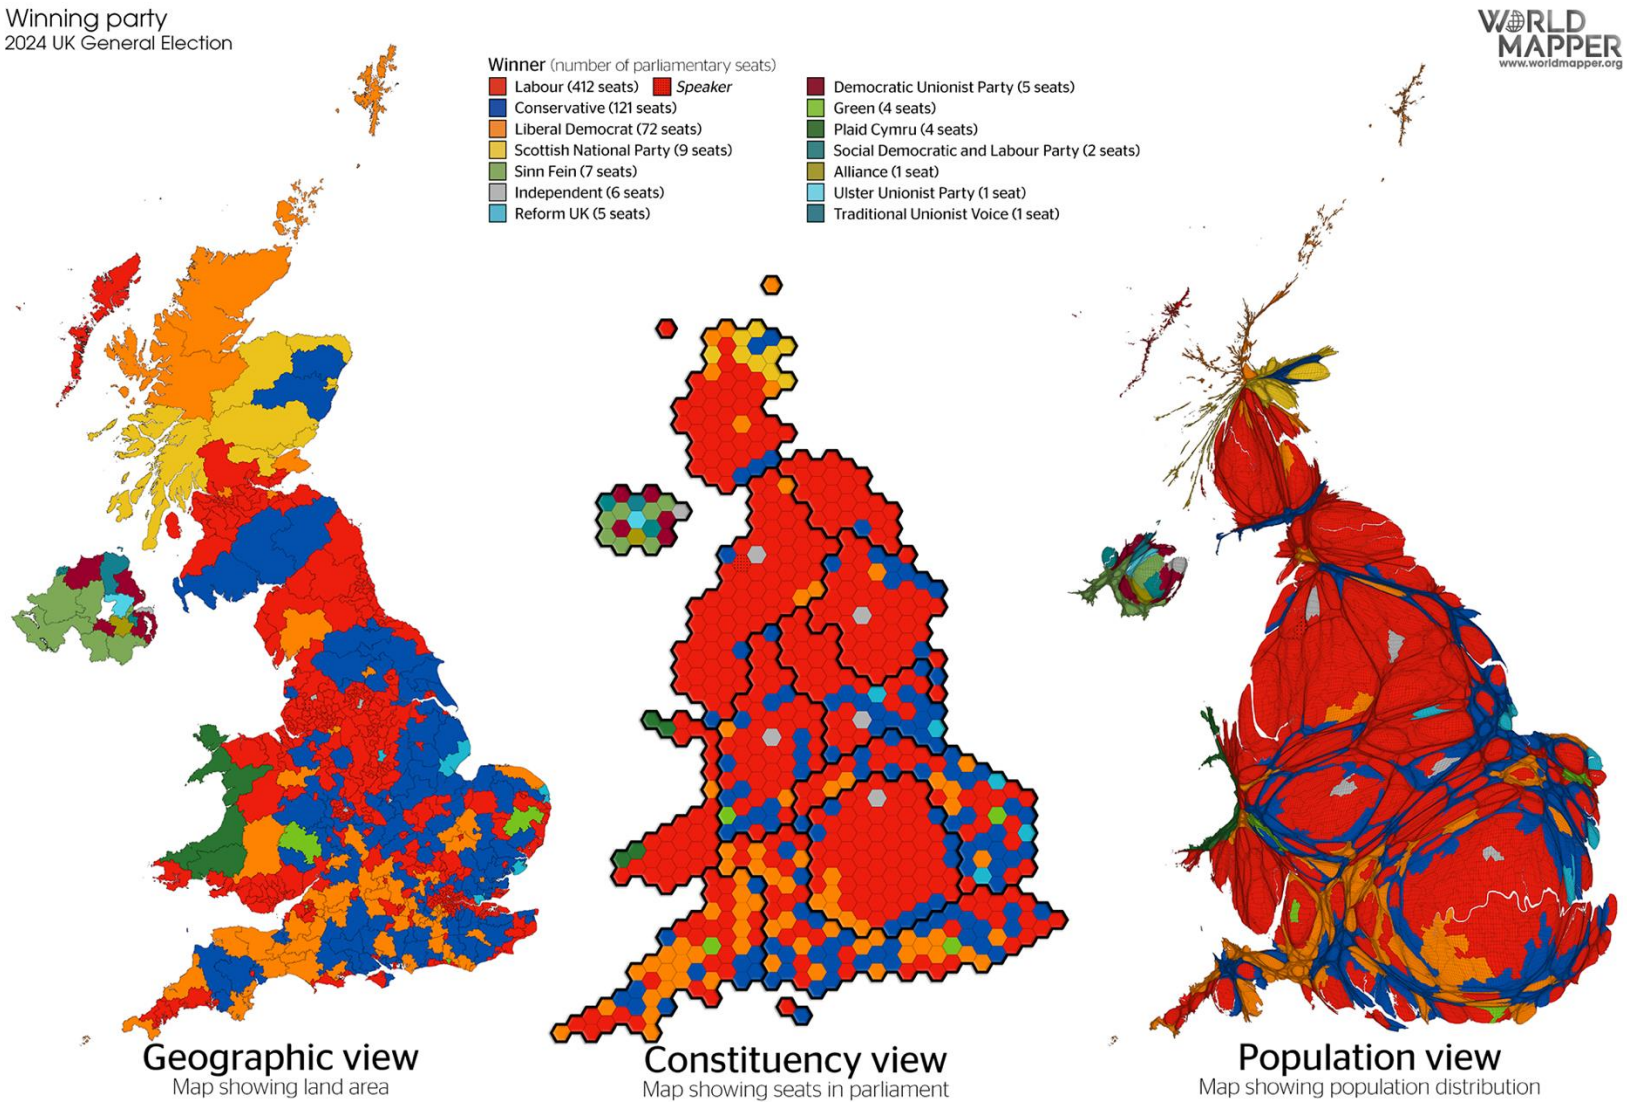

Winning party
2024 UK General Election
WORLD MAPPER
www.worldmapper.org
Winner (number of parliamentary seats)
Labour (412 seats)
Speaker
Conservative (121 seats)
Liberal Democrat (72 seats)
Scottish National Party (9 seats)
Sinn Fein (7 seats)
Independent (6 seats)
Reform UK (5 seats)
Democratic Unionist Party (5 seats)
Green (4 seats)
Plaid Cymru (4 seats)
Social Democratic and Labour Party (2 seats)
Alliance (1 seat)
Ulster Unionist Party (1 seat)
Traditional Unionist Voice (1 seat)
Geographic view
Map showing land area
Constituency view
Map showing seats in parliament
Population view
Map showing population distribution

Mapping 101

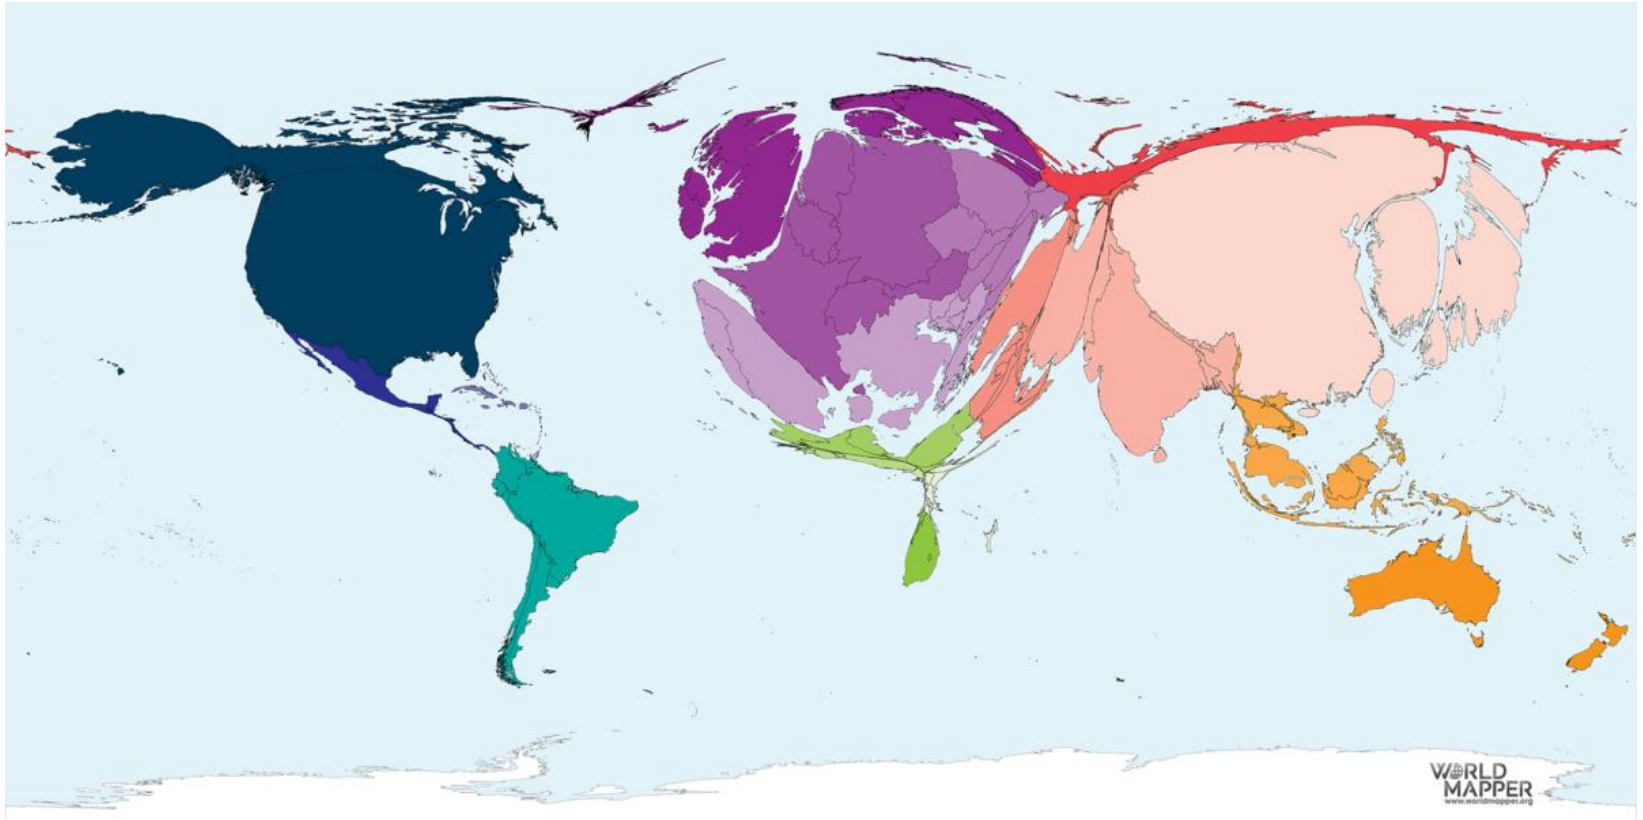

Scientific papers published in 2016.

Mapping 101

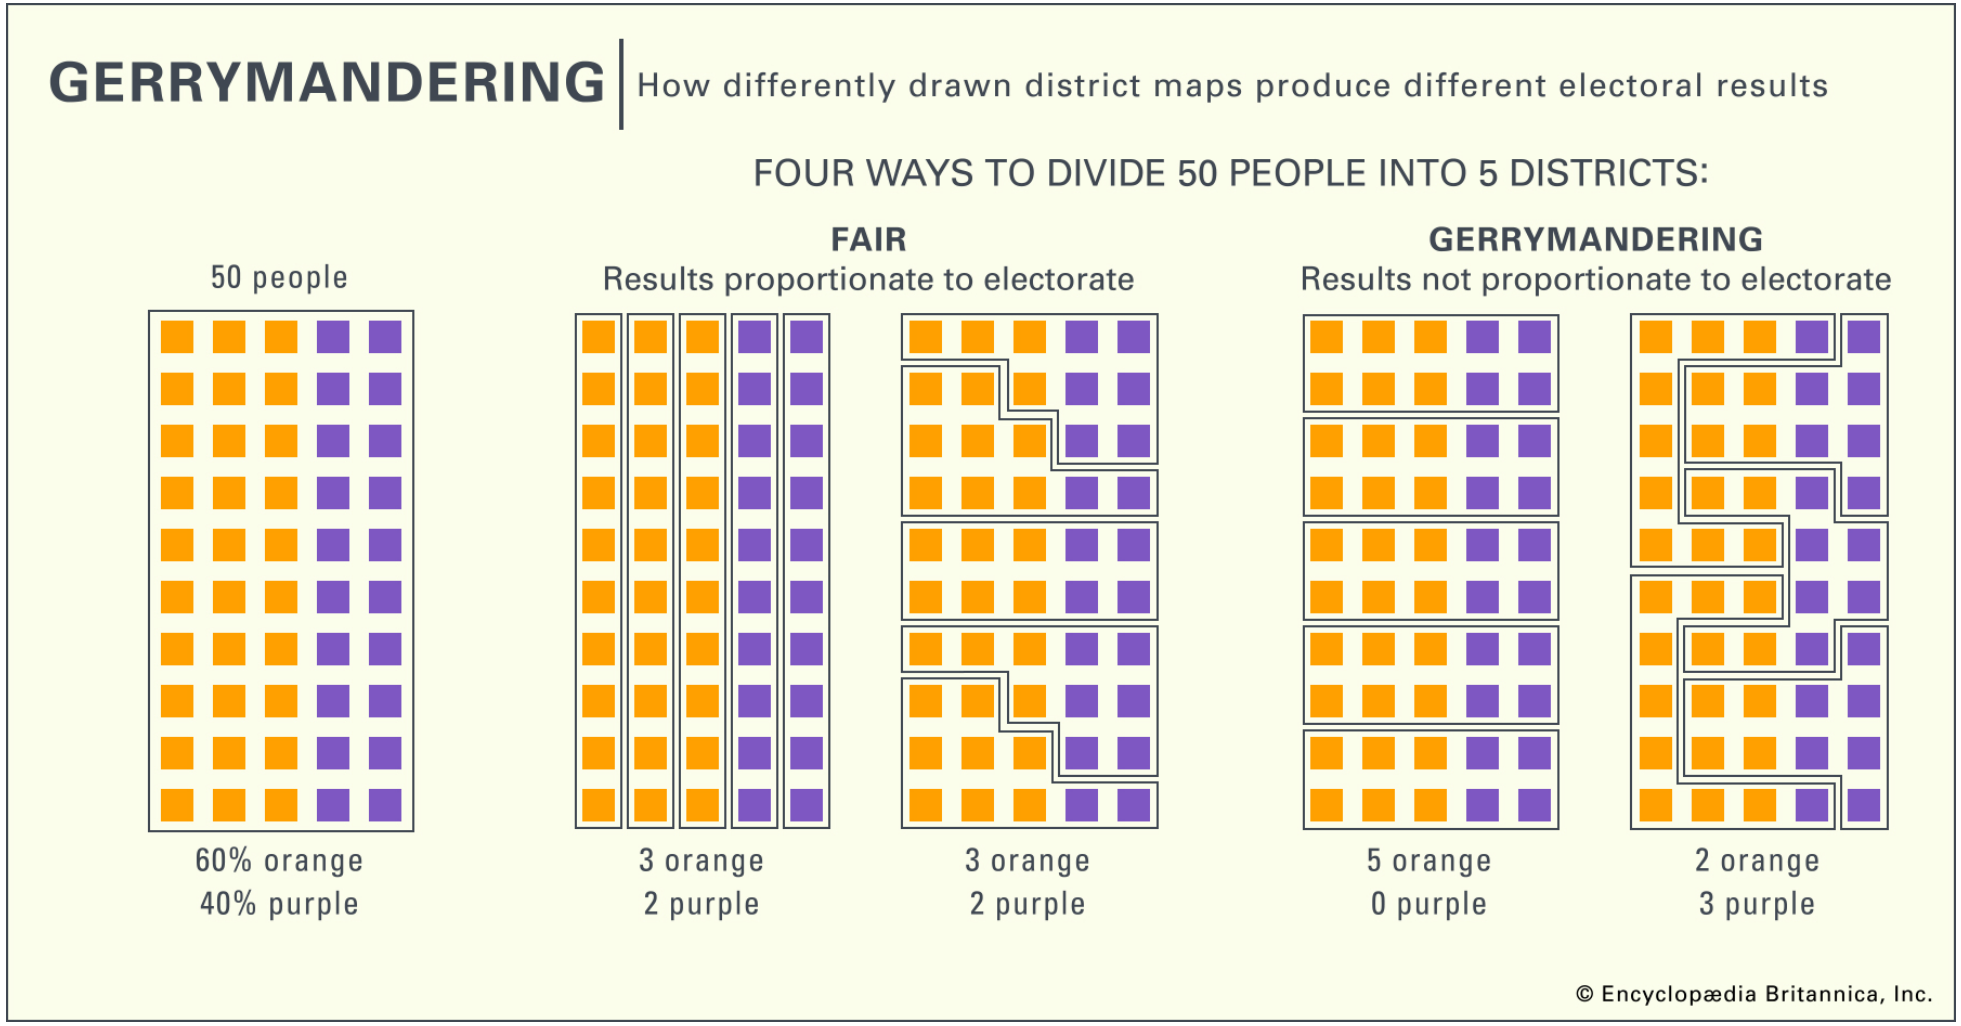


Encyclopaedia Britannica, Inc. Gerrymandering. [Online]
https://www.britannica.com/topic/gerrymandering

Mapping 101

Typical workflow:

- Importing spatial data into your GIS.
- Importing attribute data into your GIS – cleaning and wrangling might be required prior to importing (e.g. data preparation in R).
- Geoprocessing (e.g. point in polygon, but many more methods!).
- Creating and modifying maps and cartographic outputs.


Mapping 101

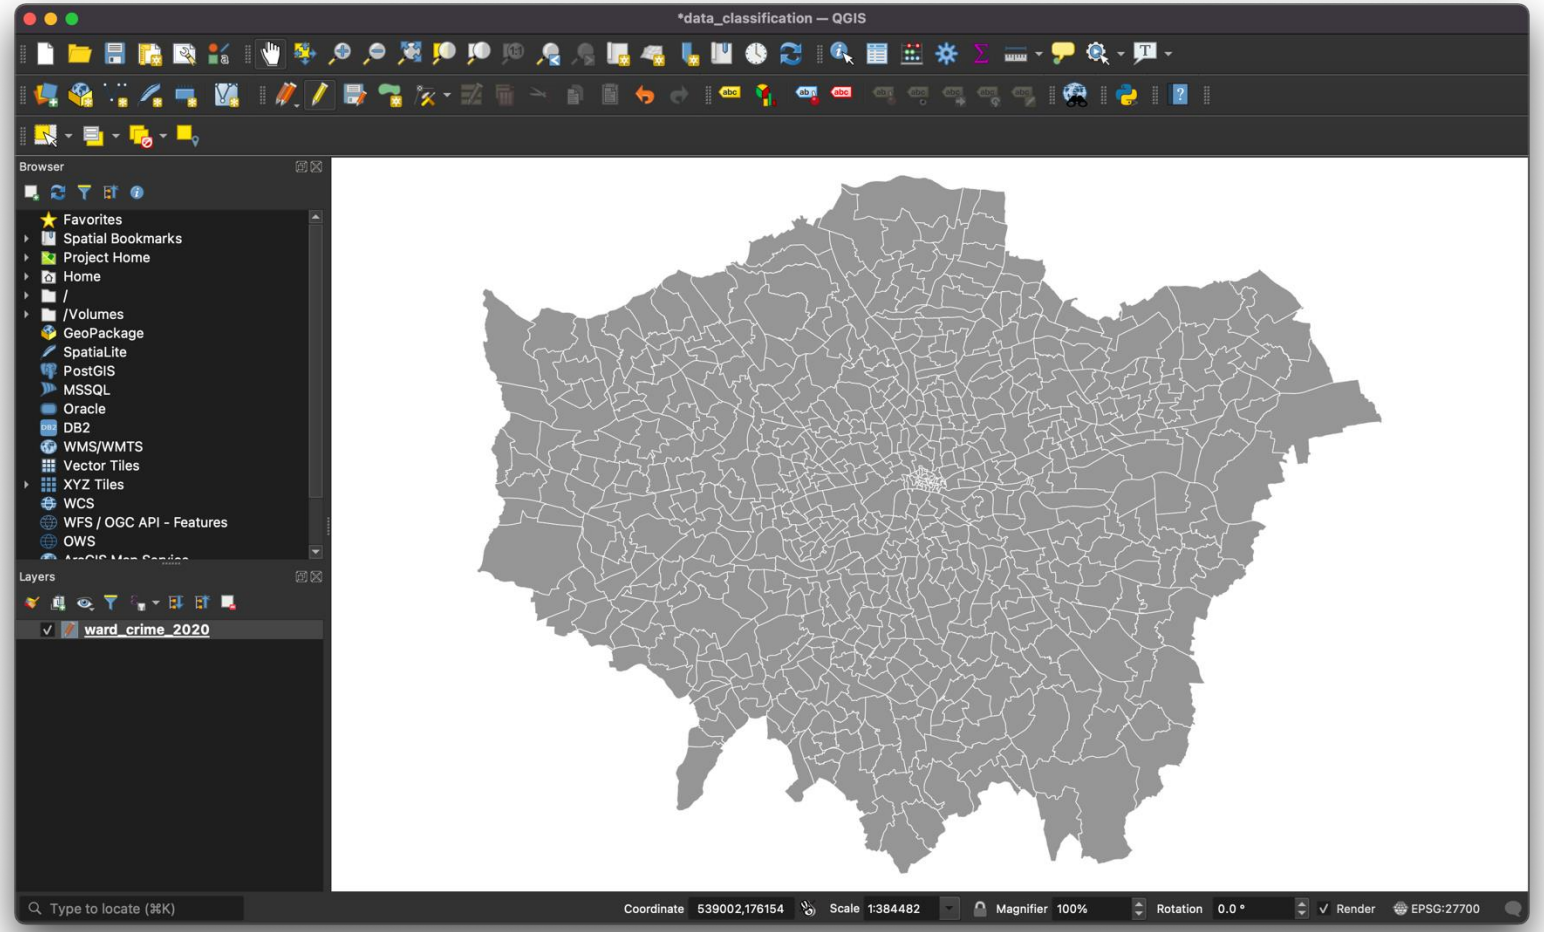
*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
Type to locate (⌘K)
Coordinate 539002,176154
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700


Mapping 101

Equal Interval: This method divides the range of data values into equal intervals based on numerical value. If the data distribution is skewed, this approach can give more weight to outliers, potentially leading to less balanced representation across the classes.

Mapping 101

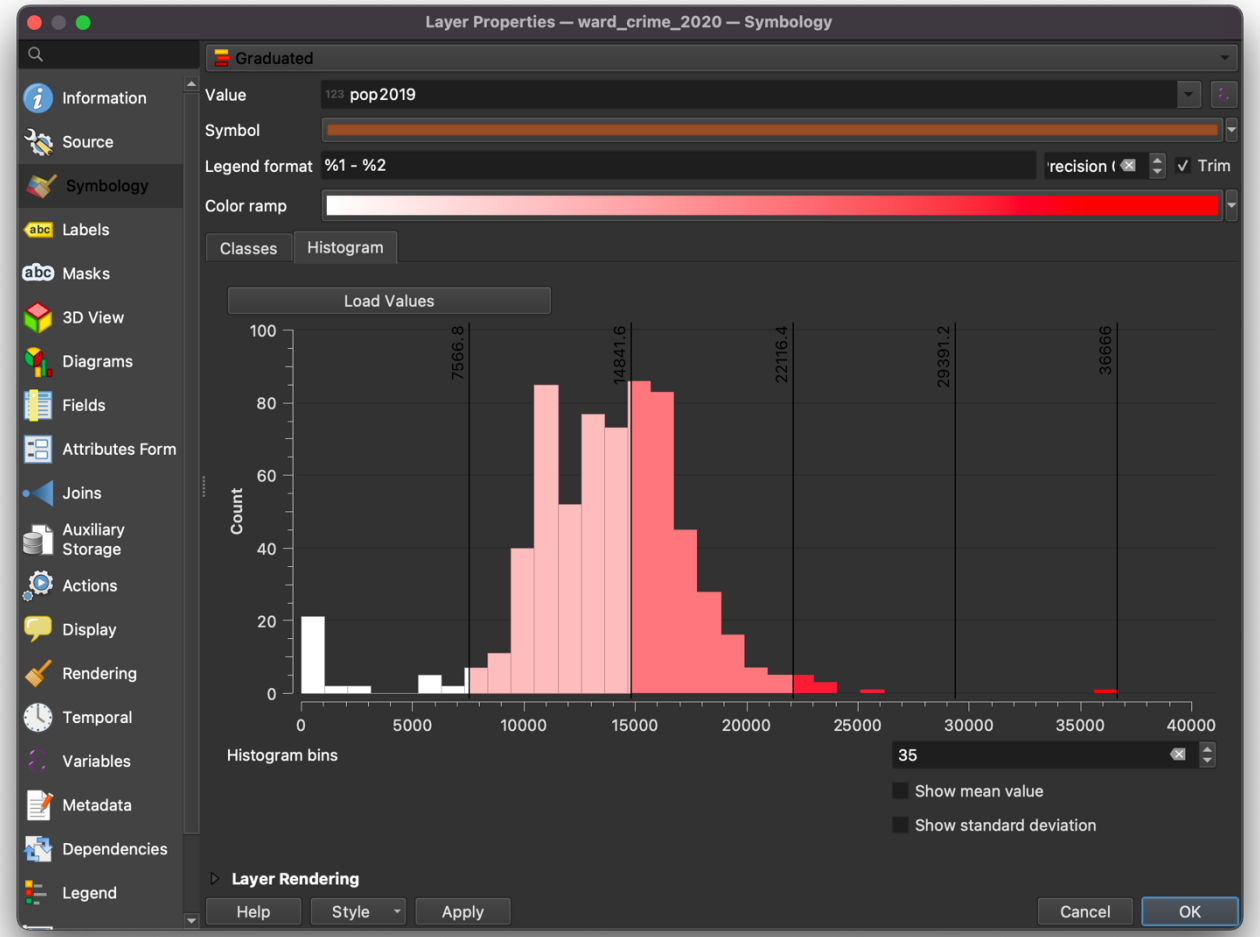
Layer Properties — ward_crime_2020 — Symbology
Information
Source
Symbology
Labels
Masks
3D View
Diagrams
Fields
Attributes Form
Joins
Auxiliary Storage
Actions
Display
Rendering
Temporal
Variables
Metadata
Dependencies
Legend
Graduated
Value
pop2019
Symbol
Legend format
%1 - %2
Trim
Color ramp
Classes
Histogram
Load Values
7566.8
14841.6
22116.4
29391.2
36666
Count
Histogram bins
35
Show mean value
Show standard deviation
Layer Rendering
Help
Style
Apply
Cancel
OK


Mapping 101

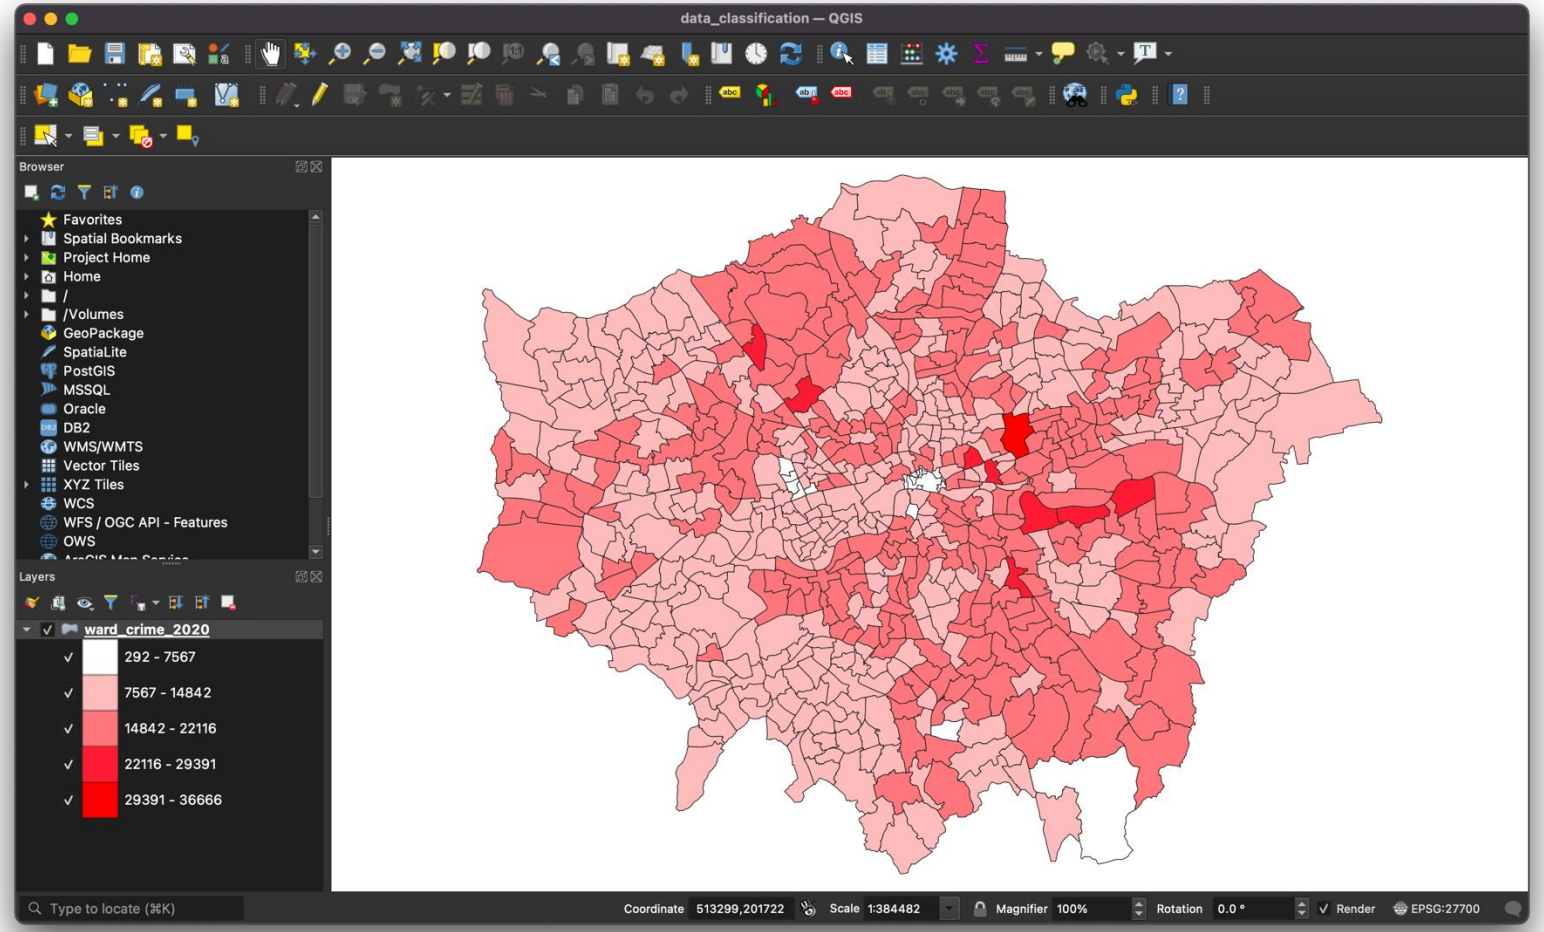
data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
292 - 7567
7567 - 14842
14842 - 22116
22116 - 29391
29391 - 36666
Type to locate (⌘K)
Coordinate 513299,201722
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700


Mapping 101

Natural Breaks/Jenks: This method aims to minimise the average deviation within each class from the class mean while maximising the deviation between the means of different classes. In the case of a skewed distribution, outliers often end up in their own class, although this can vary depending on the number of classes chosen.

Mapping 101

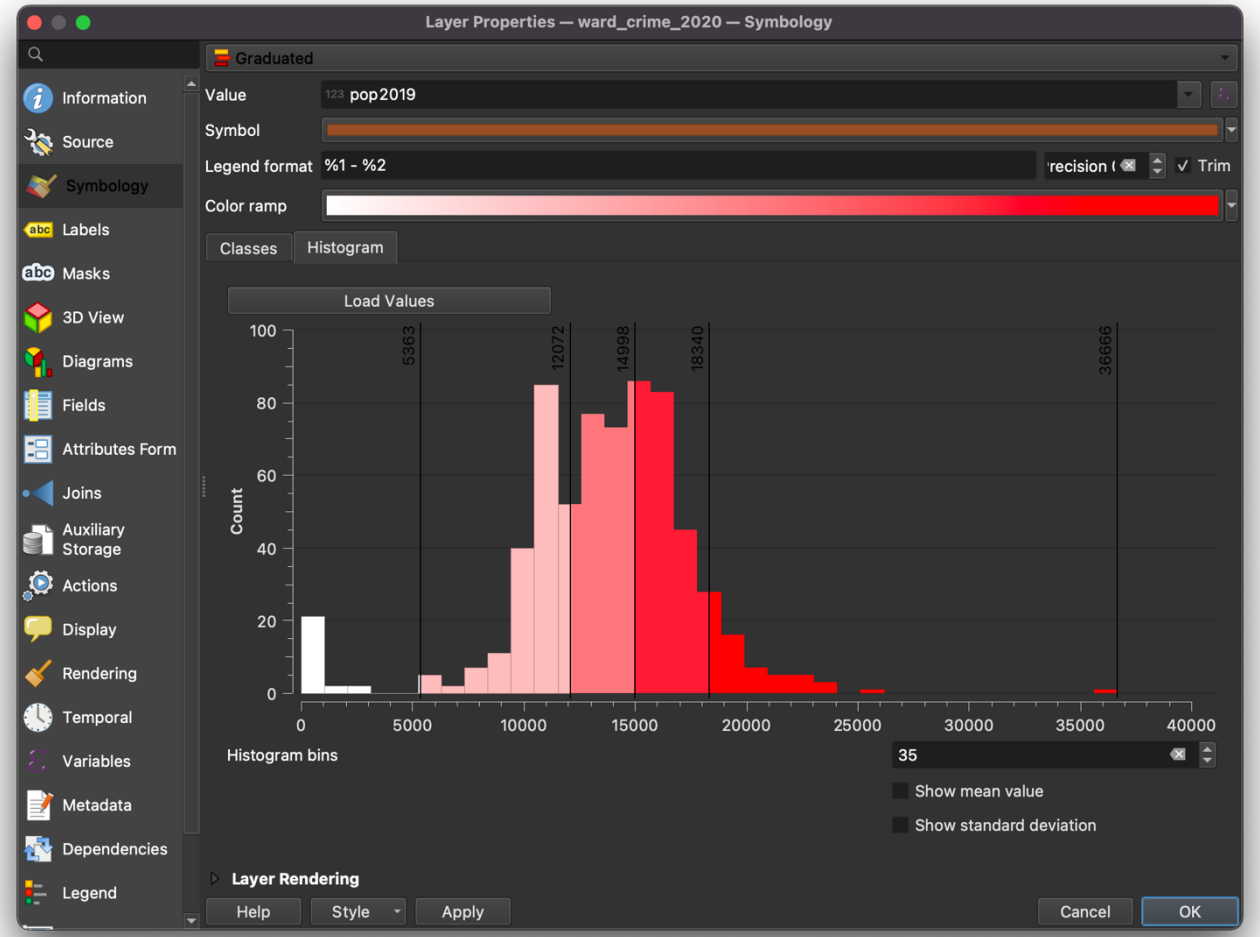
Layer Properties — ward_crime_2020 — Symbology
Graduated
Information
Source
Symbology
Labels
Masks
3D View
Diagrams
Fields
Attributes Form
Joins
Auxiliary Storage
Actions
Display
Rendering
Temporal
Variables
Metadata
Dependencies
Legend
Value
pop2019
Symbol
Legend format
%1 - %2
Trim
Color ramp
Classes
Histogram
Load Values
5363
12072
14998
18340
36666
Count
Histogram bins
35
Show mean value
Show standard deviation
Layer Rendering
Help
Style
Apply
Cancel
OK

Mapping 101

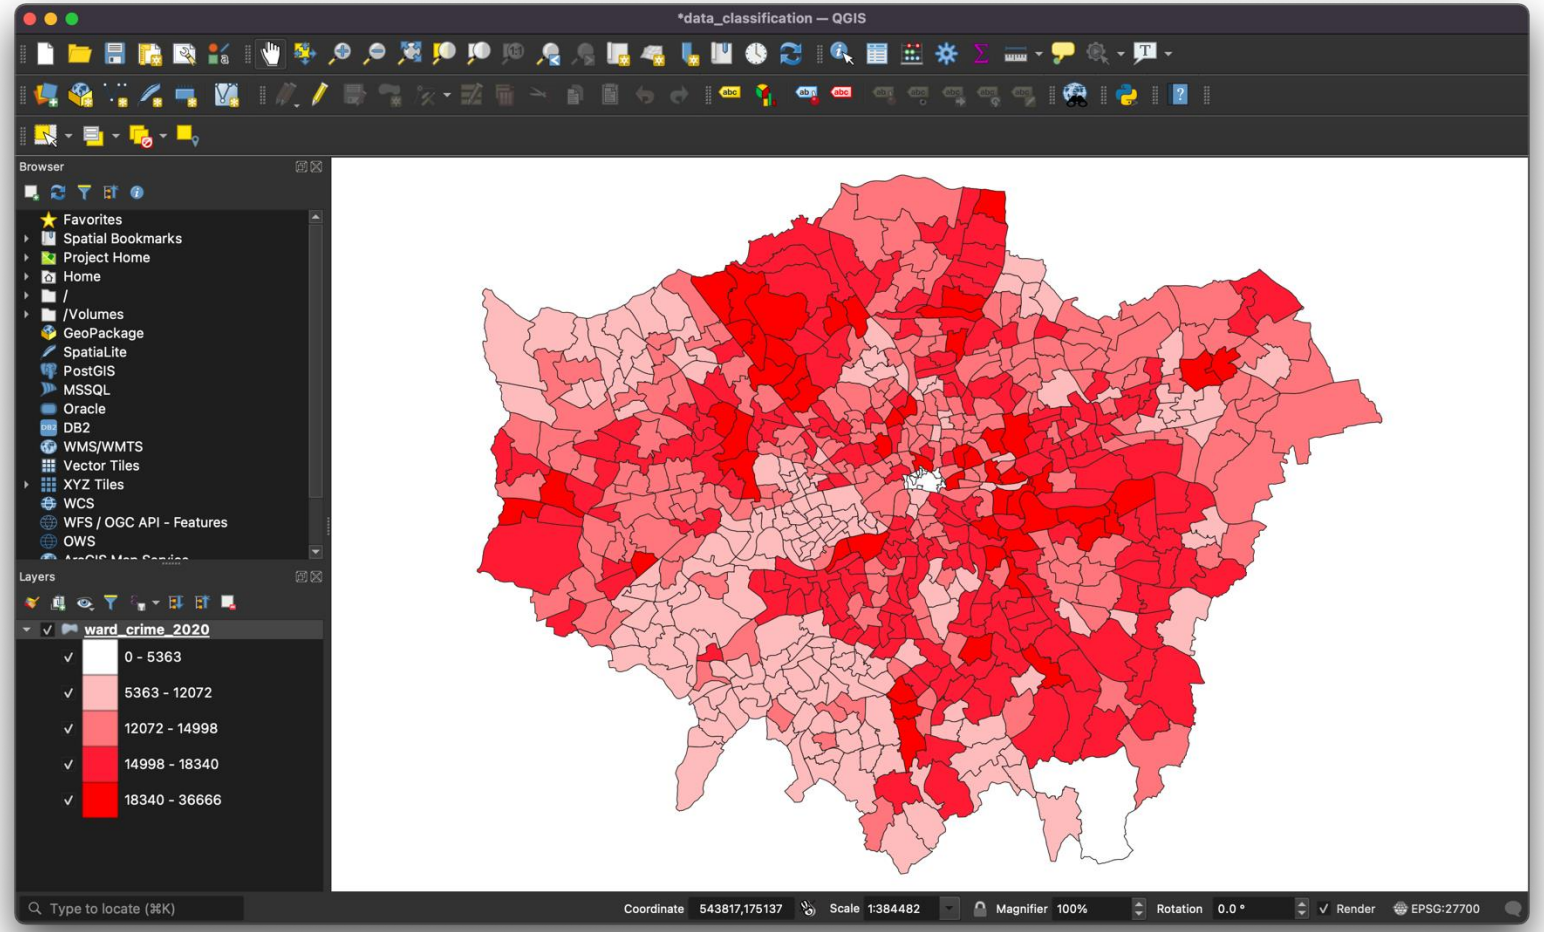
*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
0 - 5363
5363 - 12072
12072 - 14998
14998 - 18340
18340 - 36666
Type to locate (⌘K)
Coordinate 543817,175137
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700


Mapping 101

Quantiles: This method divides the distribution into classes so that each bin contains the same number of values. The splits are based on the rank order of the data rather than the actual values. When the distribution is skewed, this approach can result in very different values being grouped together in the same bin.

Mapping 101


Layer Properties — ward_crime_2020 — Symbology
Graduated
Information
Source
Symbology
Labels
Masks
3D View
Diagrams
Fields
Attributes Form
Joins
Auxiliary Storage
Actions
Display
Rendering
Temporal
Variables
Metadata
Dependencies
Legend
Value
pop2019
Symbol
Legend format
%1 - %2
Trim
Color ramp
Classes
Histogram
Load Values
Count
100
80
60
40
20
0
10989.6
13127.6
14881.2
16437.8
36666
0
5000
10000
15000
20000
25000
30000
35000
40000
Histogram bins
35
Show mean value
Show standard deviation
Layer Rendering
Help
Style
Apply
Cancel
OK


Mapping 101

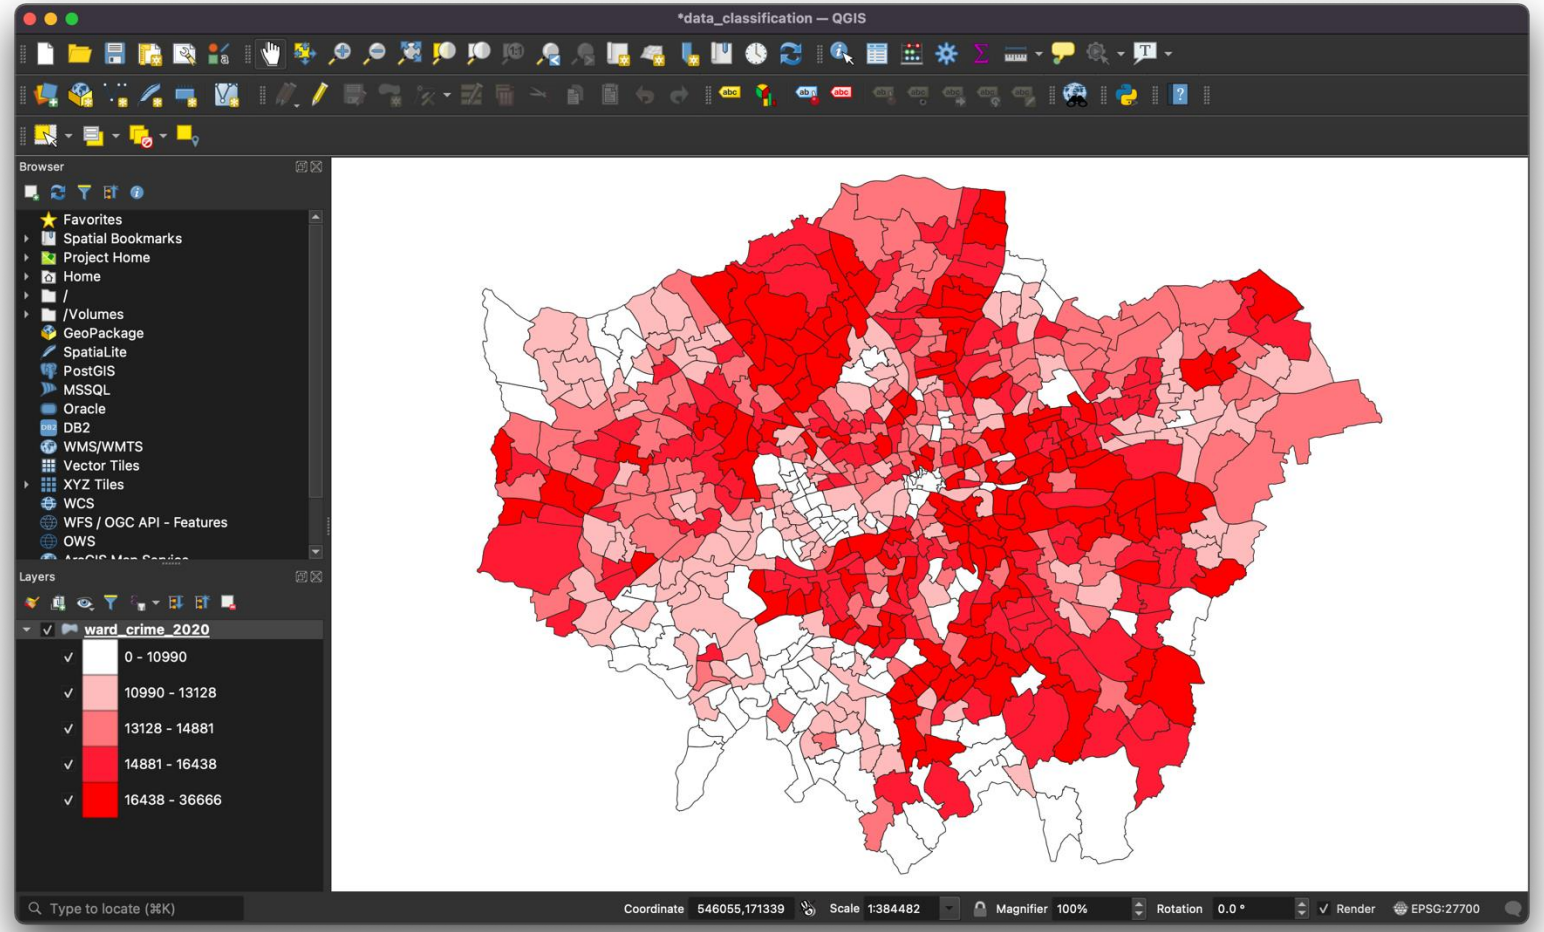
*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
0 - 10990
10990 - 13128
13128 - 14881
14881 - 16438
16438 - 36666
Type to locate (⌘K)
Coordinate 546055,171339
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700


Mapping 101

Pretty: This method divides the distribution using a series of aesthetically pleasing, rounded values. The splits are not influenced by the data or its distribution. In cases of skewed distribution, this approach can lead to bins containing a low number of values, potentially overlooking important data patterns.


Mapping 101

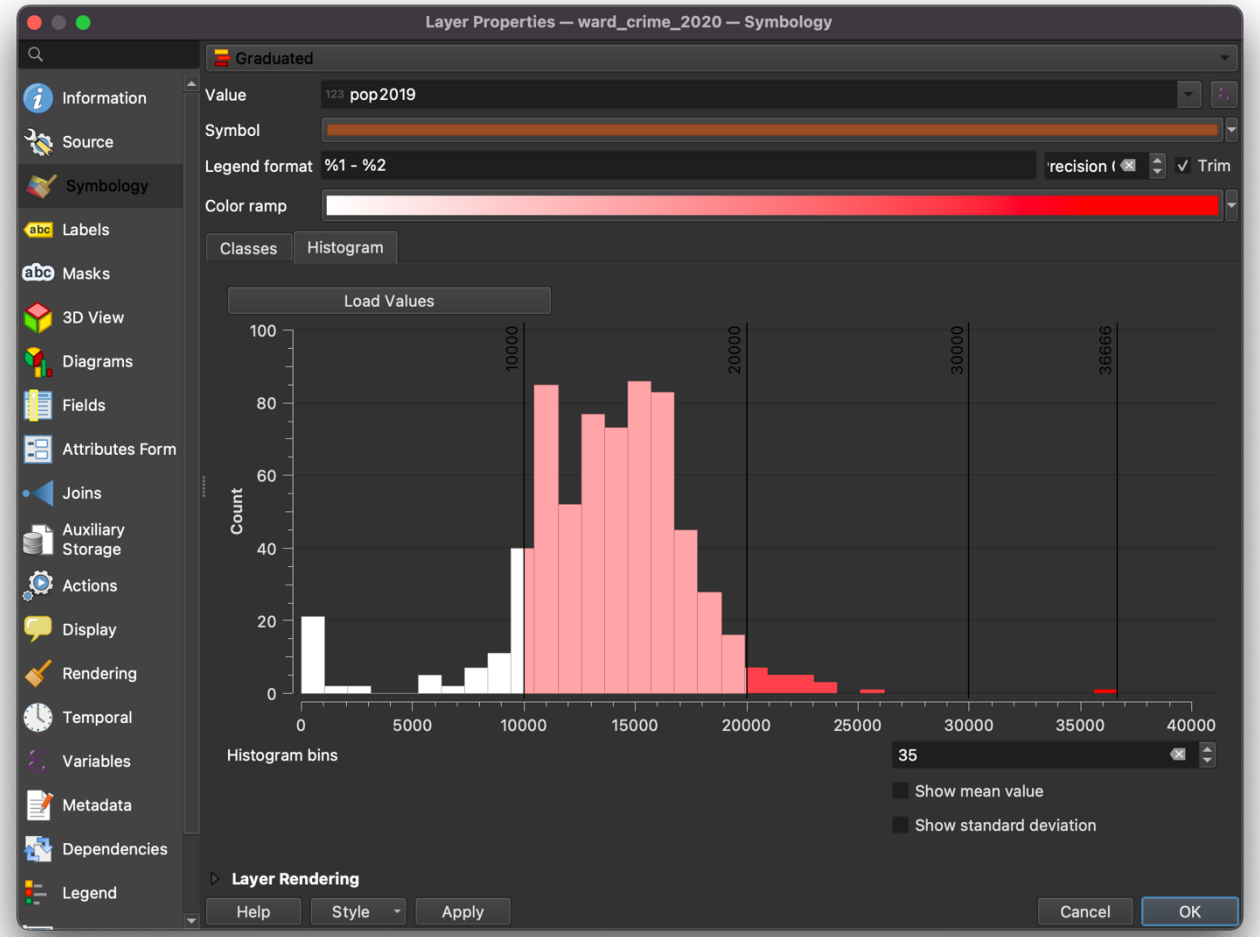

Layer Properties — ward_crime_2020 — Symbology
Information
Source
Symbology
Labels
Masks
3D View
Diagrams
Fields
Attributes Form
Joins
Auxiliary Storage
Actions
Display
Rendering
Temporal
Variables
Metadata
Dependencies
Legend
Graduated
Value
pop2019
Symbol
Legend format
%1 - %2
Trim
Color ramp
Classes
Histogram
Load Values
Count
Histogram bins
35
Show mean value
Show standard deviation
Layer Rendering
Help
Style
Apply
Cancel
OK


Mapping 101

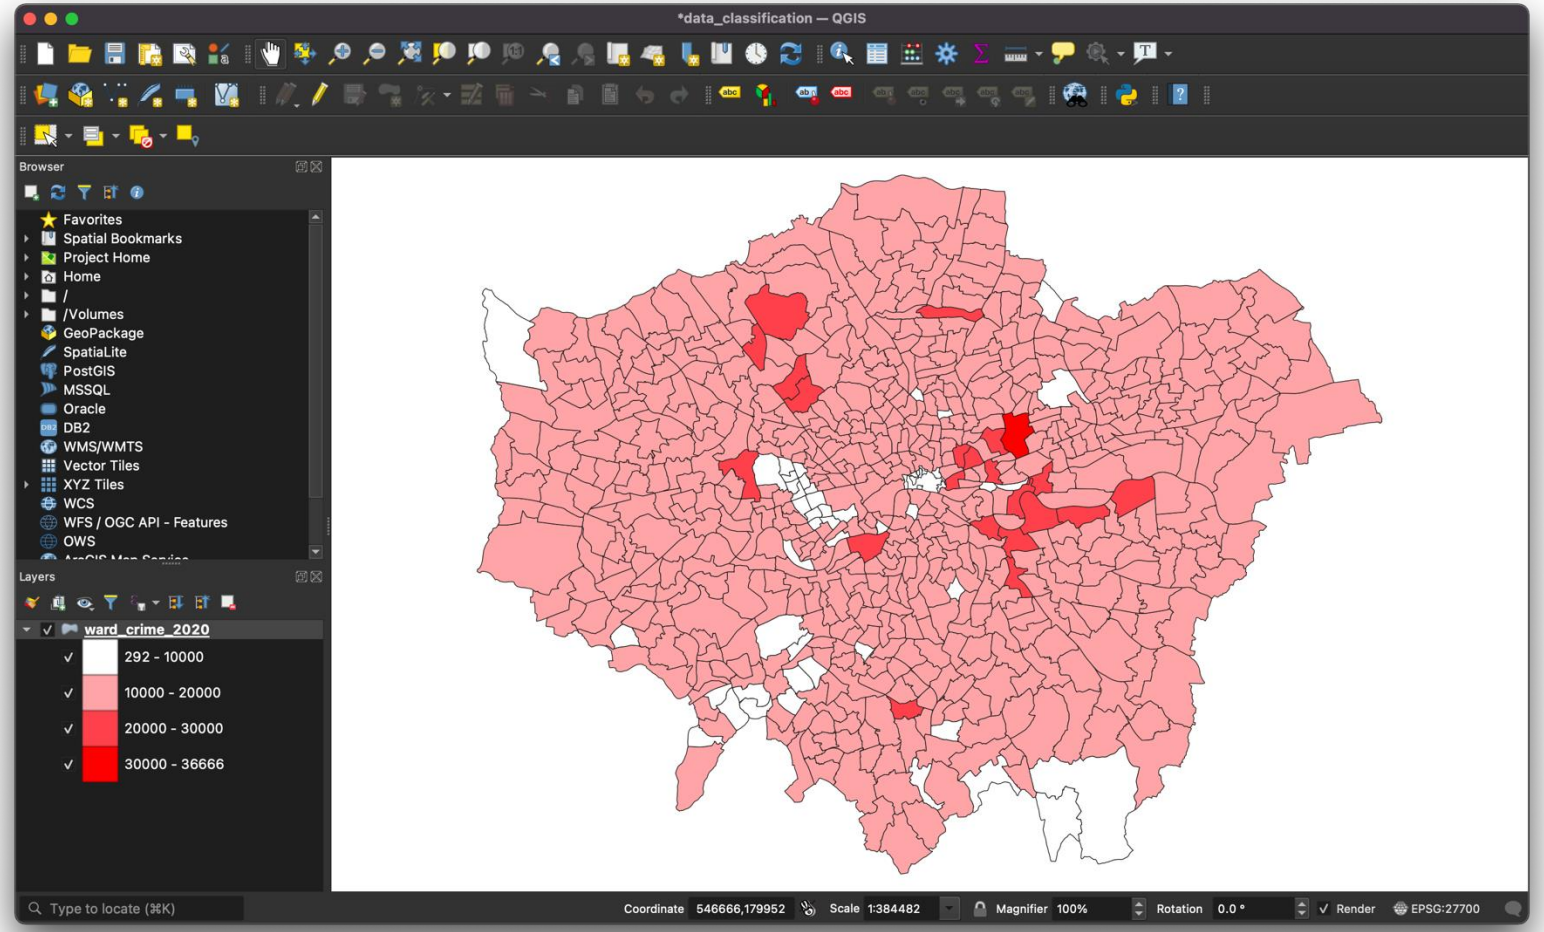

*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
292 - 10000
10000 - 20000
20000 - 30000
30000 - 36666
Type to locate (⌘K)
Coordinate 546666,179952
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700

Different classifications, different maps

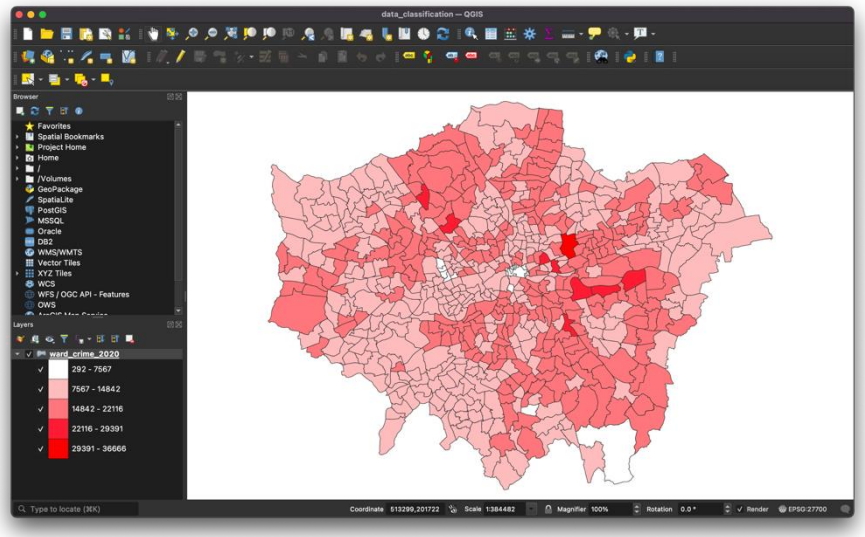

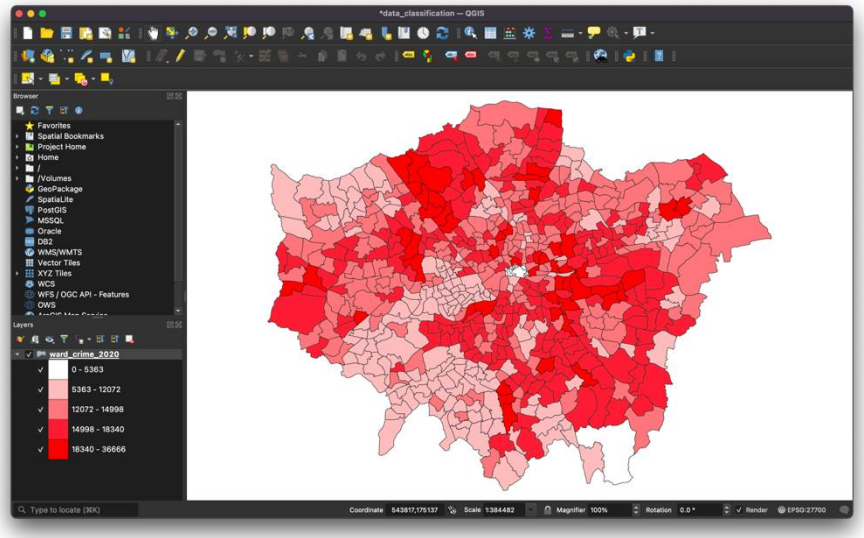

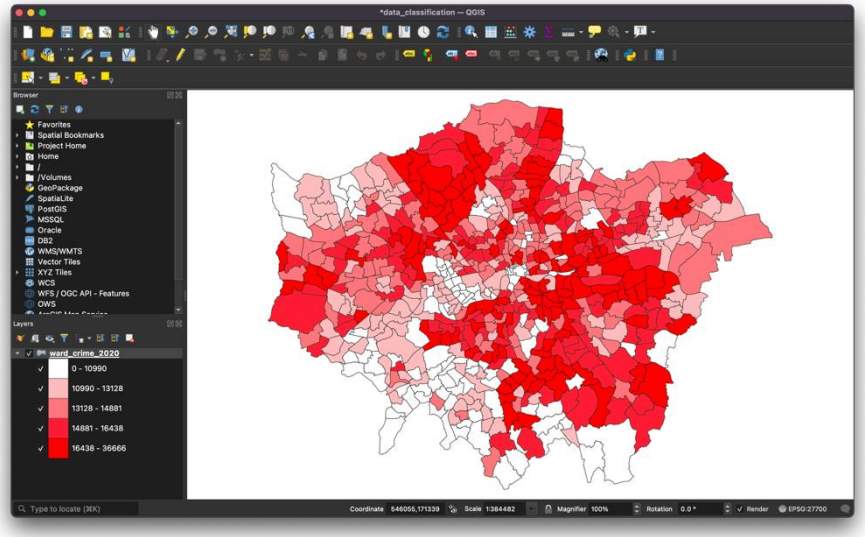


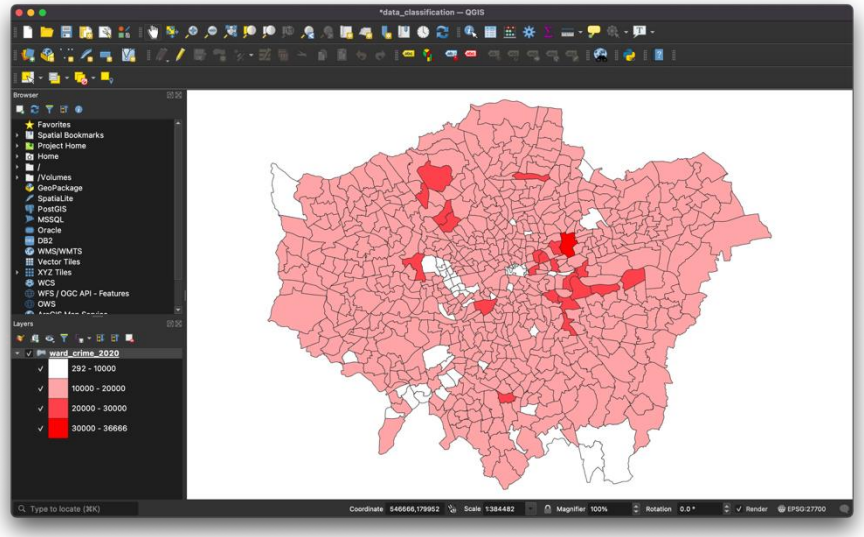


Mapping 101

Standardisation: Plotting raw numbers on choropleth maps should generally be avoided, as it can be misleading. Standardisation is achieved by dividing the variable of interest (numerator) by a standardising variable (denominator), such as total population, area, or another relevant metric. This approach allows for more accurate and meaningful comparisons across different regions or units.

Mapping 101

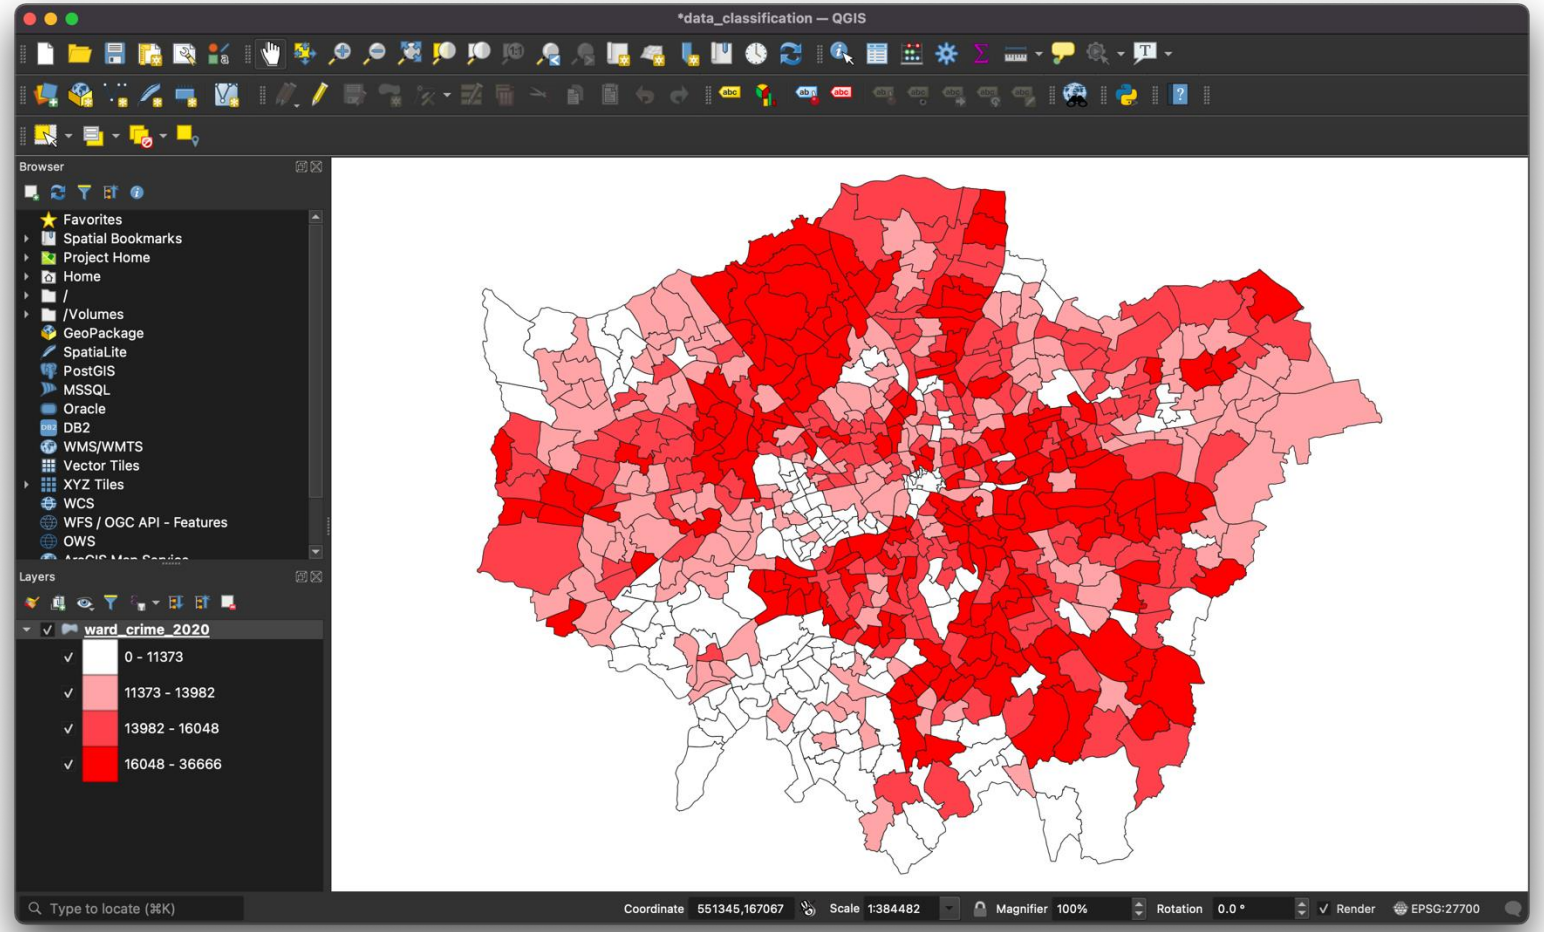
*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
0 - 11373
11373 - 13982
13982 - 16048
16048 - 36666
Type to locate (⌘K)
Coordinate 551345,167067
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700

Mapping 101

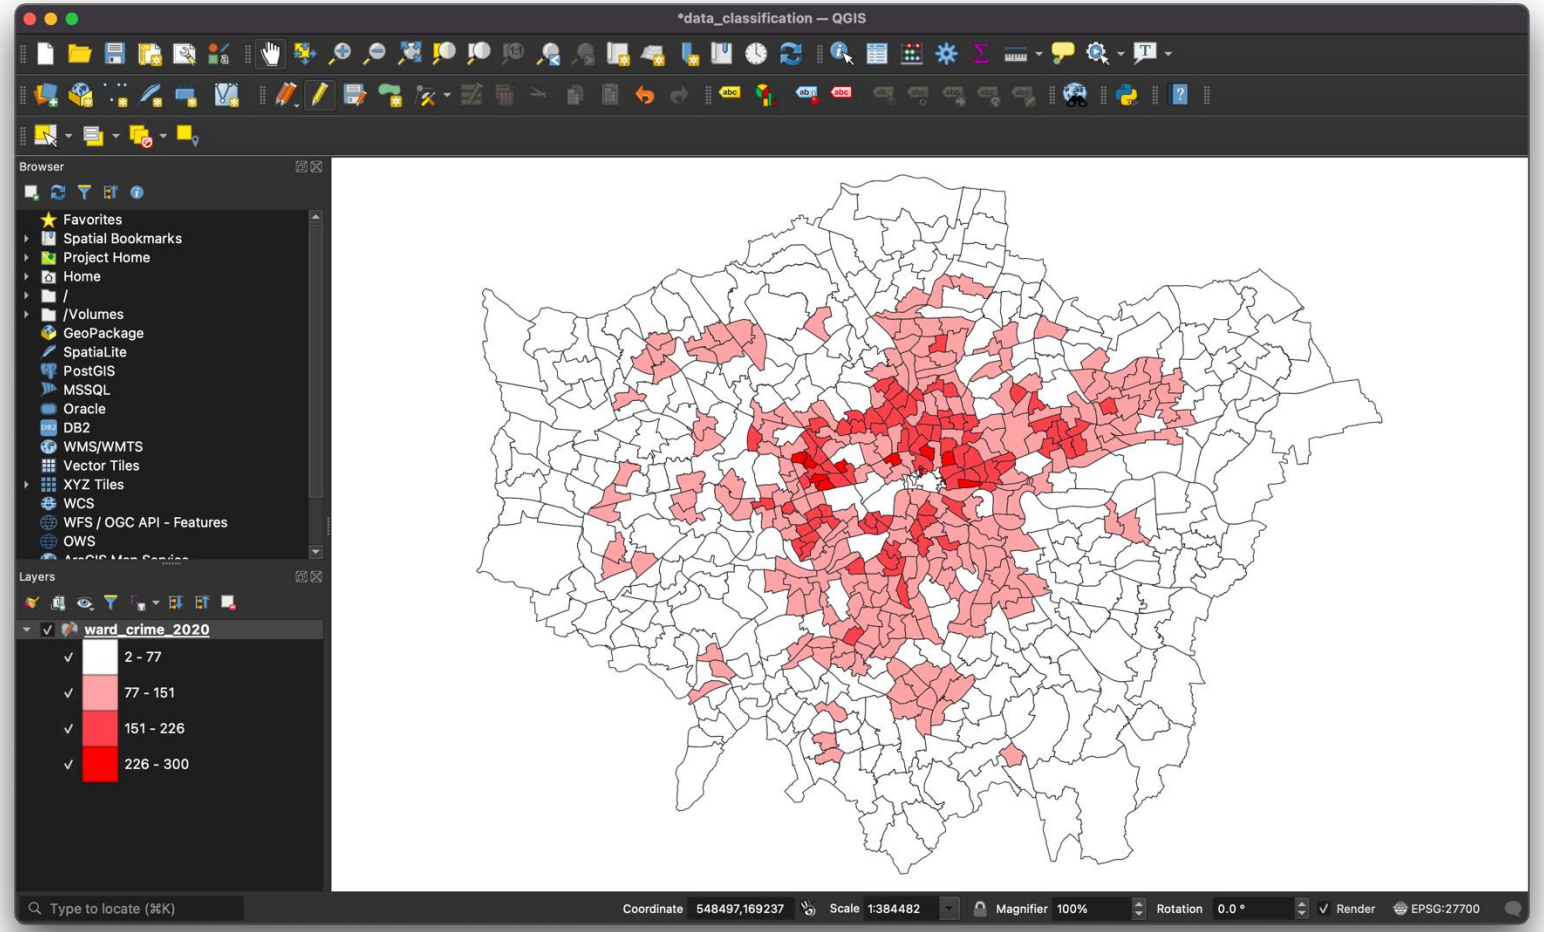
*data_classification — QGIS
Browser
Favorites
Spatial Bookmarks
Project Home
Home
/
/Volumes
GeoPackage
SpatiaLite
PostGIS
MSSQL
Oracle
DB2
WMS/WMTS
Vector Tiles
XYZ Tiles
WCS
WFS / OGC API - Features
OWS
Layers
ward_crime_2020
2 - 77
77 - 151
151 - 226
226 - 300
Type to locate (⌘K)
Coordinate 548497,169237
Scale 1:384482
Magnifier 100%
Rotation 0.0 °
Render
EPSG:27700


Mapping 101

Publishable maps should include the following essential elements:


- Title
- Legend
- Scale bar / scale text
- North arrow
- And: attribution and data sources

Optional:

- Text and labels can be important for providing context, but may sometimes be distracting, depending on the map's purpose.

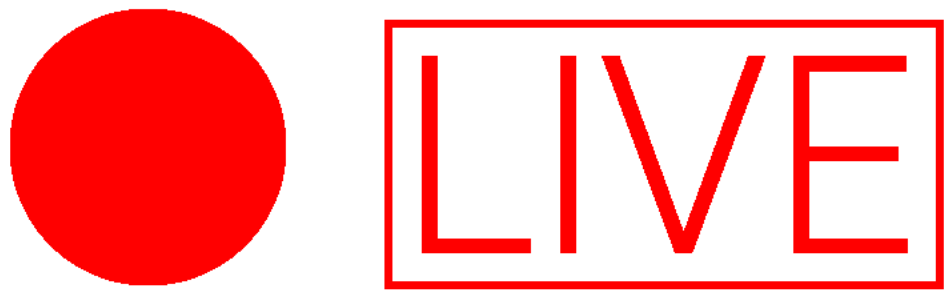
LIVE

Mapping 101

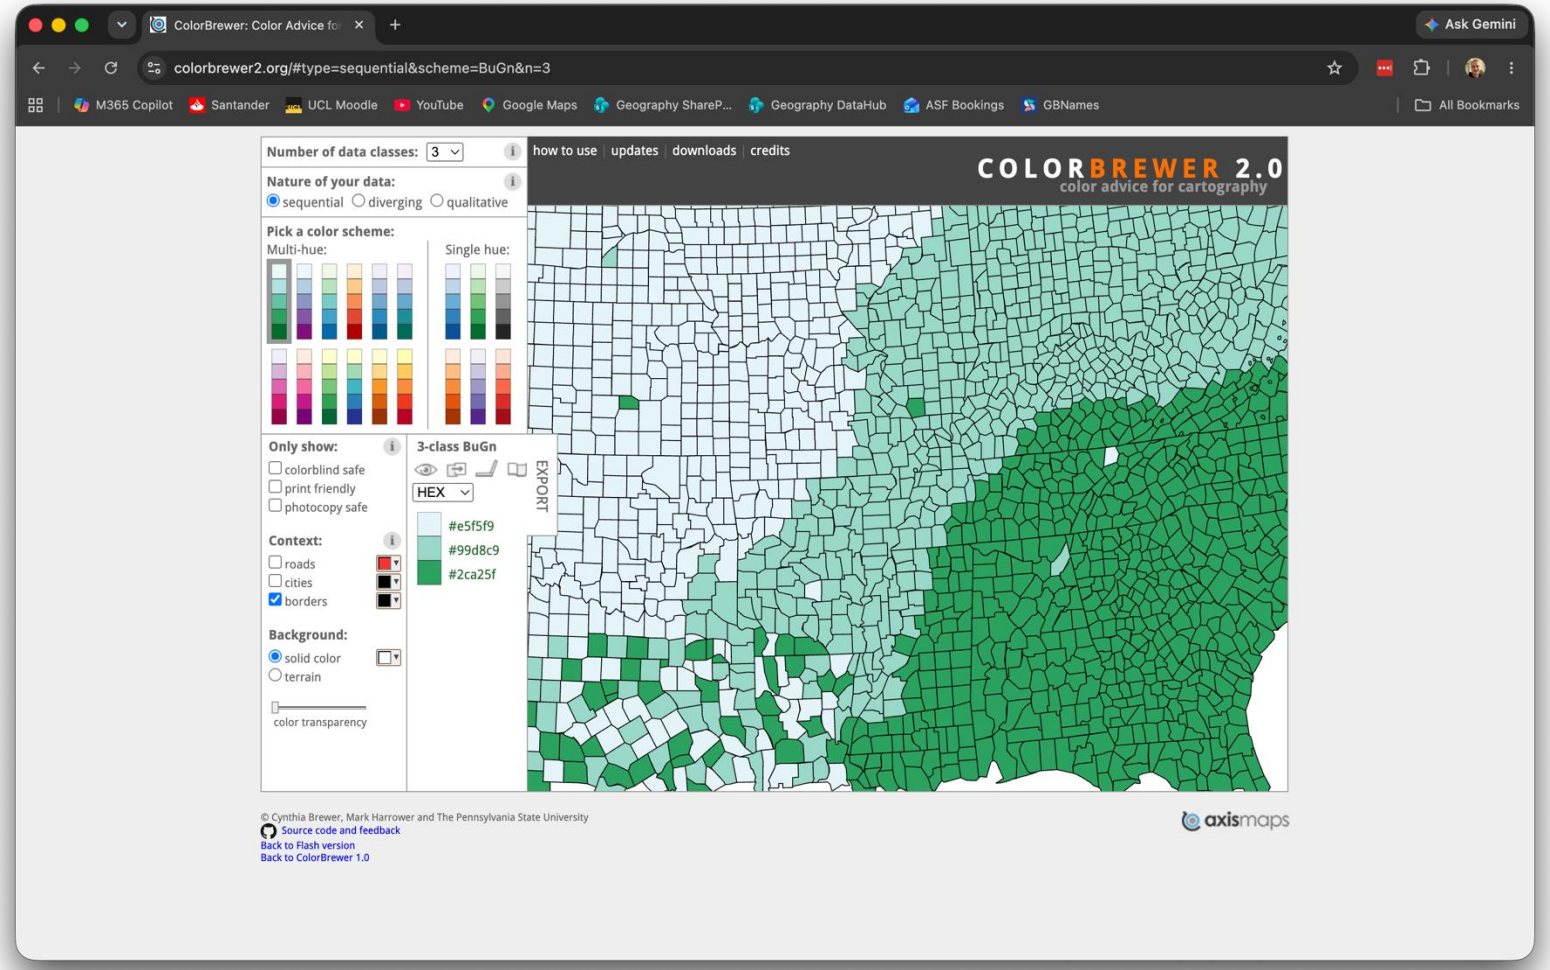

ColorBrewer: Color Advice fo
Ask Gemini
colorbrewer2.org/#type=sequential&scheme=BuGn&n=3
M365 Copilot
Santander
UCL Moodle
YouTube
Google Maps
Geography ShareP...
Geography DataHub
ASF Bookings
GBNames
All Bookmarks
Number of data classes: 3
Nature of your data:
sequential
diverging
qualitative
Pick a color scheme:
Multi-hue:
Single hue:
Only show:
colorblind safe
print friendly
photocopy safe
Context:
roads
cities
borders
Background:
solid color
terrain
color transparency
3-class BuGn
EXPORT
HEX
#e5f5f9
#99d8c9
#2ca25f
how to use | updates | downloads | credits
COLORBREWER 2.0
color advice for cartography
© Cynthia Brewer, Mark Harrower and The Pennsylvania State University
Source code and feedback
Back to Flash version
Back to ColorBrewer 1.0
axismaps

Cartography



Cheshire and Uberti. Atlas Of The Invisible

Cartography

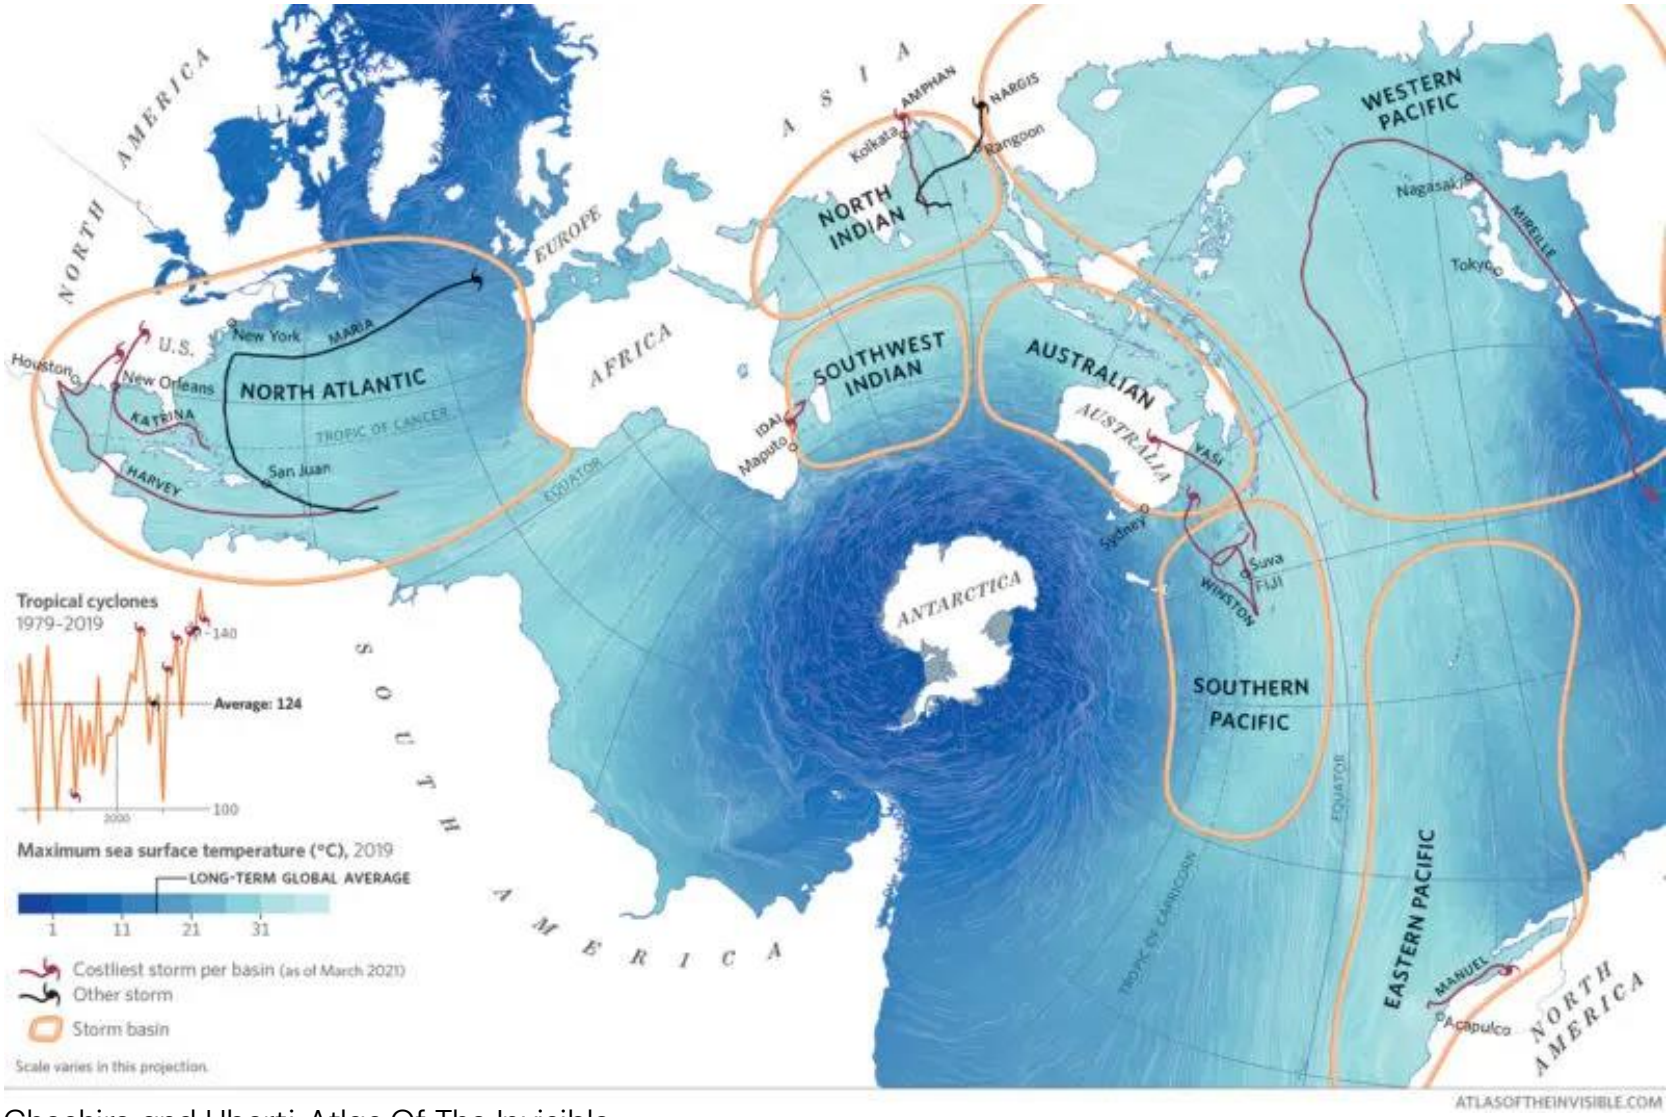

Cheshire and Uberti. Atlas Of The Invisible

Mentimeter

- Go to www.menti.com.
- Use code: XXXX XXXX


Break

More spatial analysis


Geocoding

Forename	Surname	Address
Justin	van Dijk	Flat 18 Terry House SW22NT London

Geocoding

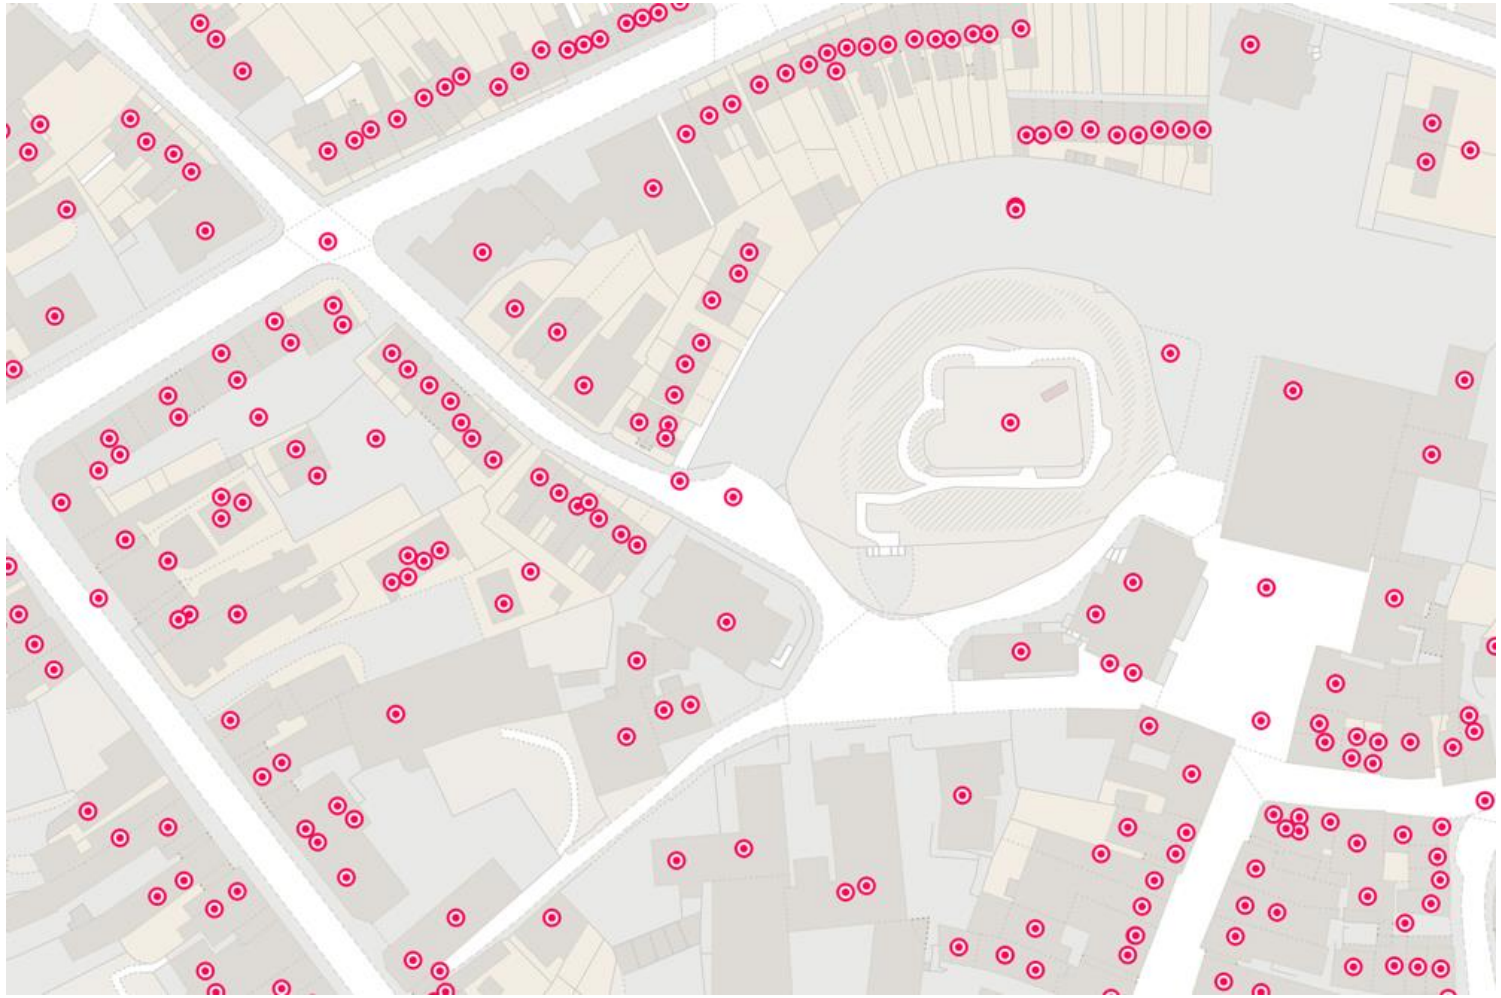


Analysing point data

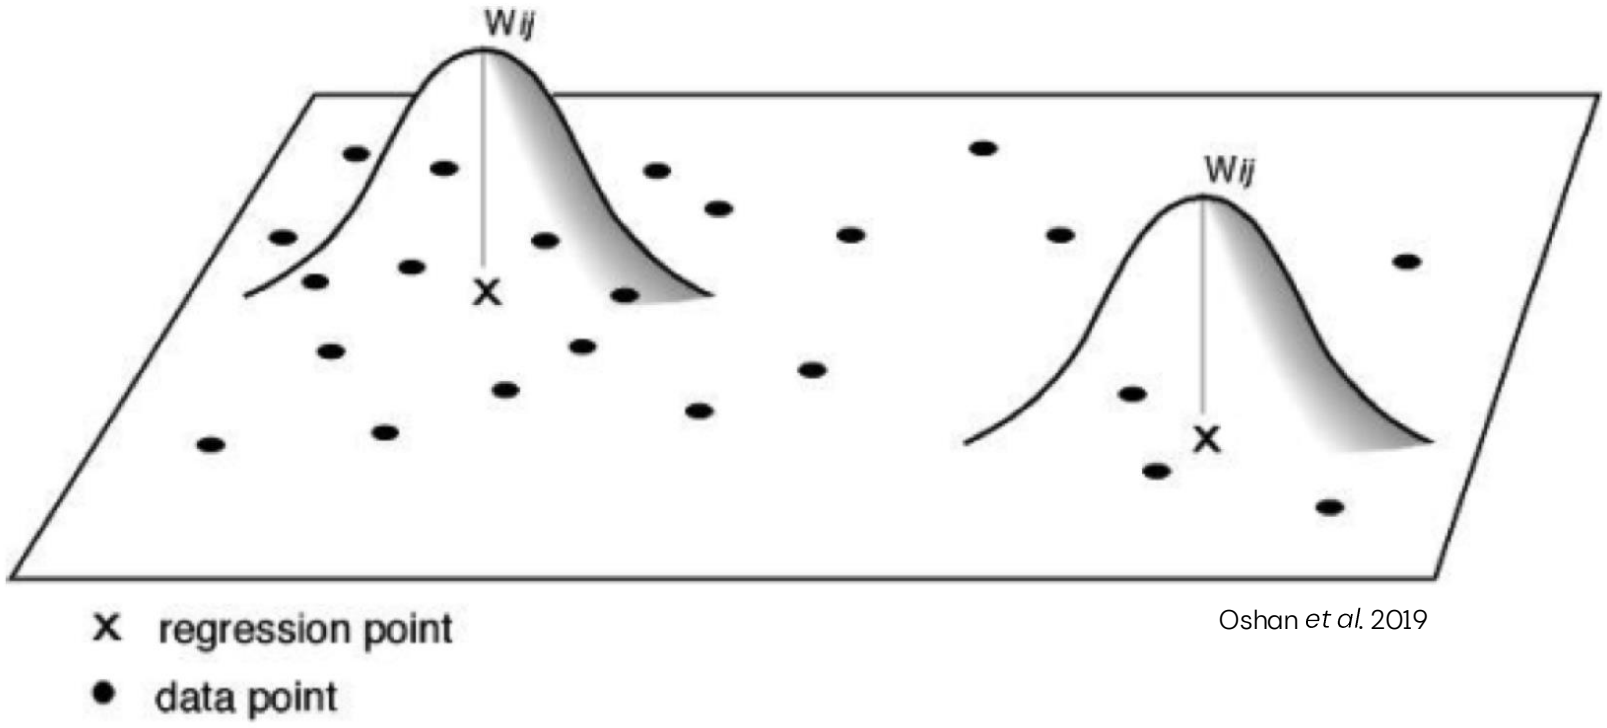

Oshan *et al.* 2019


Analysing point data

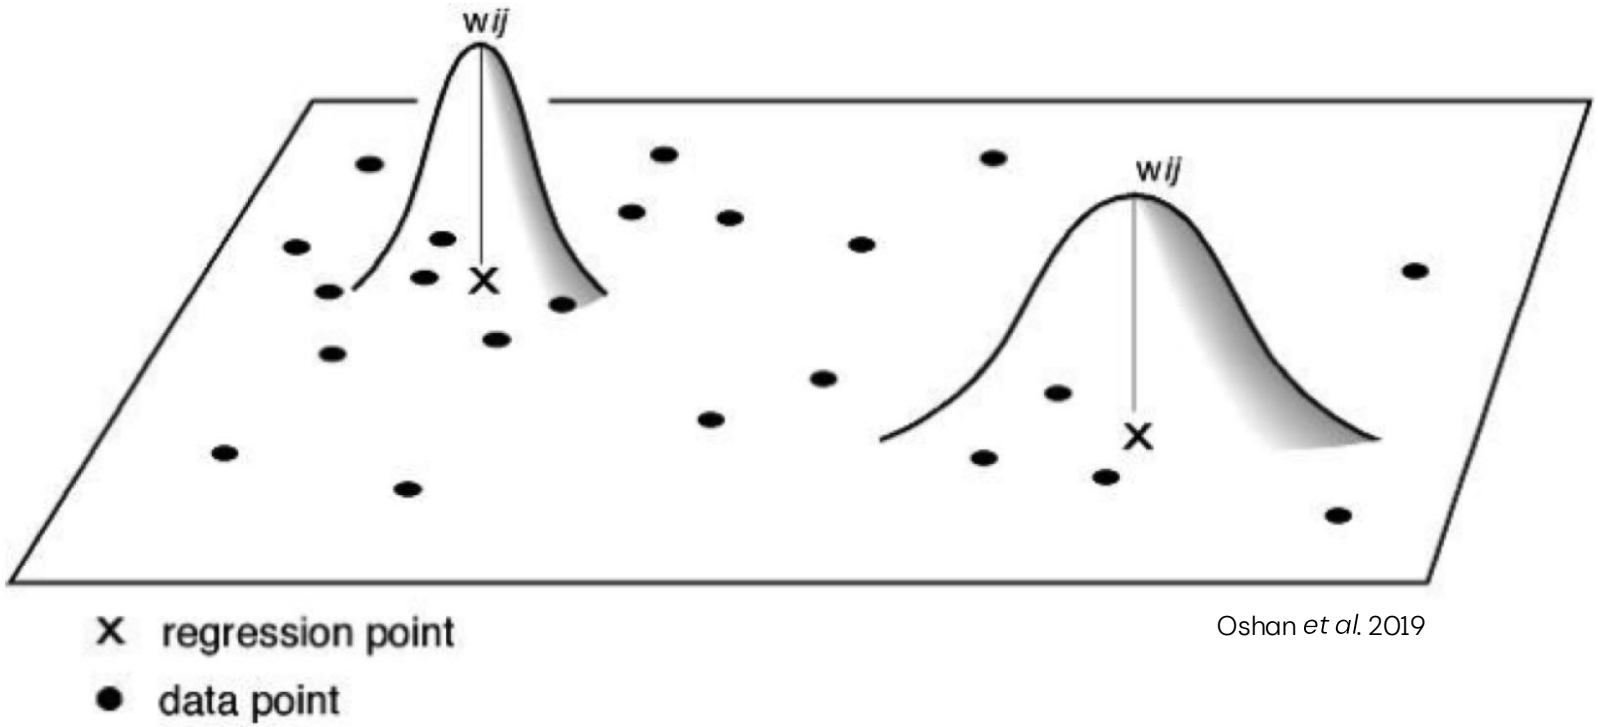

Oshan *et al.* 2019

Spatial operations

NAME
Androscoggin
Aroostook
Cumberland
Franklin
Hancock
Kennebec
Knox
Lincoln
Oxford
Penobscot
Piscataquis
Sagadahoc
Somerset
Waldo
Washington
York

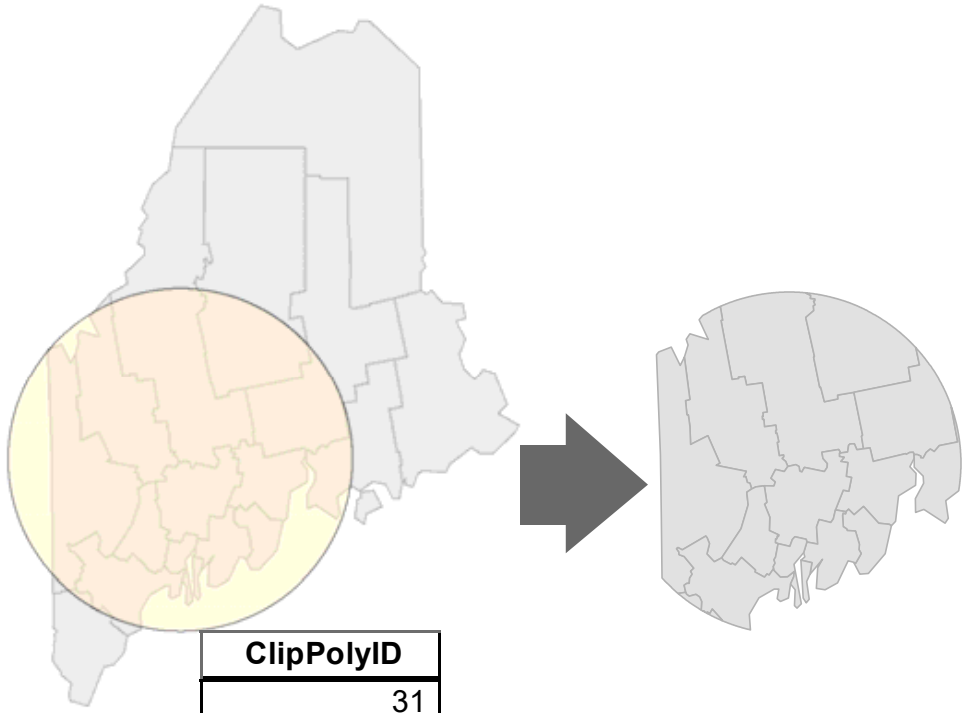


ClipPolyID
31

NAME
Androscoggin
Cumberland
Franklin
Hancock
Kennebec
Knox
Lincoln
Oxford
Penobscot
Piscataquis
Sagadahoc
Somerset
Waldo
York

Gimond, M. 2021. Intro to GIS and Spatial Analysis. [online]
https://mgimond.github.io/Spatial/introGIS.html

Spatial operations

NAME
Androscoggin
Aroostook
Cumberland
Franklin
Hancock
Kennebec
Knox
Lincoln
Oxford
Penobscot
Piscataquis
Sagadahoc
Somerset
Waldo
Washington
York

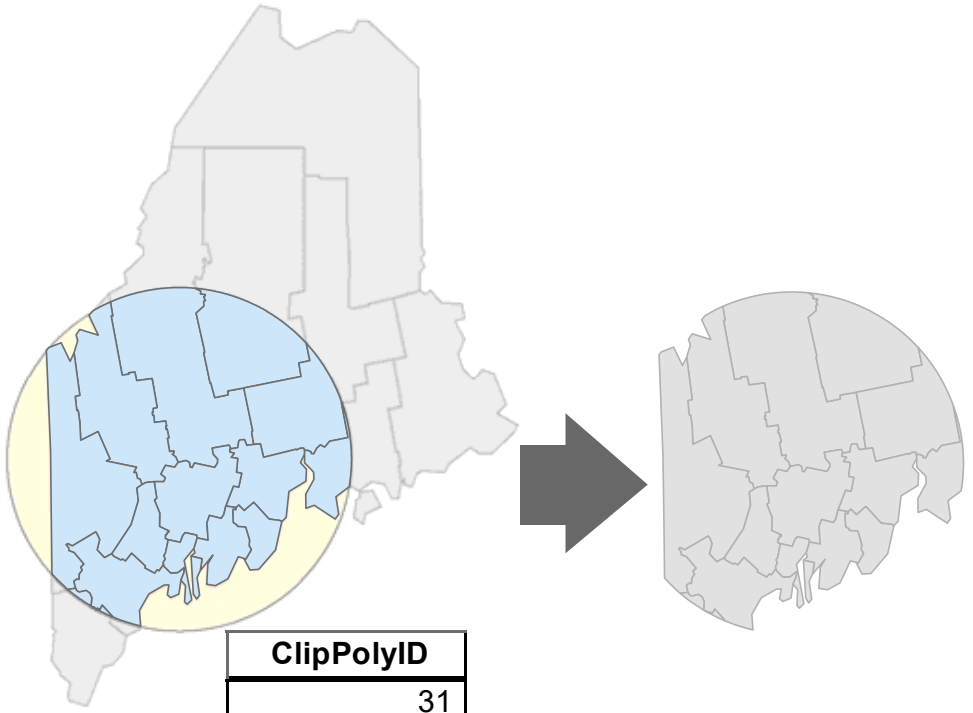


ClipPolyID
31

NAME	ClipPolyID
Androscoggin	31
Cumberland	31
Franklin	31
Hancock	31
Kennebec	31
Knox	31
Lincoln	31
Oxford	31
Penobscot	31
Piscataquis	31
Sagadahoc	31
Somerset	31
Waldo	31
York	31

Gimond, M. 2021. Intro to GIS and Spatial Analysis. [online]
https://mgimond.github.io/Spatial/introGIS.html

Spatial operations

NAME
Androscoggin
Aroostook
Cumberland
Franklin
Hancock
Kennebec
Knox
Lincoln
Oxford
Penobscot
Piscataquis
Sagadahoc
Somerset
Waldo
Washington
York

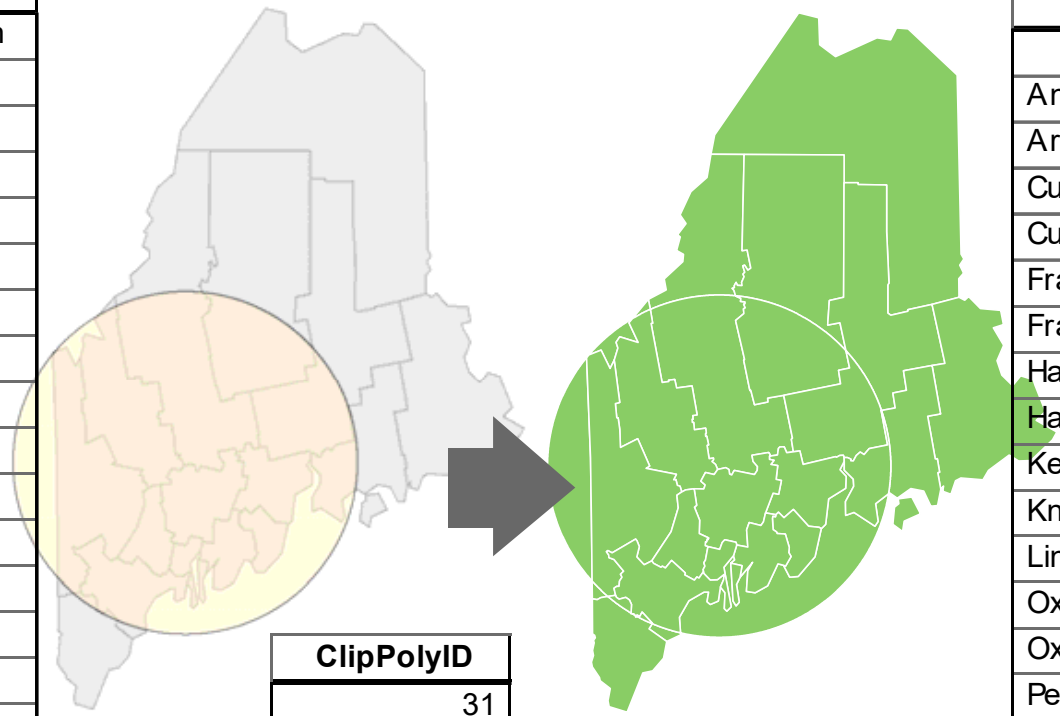


ClipPolyID
31

NAME	ClipPolyID
	31
Androscoggin	31
Aroostook	0
Cumberland	0
Cumberland	31
Franklin	0
Franklin	31
Hancock	0
Hancock	31
Kennebec	31
Knox	31
Lincoln	31
Oxford	0
Oxford	31
Penobscot	0


Gimond, M. 2021. Intro to GIS and Spatial Analysis. [online]
https://mgimond.github.io/Spatial/introGIS.html

Spatial operations

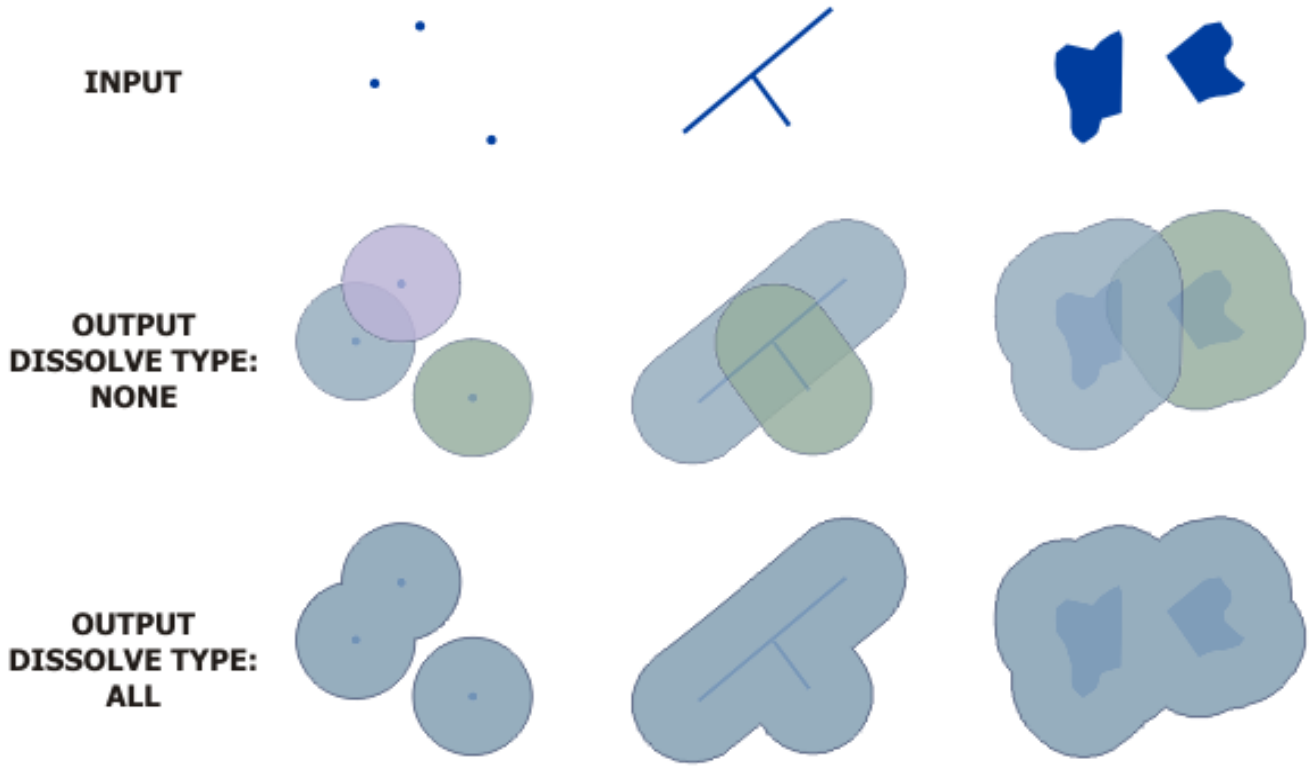


ESRI. 2021. Buffer. [online]
https://pro.arcgis.com/en/pro-app/latest/tool-reference/analysis/buffer.htm

Spatial dependence

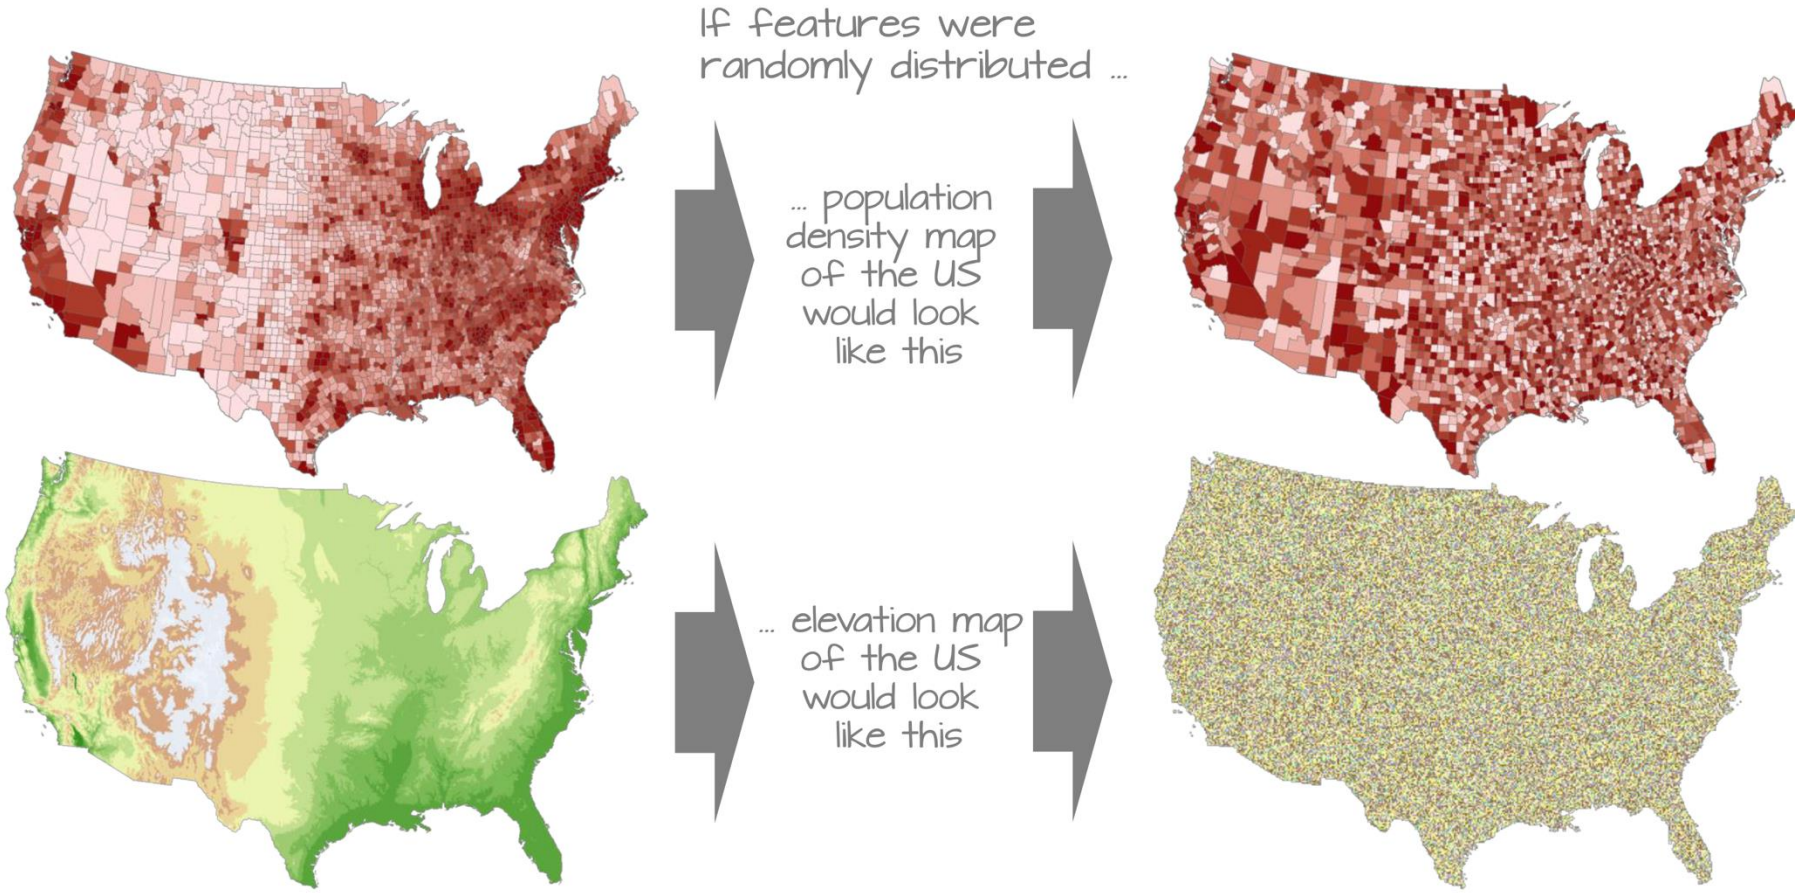


Gimond, M. 2021. Intro to GIS and Spatial Analysis. [online]
https://mgimond.github.io/Spatial/introGIS.html


Geographically weighted regression

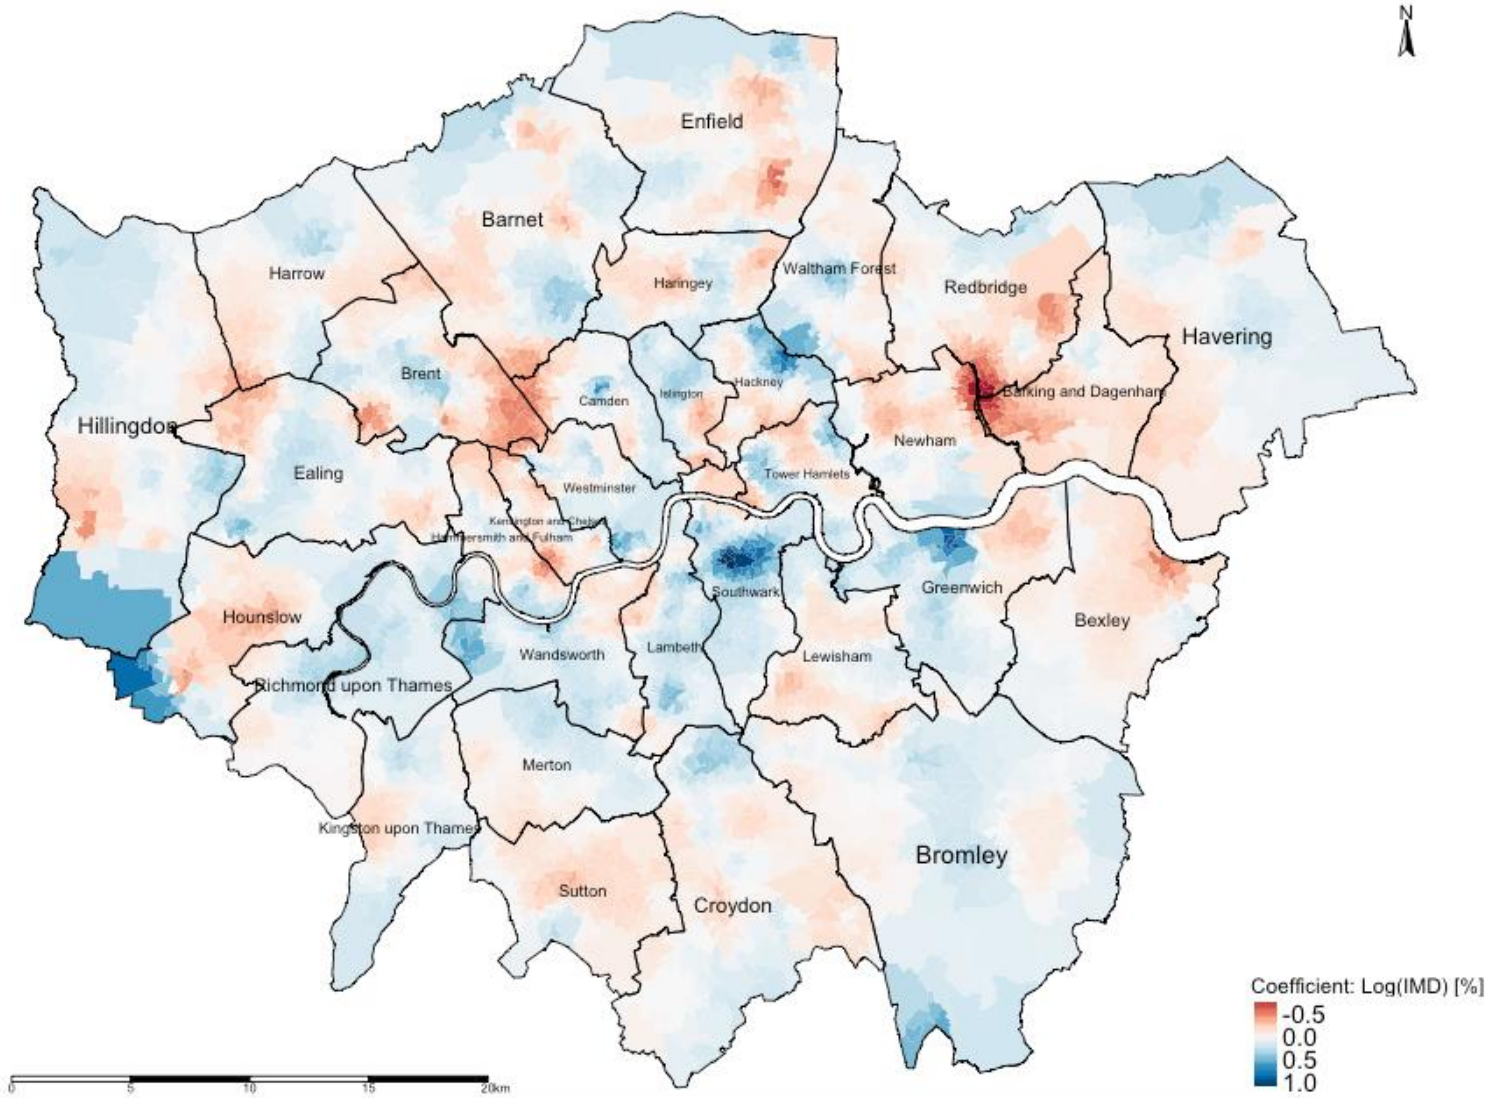


Geographically weighted regression

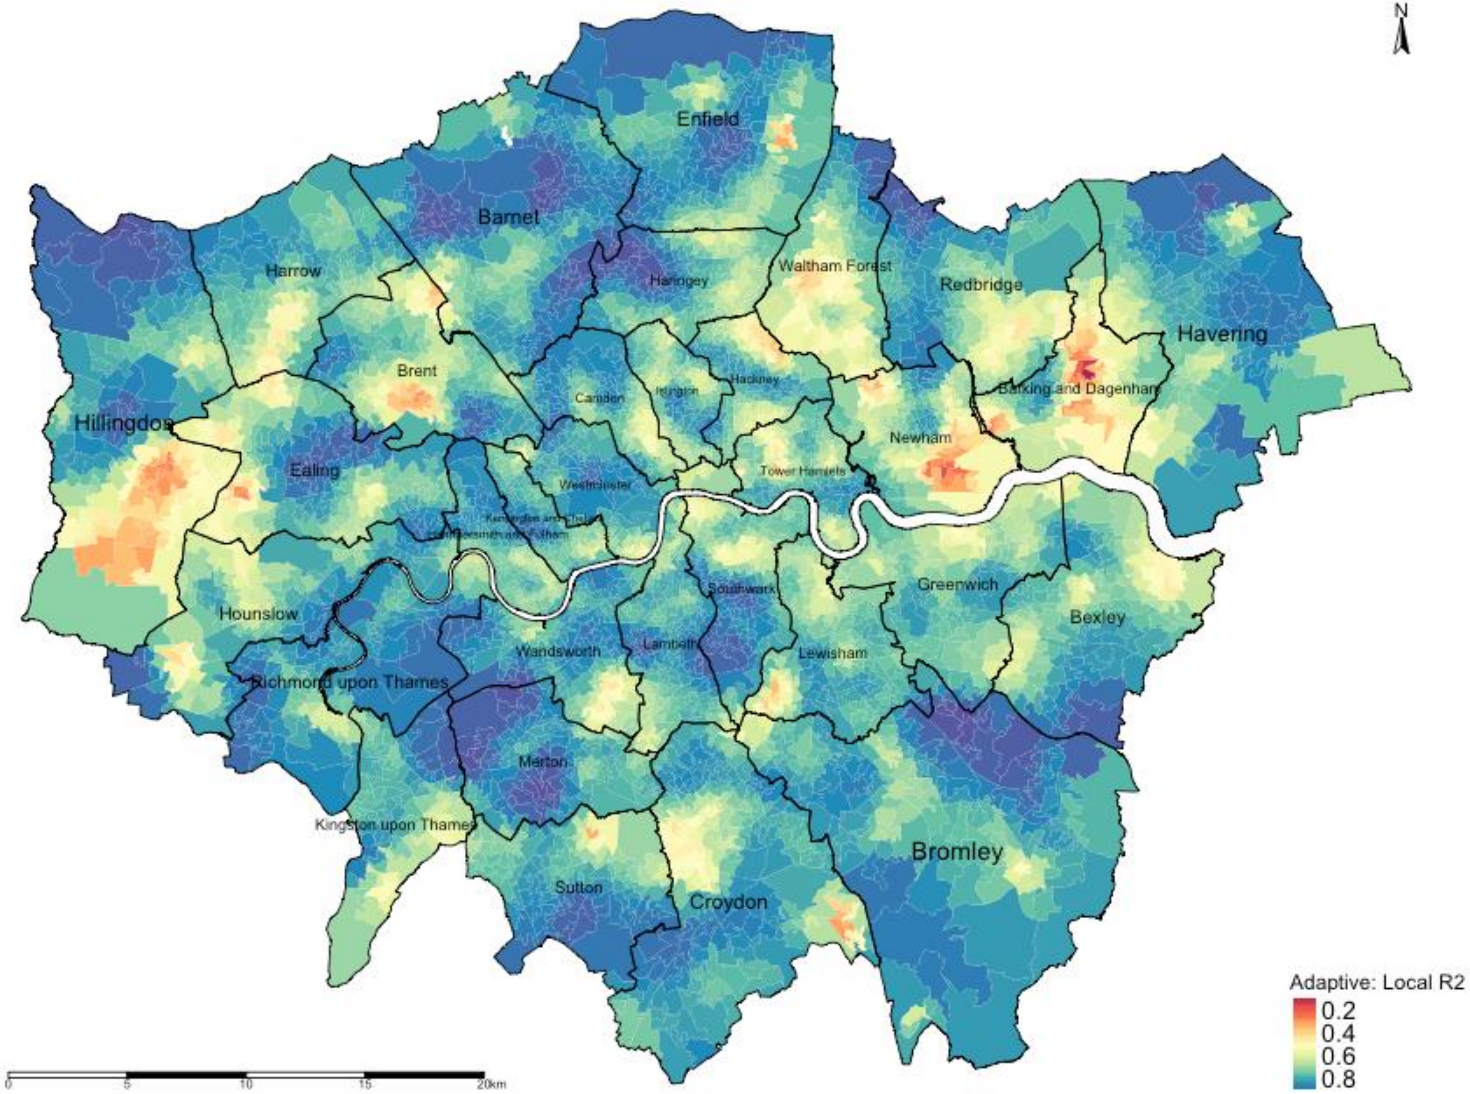


Raster data

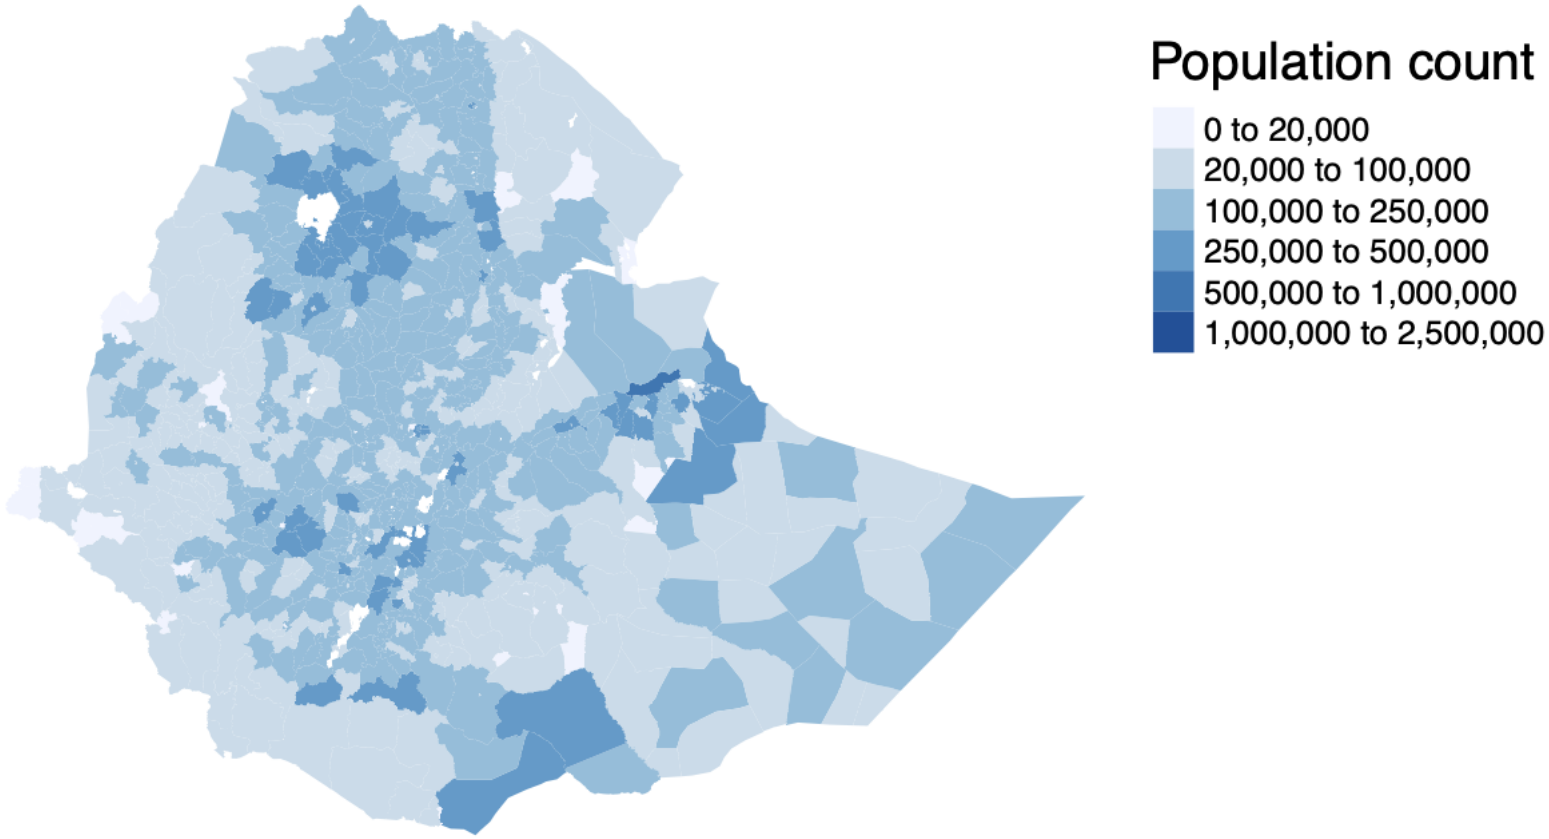
Population count
0 to 20,000
20,000 to 100,000
100,000 to 250,000
250,000 to 500,000
500,000 to 1,000,000
1,000,000 to 2,500,000


Raster data

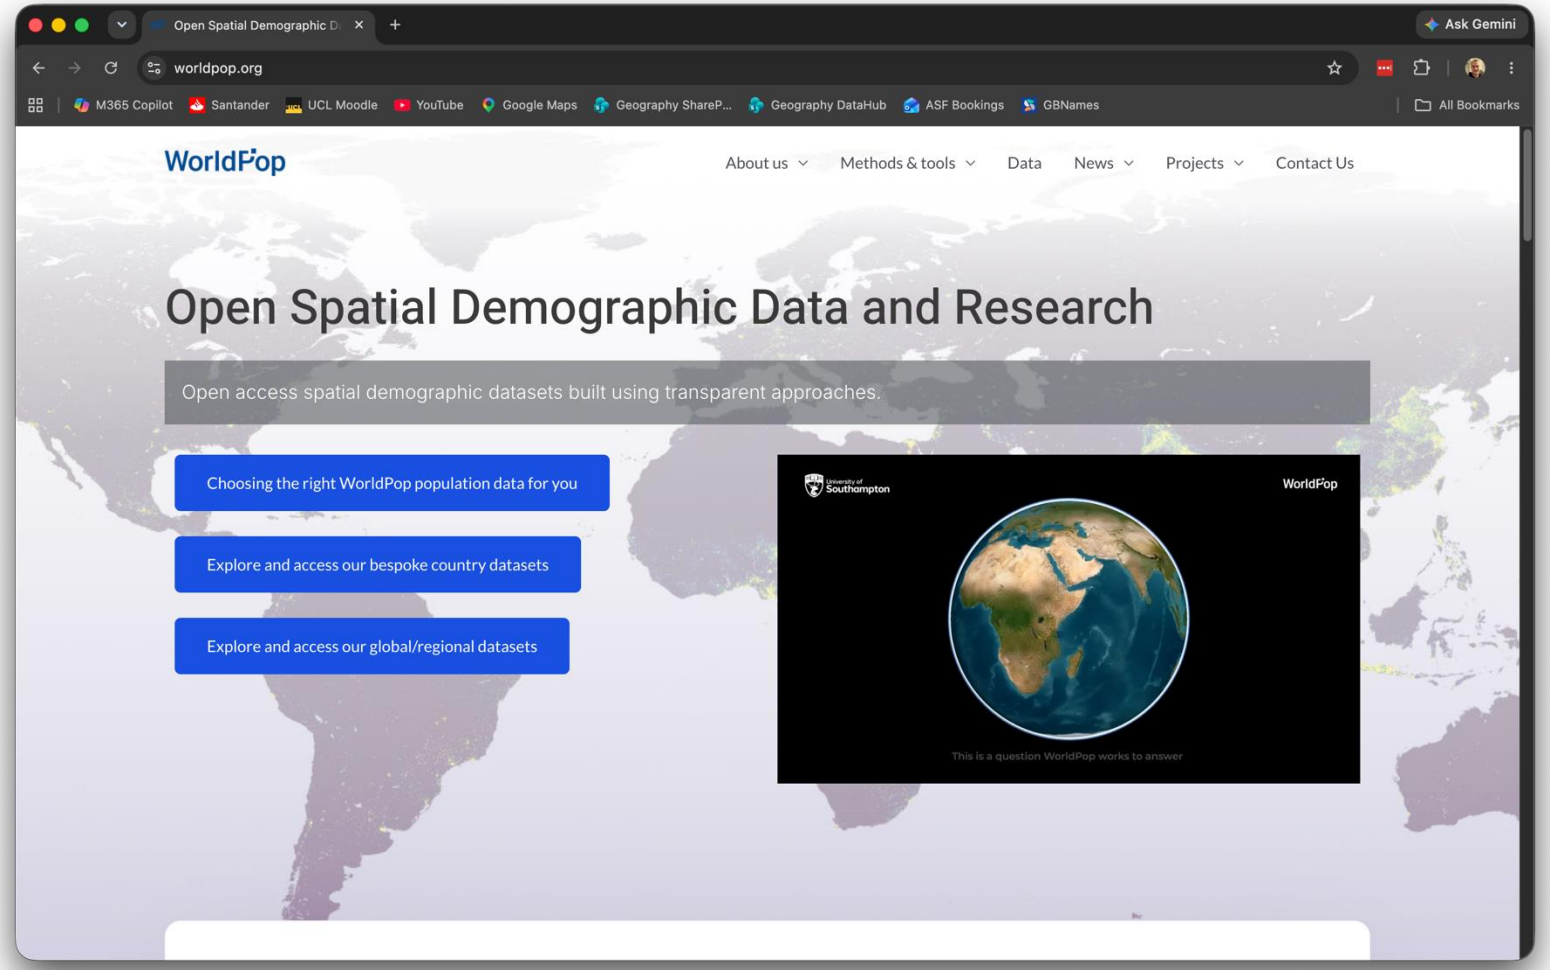
Open Spatial Demographic D
Ask Gemini
worldpop.org
M365 Copilot
Santander
UCL Moodle
YouTube
Google Maps
Geography ShareP...
Geography DataHub
ASF Bookings
GBNames
All Bookmarks
WorldPop
About us
Methods & tools
Data
News
Projects
Contact Us
Open Spatial Demographic Data and Research
Open access spatial demographic datasets built using transparent approaches.
Choosing the right WorldPop population data for you
Explore and access our bespoke country datasets
Explore and access our global/regional datasets
University of Southampton
WorldPop
This is a question WorldPop works to answer


Raster data

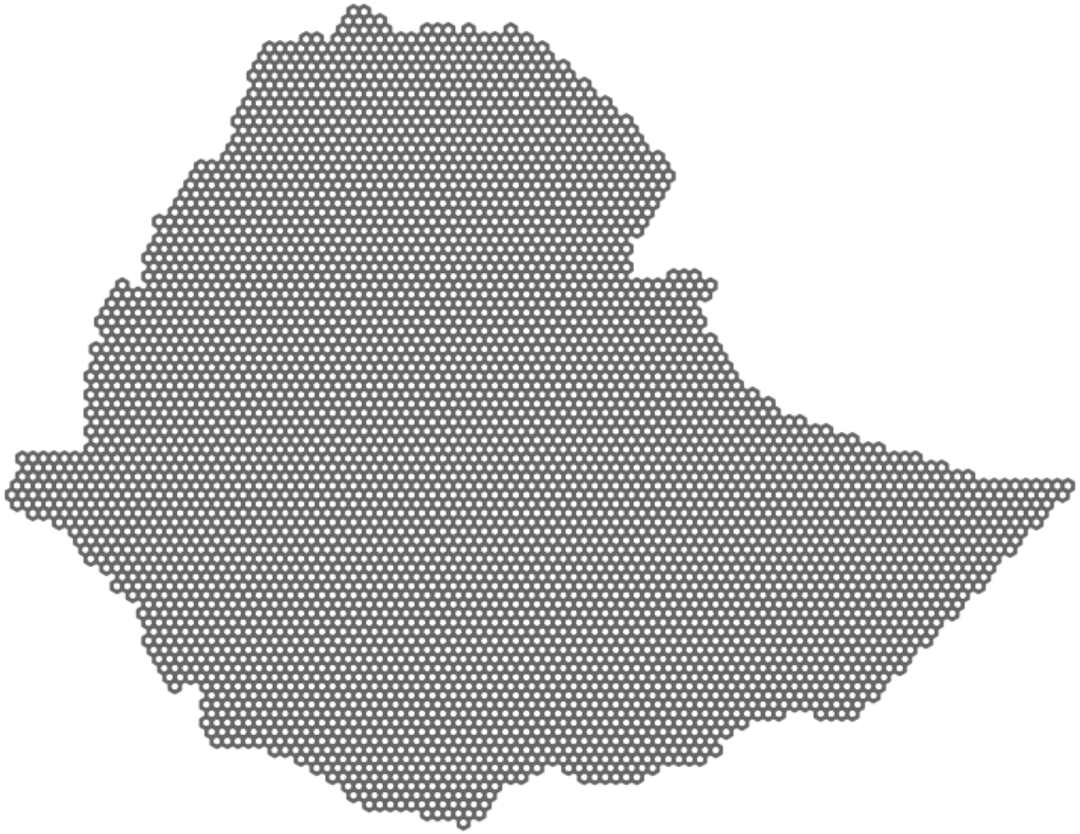

Raster data

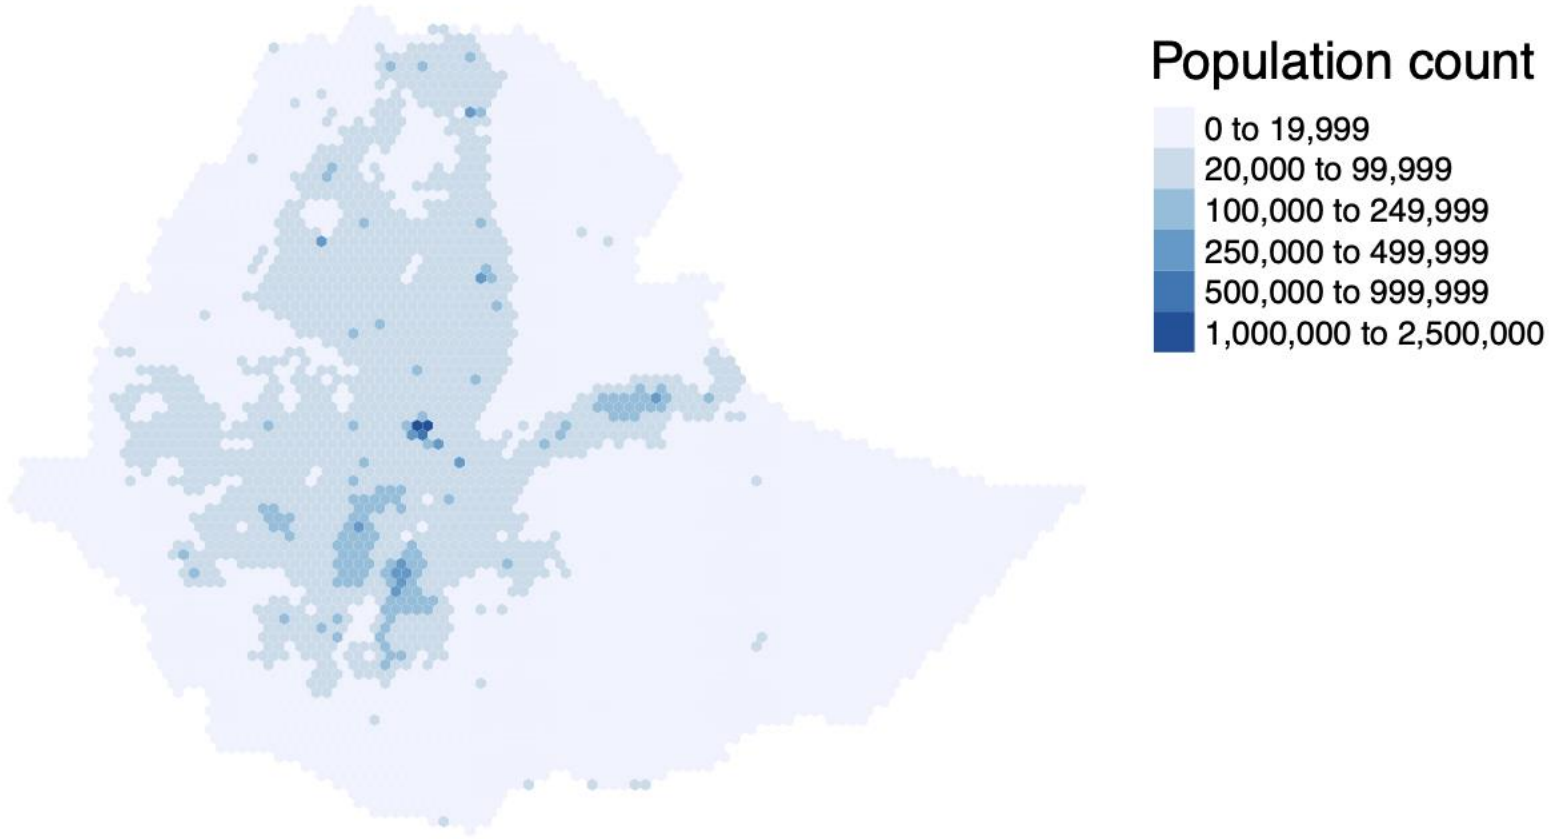

Population count
0 to 19,999
20,000 to 99,999
100,000 to 249,999
250,000 to 499,999
500,000 to 999,999
1,000,000 to 2,500,000

Accessibility analysis

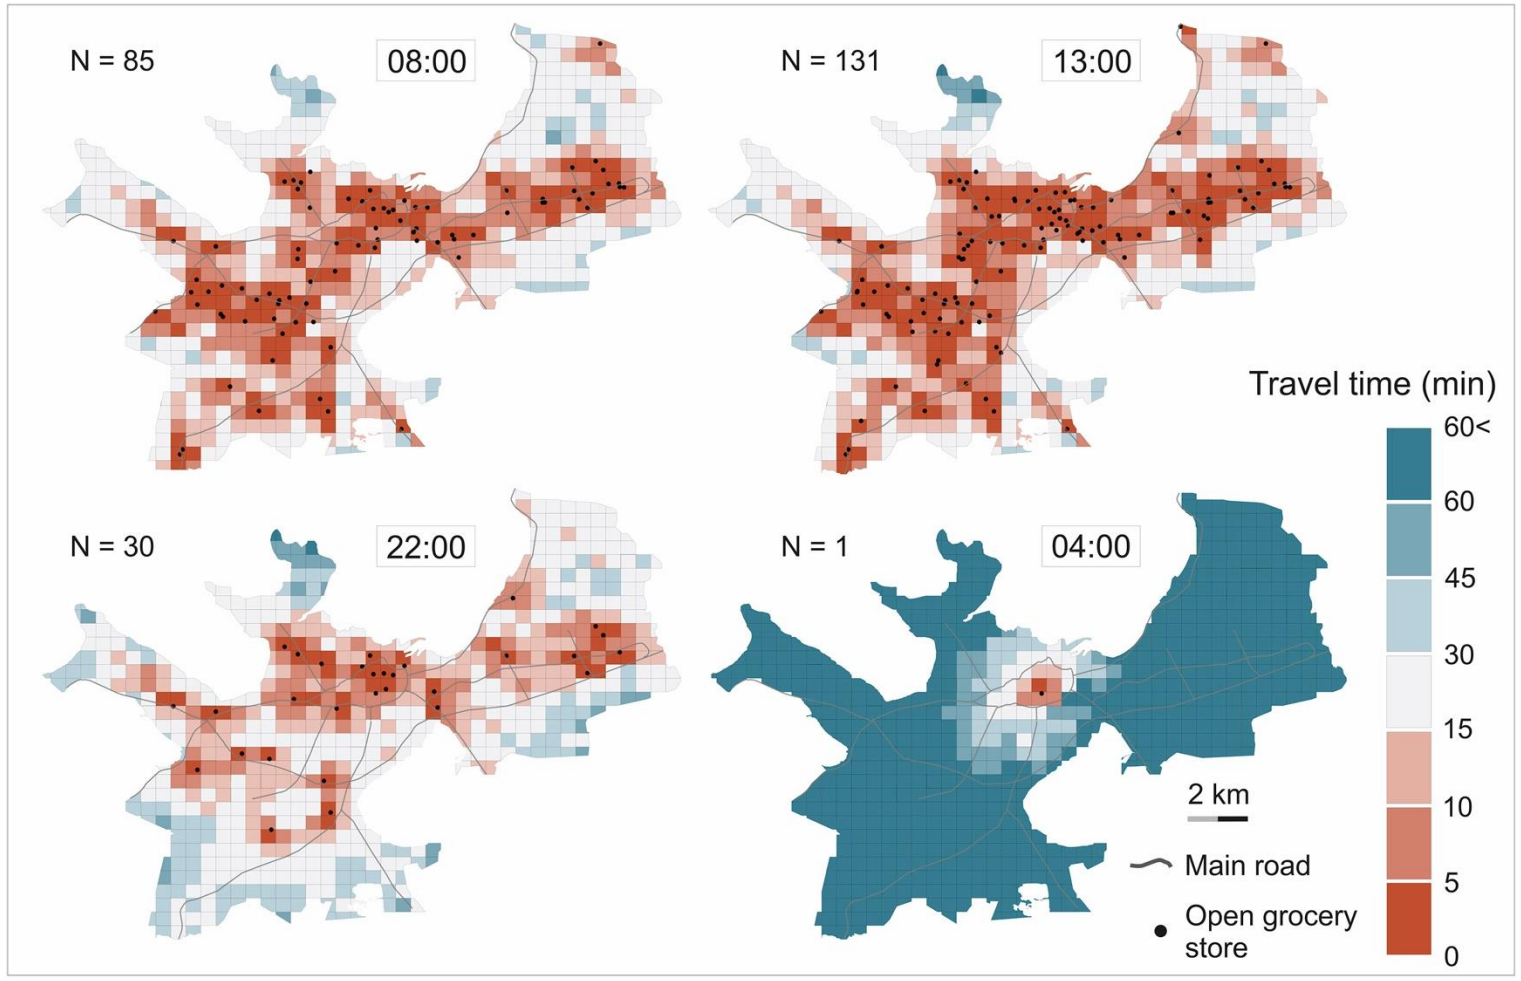


Järv *et al.* 2018


Accessibility analysis

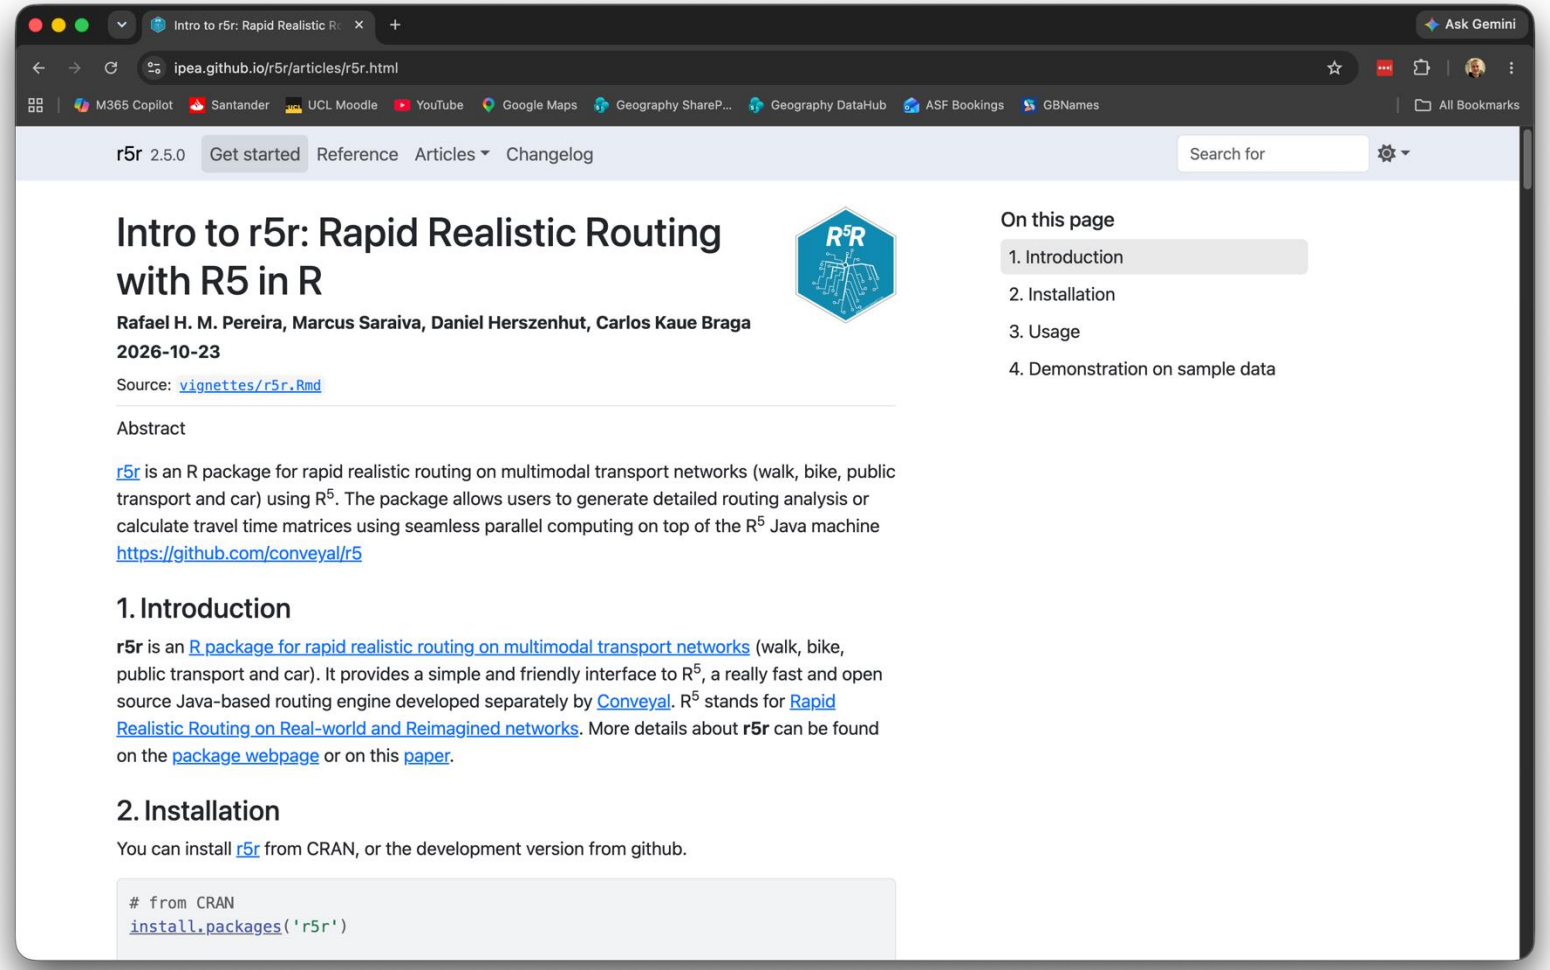

Accessibility analysis

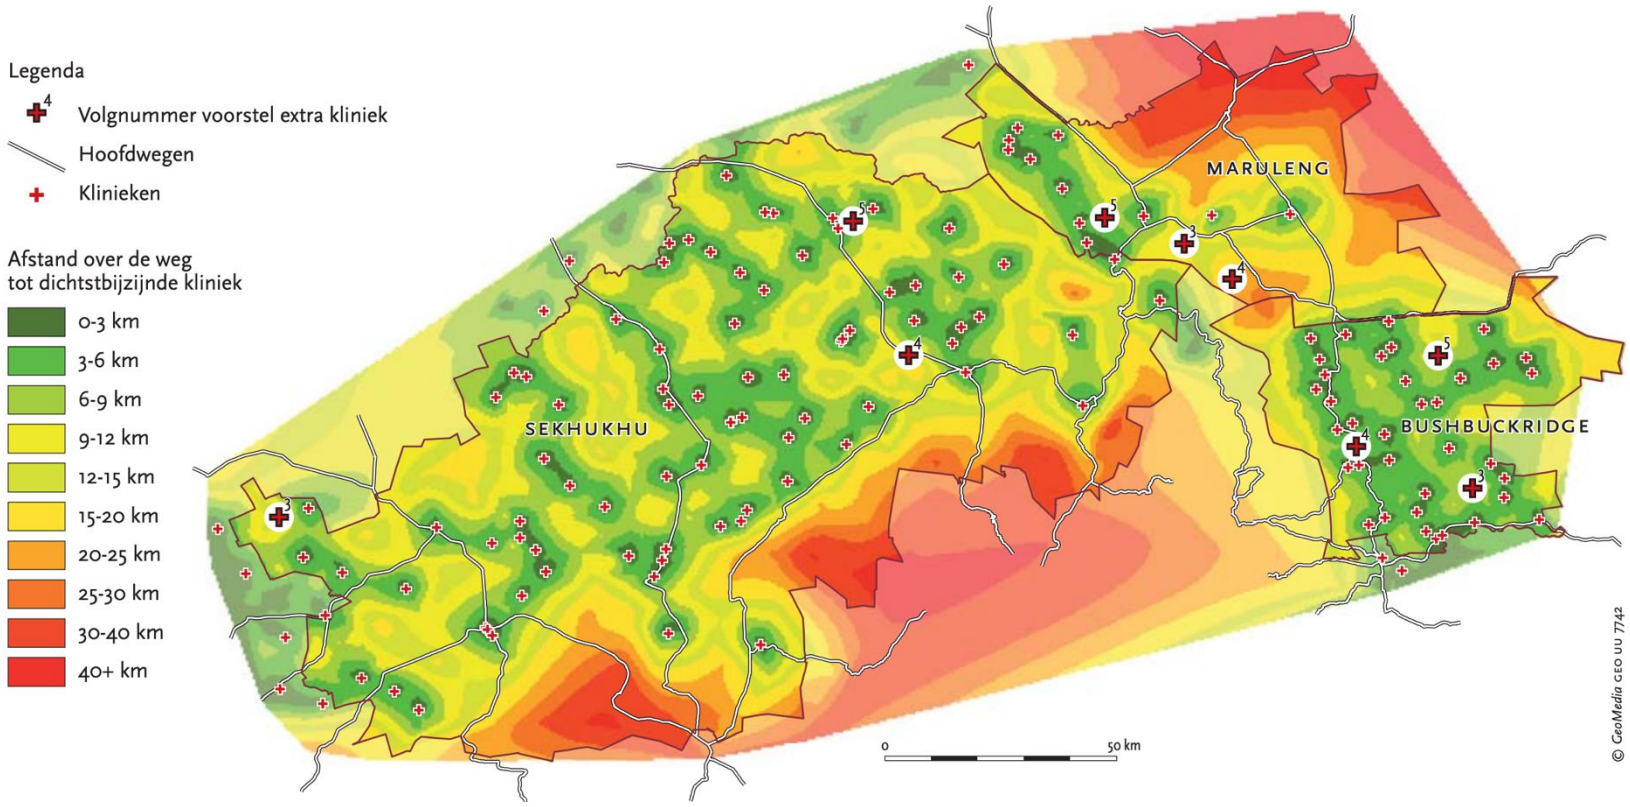

Geodemographic classification

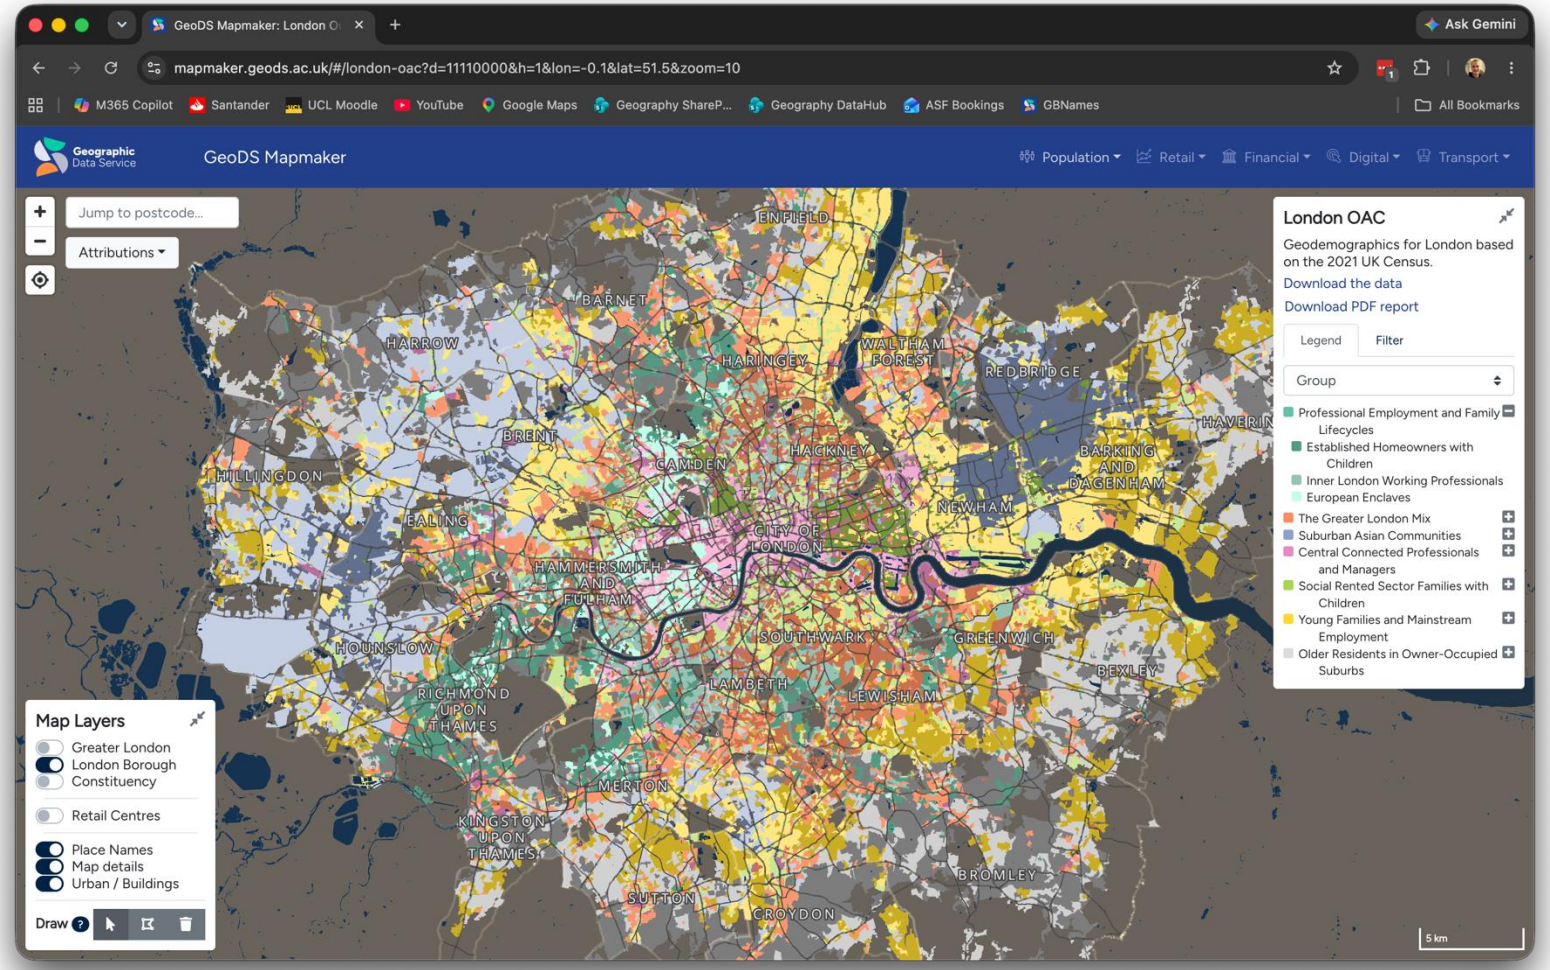

2021 London Output Area Classification on mapmaker.geods.ac.uk

Novel data sources

Traditionally, quantitative datasets in geography and the social sciences:

- Are collected for a specific purpose, following a careful study and design.
- Contain very detailed information on a particular topic.
- Are of high quality and of known provenance.

Novel data sources

Traditionally, quantitative datasets in geography and the social sciences are:

- Expensive to produce (e.g., Census, longitudinal surveys).
- Of limited spatial granularity (privacy preserving).
- Infrequently updated.

Novel data sources

- New sources of data: the digital exhaust.
- Diverse in quality and resolution.
- Arguably: higher spatial granularity, higher temporal granularity.
- Many geographical questions and applications although geographers are often not the ones providing answers.

Novel data sources



Summary

Summary


- Maps are important tools to effectively convey spatially heterogeneous information.
- At least two things are required: GIScience and GISystems.
- Essential to think about how to present your data.
- There is no one map to rule them all.
- Lots more quantitative spatial analysis out there, much of it in Geocomputation.

Module summary


What we covered

- R and descriptive statistics.
- Sampling, confidence intervals and hypothesis tests.
- Chi-square, correlation and regression.
- Spatial data, attribute joins and first maps in QGIS.
- Mapping, aggregating points to areas and more spatial analysis.

Quantitative methods

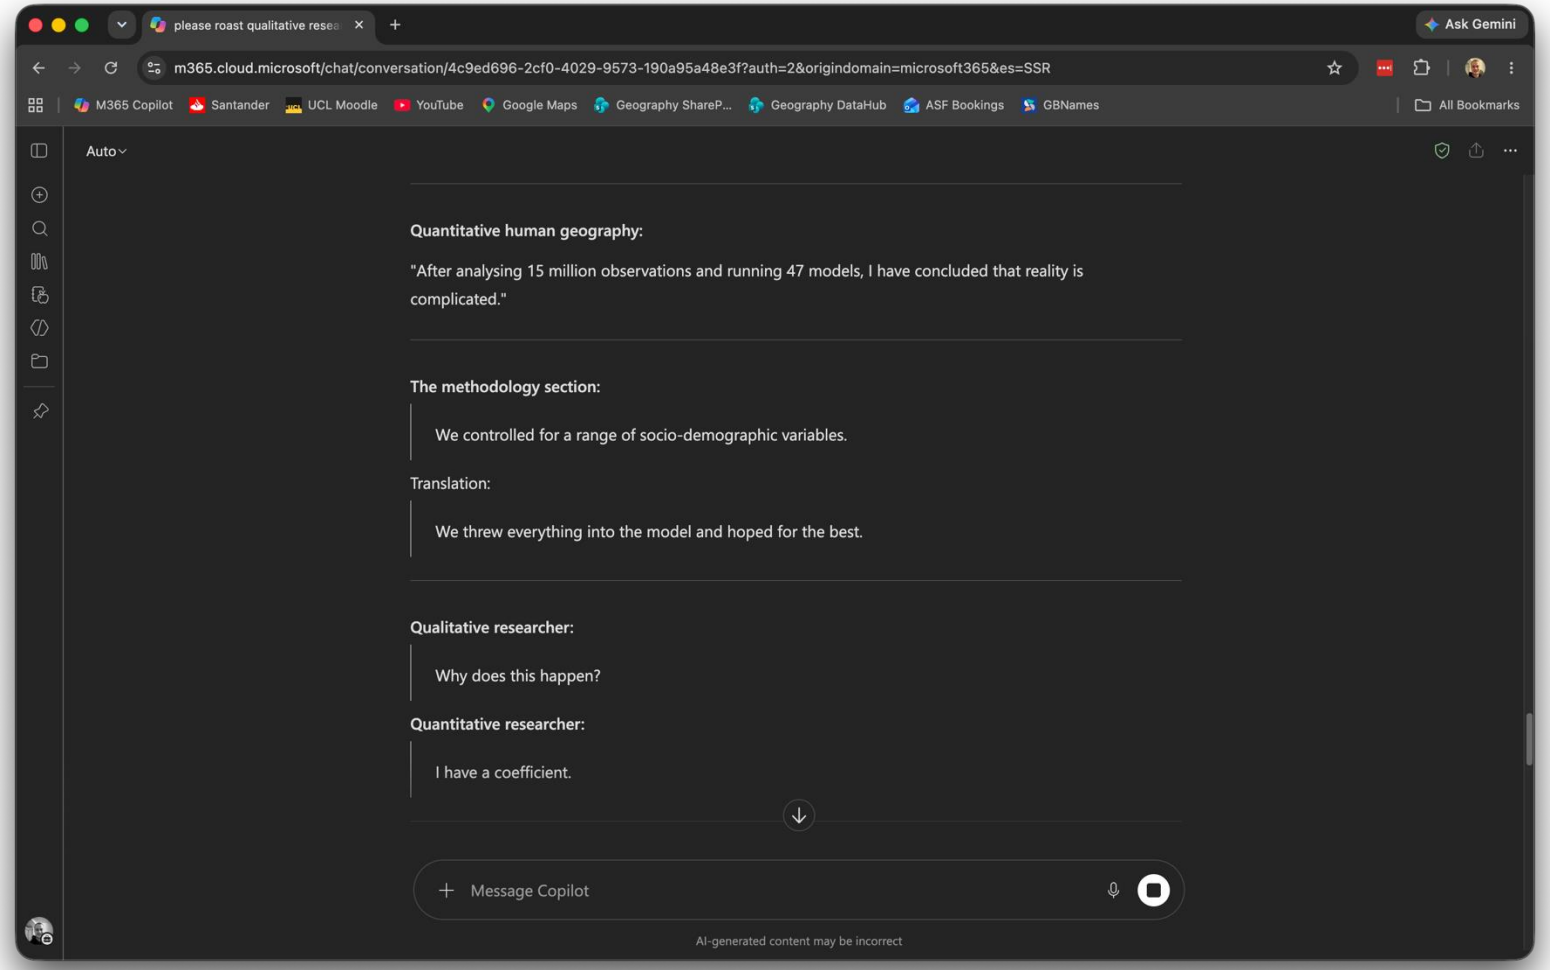

Quantitative methods

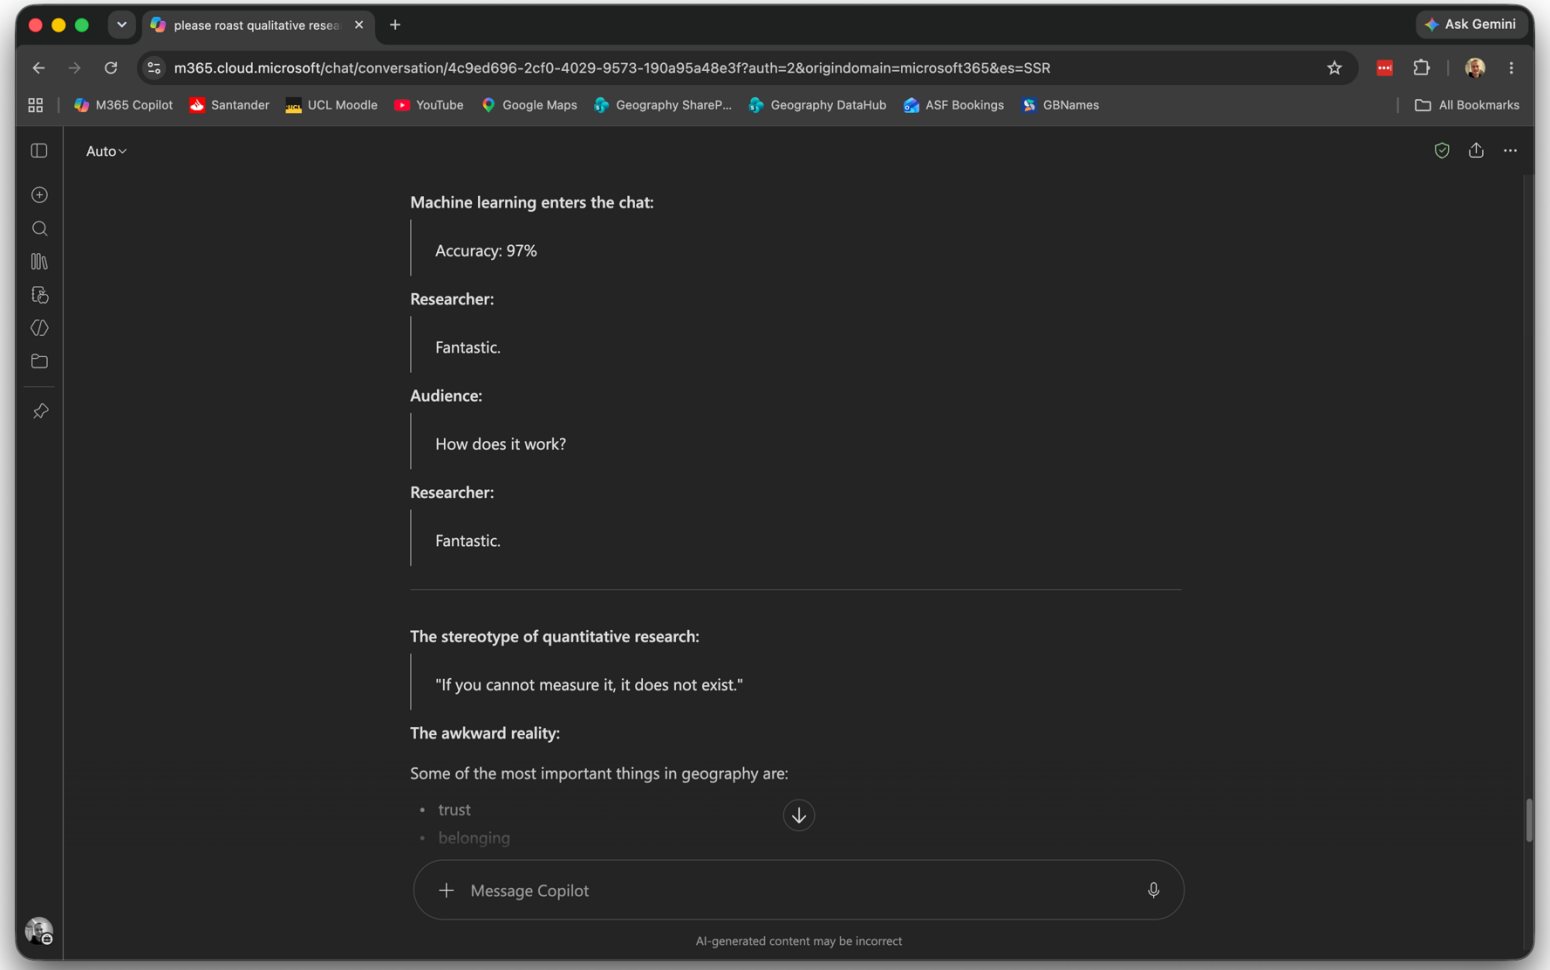

Questions

Justin van Dijk

j.t.vandijk@ucl.ac.uk





Happy winter break!