


(a) textbook hard-threshold ABC-PMC: one update per generation


P_{t+1} : the N kept, weighted;
the rejected are discarded

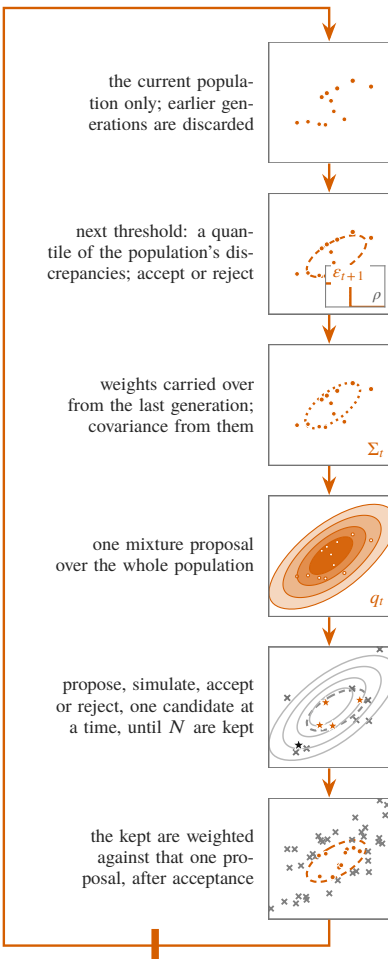

barrier: q_{t+1} needs the complete P_{t+1}

(b) generation-free (ours): one update per arrival

θ^* to a free worker; ρ^* arrives later:
append $(\theta^*, \rho^*, \epsilon_{\tau^*}, \tau^*, w^*)$, $\tau^* = n$

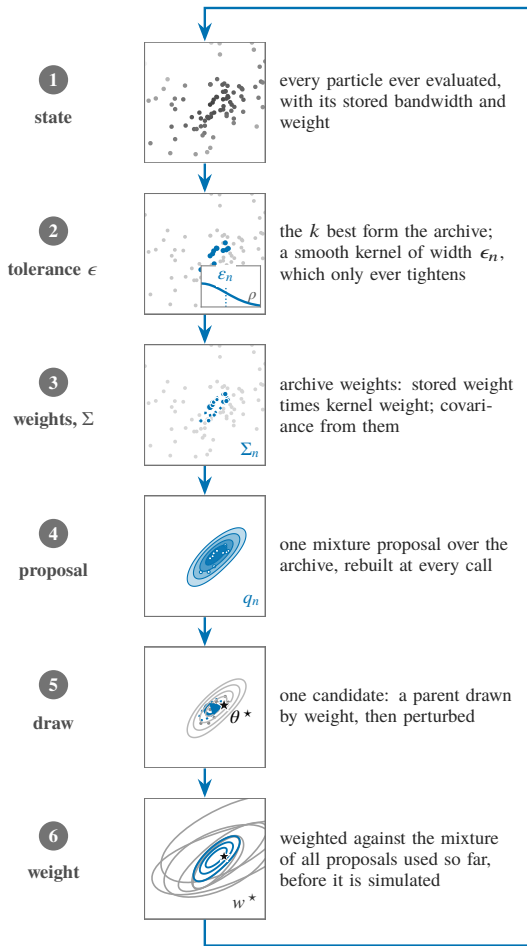

$|\mathcal{H}_n| < k$: prior draw, $w^* = 1$,
no ϵ stamp, straight to a worker