


(a) textbook hard-threshold ABC-PMC: one update per generation

P_{t+1} : the N kept, weighted;
the rejected are discarded

(b) generation-free (ours):
one update per arrival

θ^* to a free worker; ρ^* arrives later:
append $(\theta^*, \rho^*, \epsilon_{\tau^*}, \tau^*, w^*)$, $\tau^* = n$

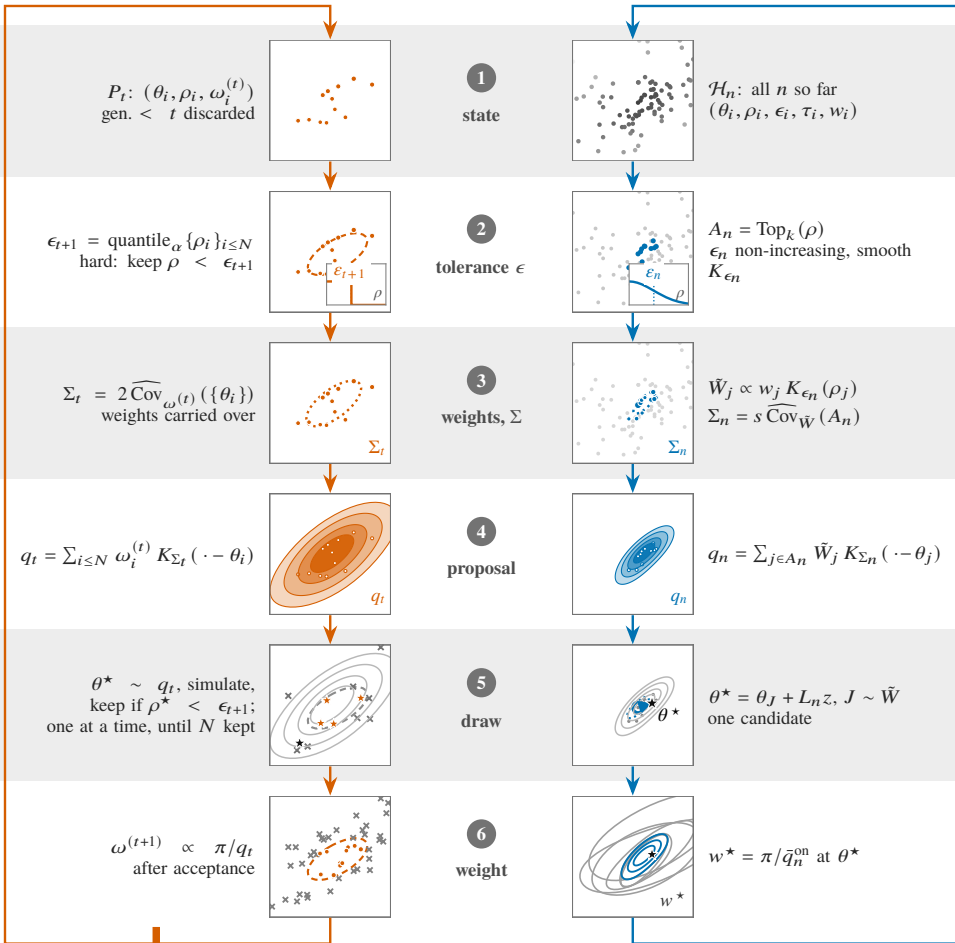

barrier: q_{t+1} needs the complete P_{t+1}

$|\mathcal{H}_n| < k$: prior draw, $w^* = 1$,
no ϵ stamp, straight to a worker