


(a) textbook hard-threshold ABC-PMC: one update per generation


P_{t+1} : the N kept, weighted; the rejected are discarded

barrier: q_{t+1} needs the complete P_{t+1}

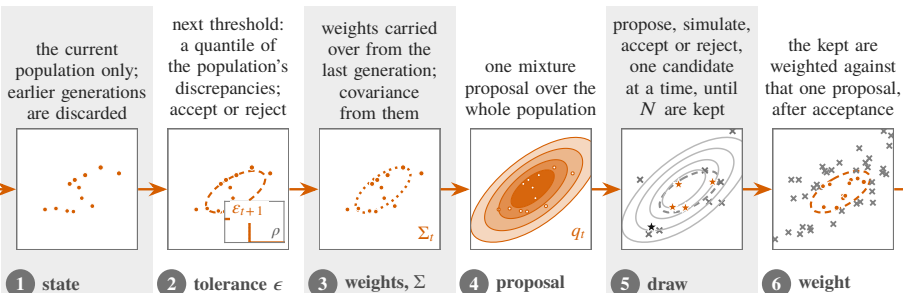

(b) generation-free (ours): one update per arrival

$|\mathcal{H}_n| < k$: prior draw, $w^* = 1$, no ϵ stamp

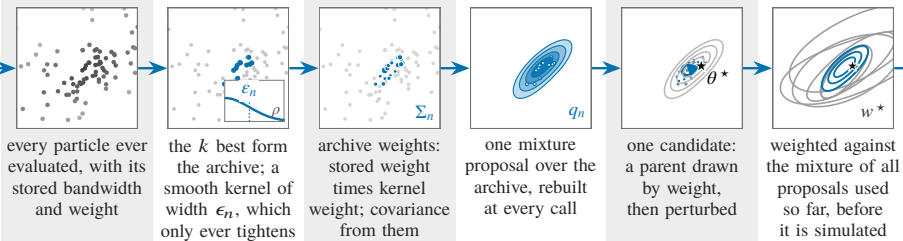

θ^* to a free worker; ρ^* arrives later, among other workers' results: append $(\theta^*, \rho^*, \epsilon_{\tau^*}, \tau^*, w^*)$, $\tau^* = n$