


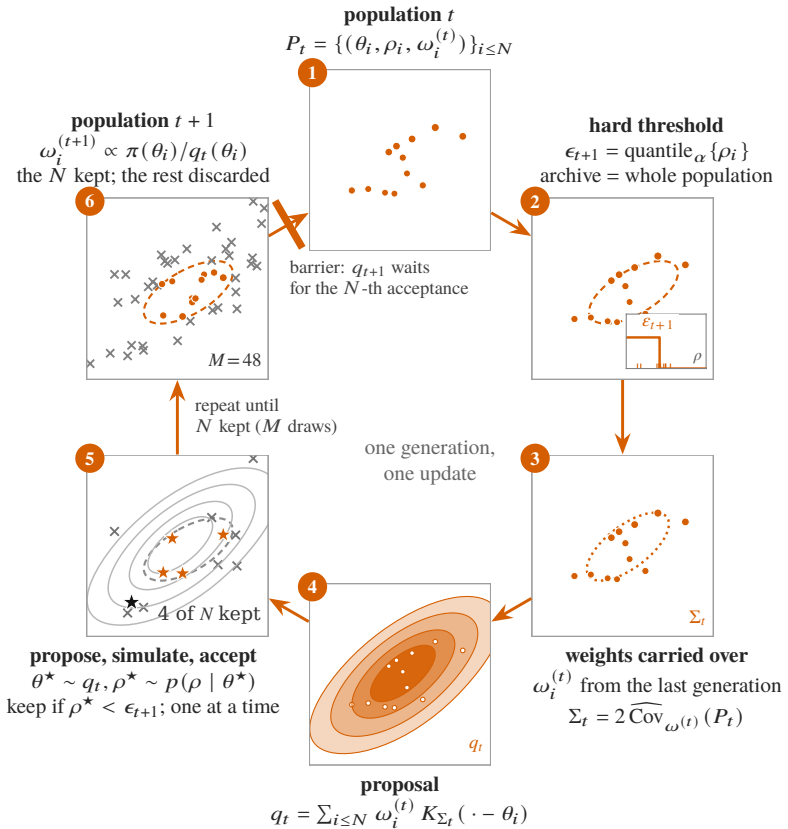

Caption stand-in. One generation of ABC-PMC with a quantile schedule (Del Moral et al. 2012; Lenormand et al. 2013; pyABC’s default) and a hard threshold (Beaumont et al. 2009), on the same 2-D toy as our ring ($N = 12$, $\alpha = 0.5$). *Not* the paper’s experimental baseline, which is pyABC with the matched smooth-kernel acceptor (§5.2, App. C). Point size = ω ; dashed ellipse = acceptance region $\rho < \epsilon_{t+1}$ (noiseless toy); inset in (2): the indicator $\mathbf{1}[\rho < \epsilon_{t+1}]$ over ρ , ticks = ρ_i of P_t ; crosses = rejected, discarded.

(5) the loop in progress after the first 12 candidates (kept: filled; the black star is being simulated). (6) after all $M = 48$: the N kept form P_{t+1} , weighted against the one proposal q_t and normalized. The generation dependency: q_{t+1} needs the complete, weighted P_{t+1} , so the next proposal waits for the N -th acceptance (bar). pyABC instead closes a generation on the first N finishers and discards late-comers.