NomNom Go

G8T6 Lor Mee



Overall Business Scenario




Food Delivery App where users order their food through the app and delivery riders complete the orders

Scenario 1




Customer places an order → payment fails due to insufficient wallet balance → Customer tops up → Order Placed → Order assigned to a driver


Step 1: User places and tries to pay for order

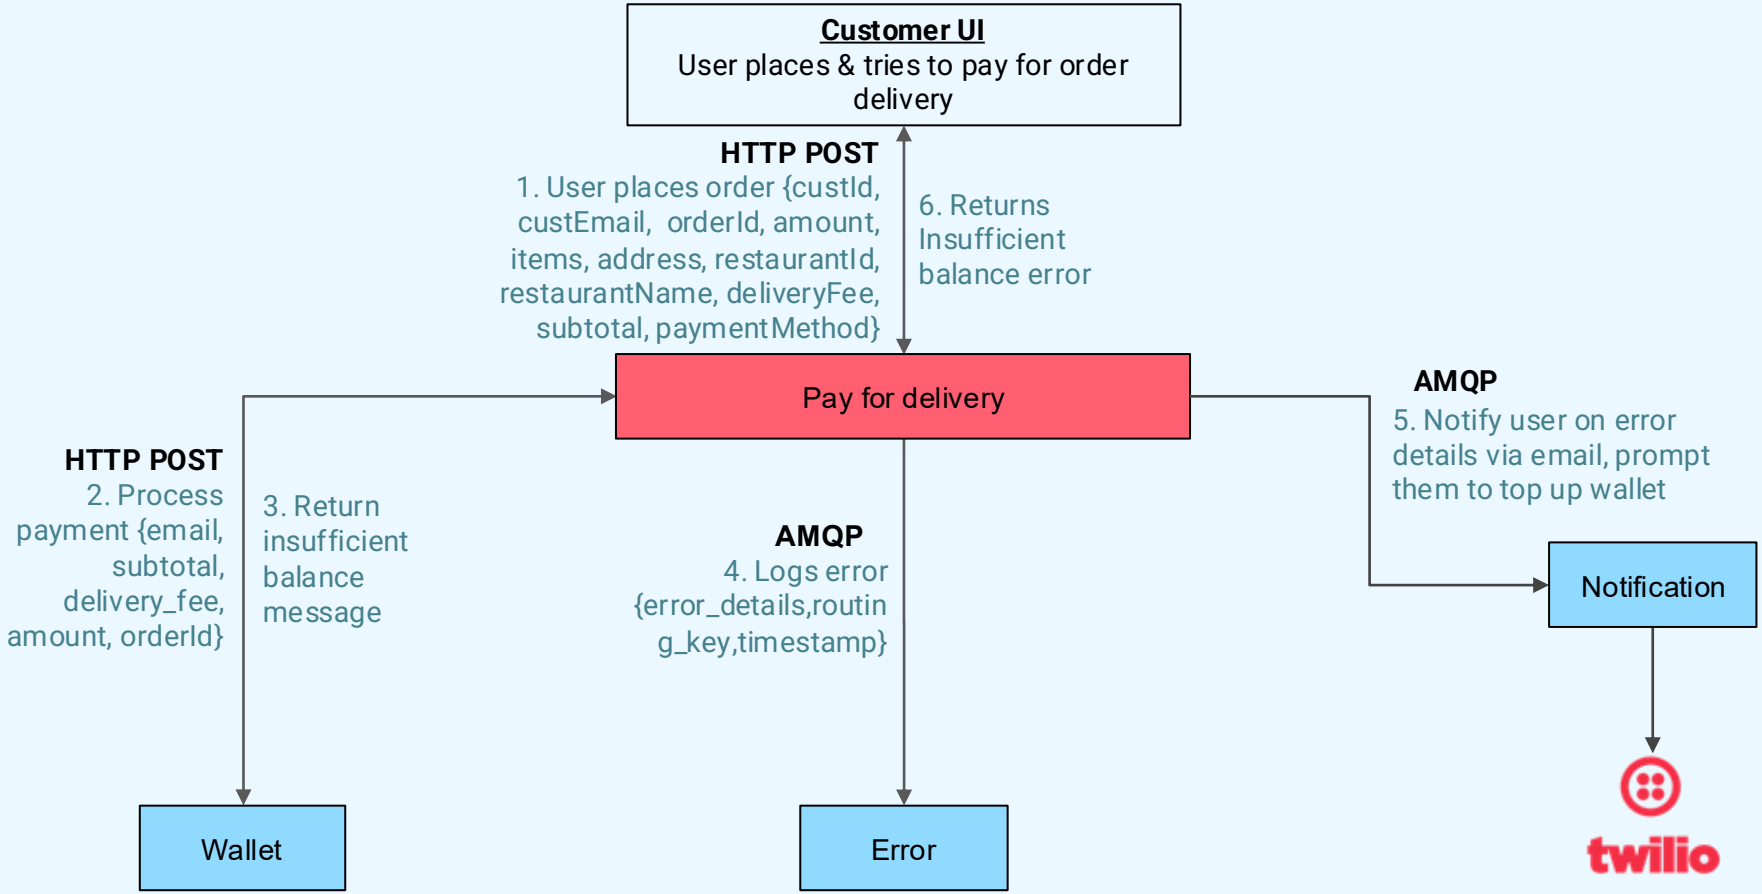


Step 2: User tops up wallet and successfully pays for order

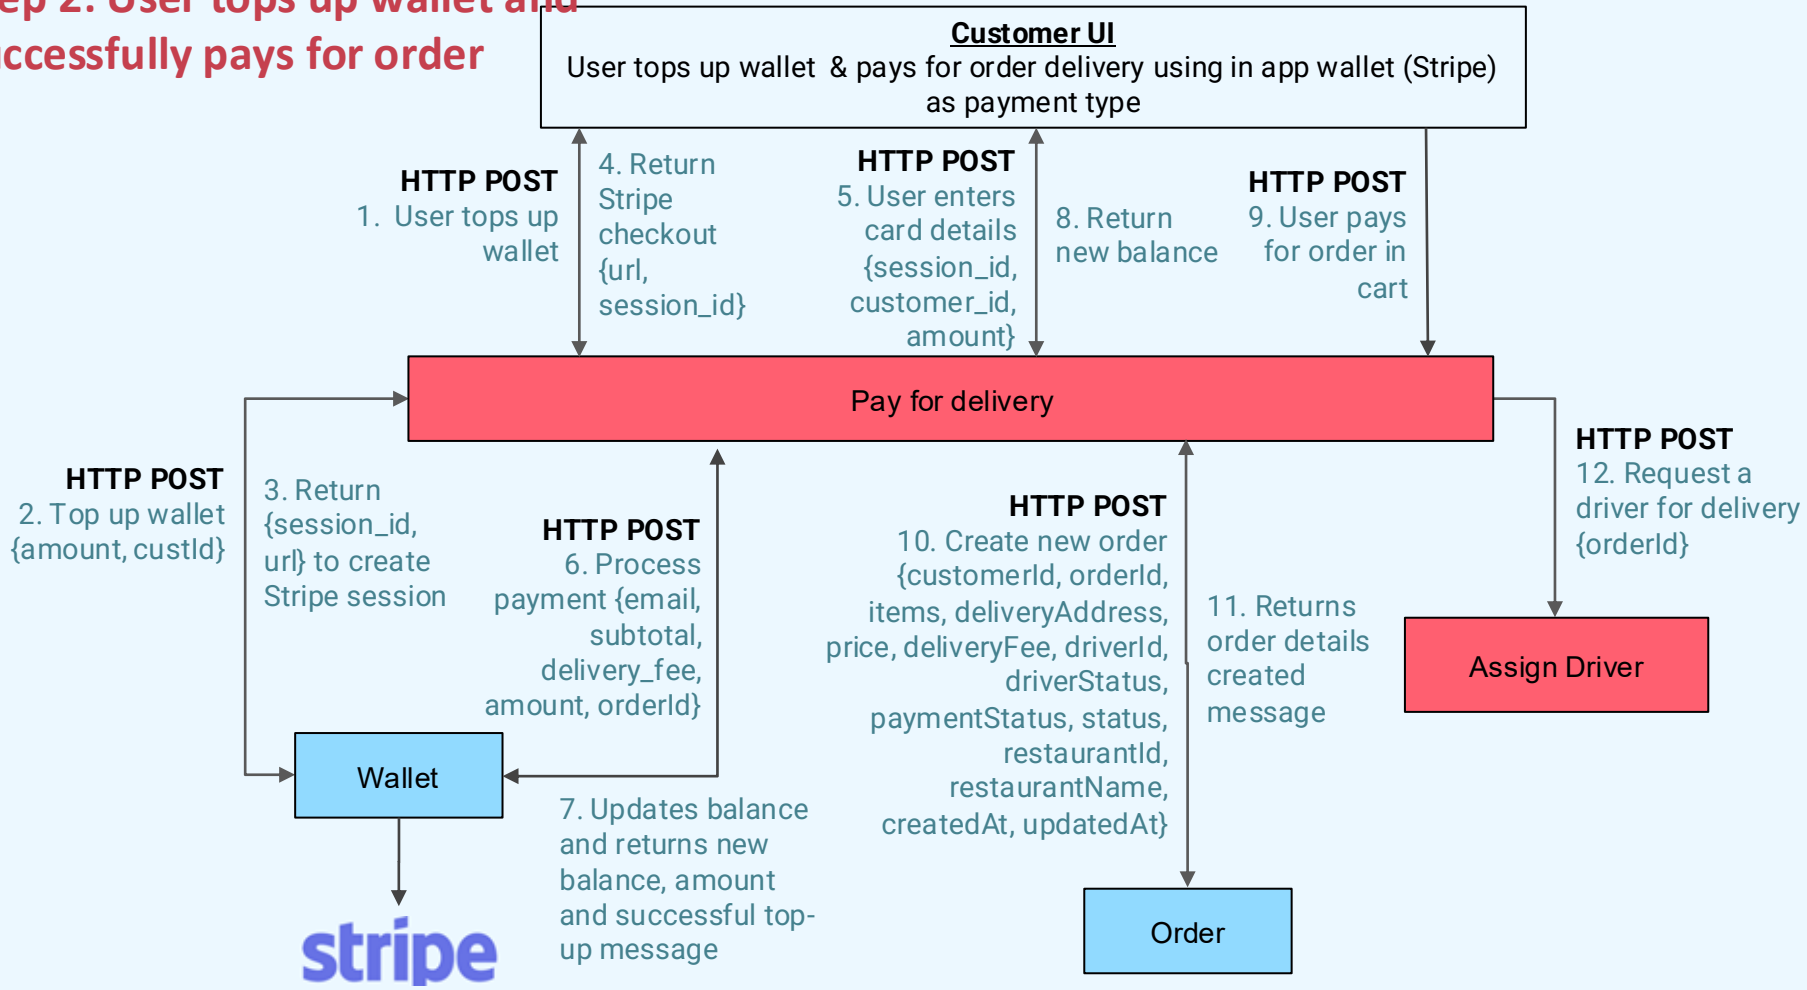

Step 3: Driver is auto-assigned

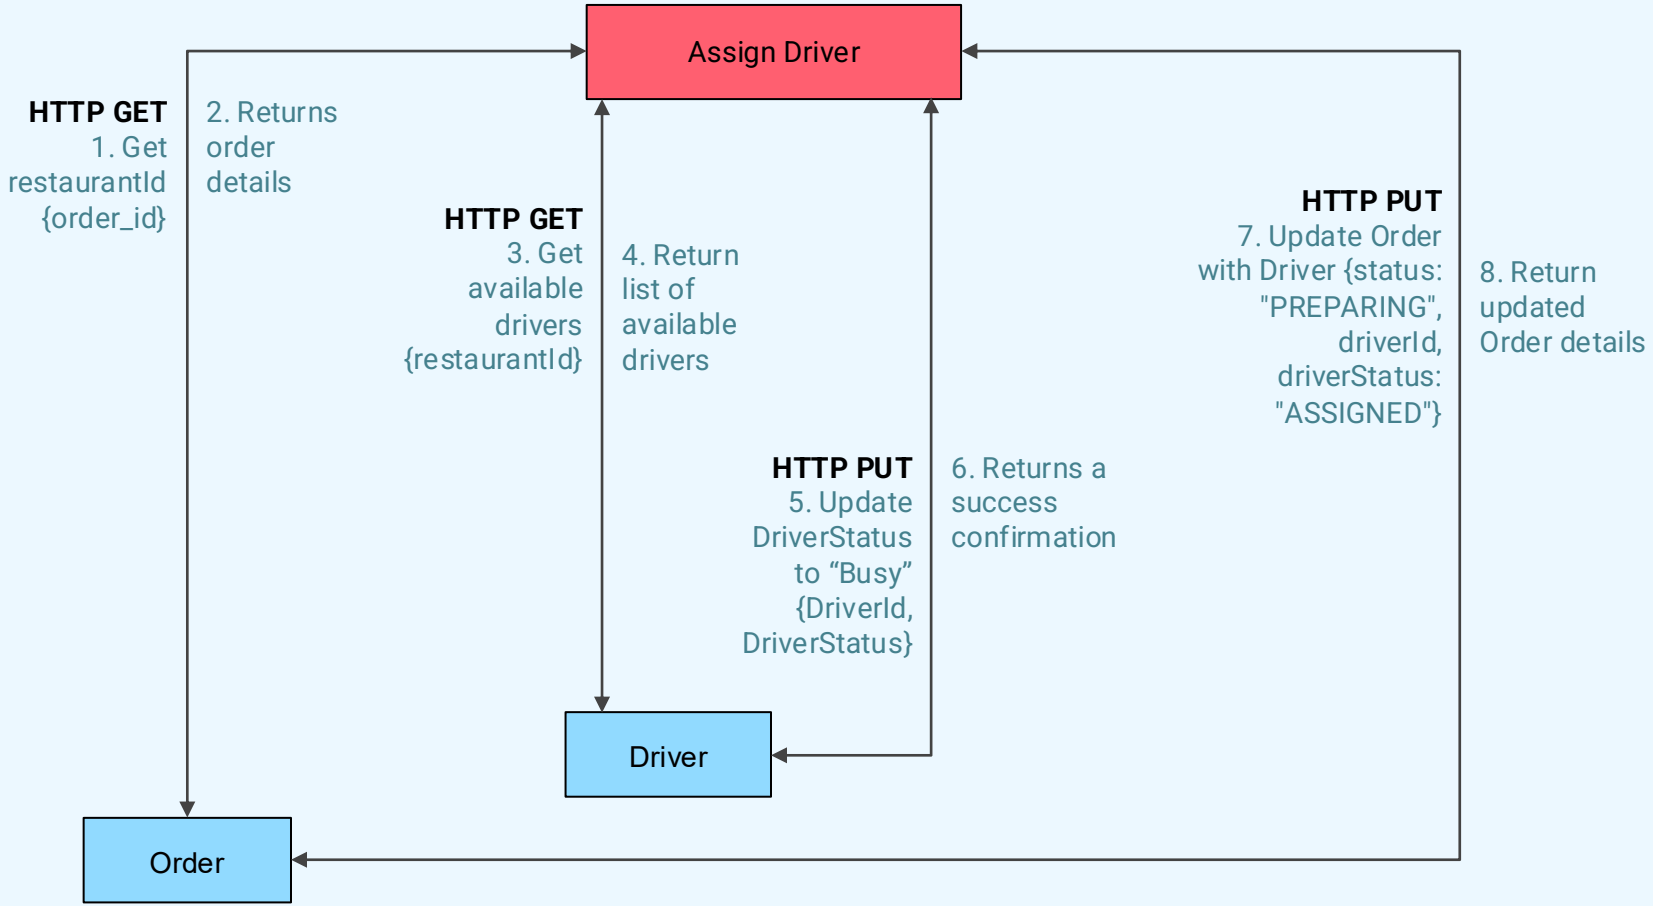

Step 4: Customer is notified of order placement and driver assignment

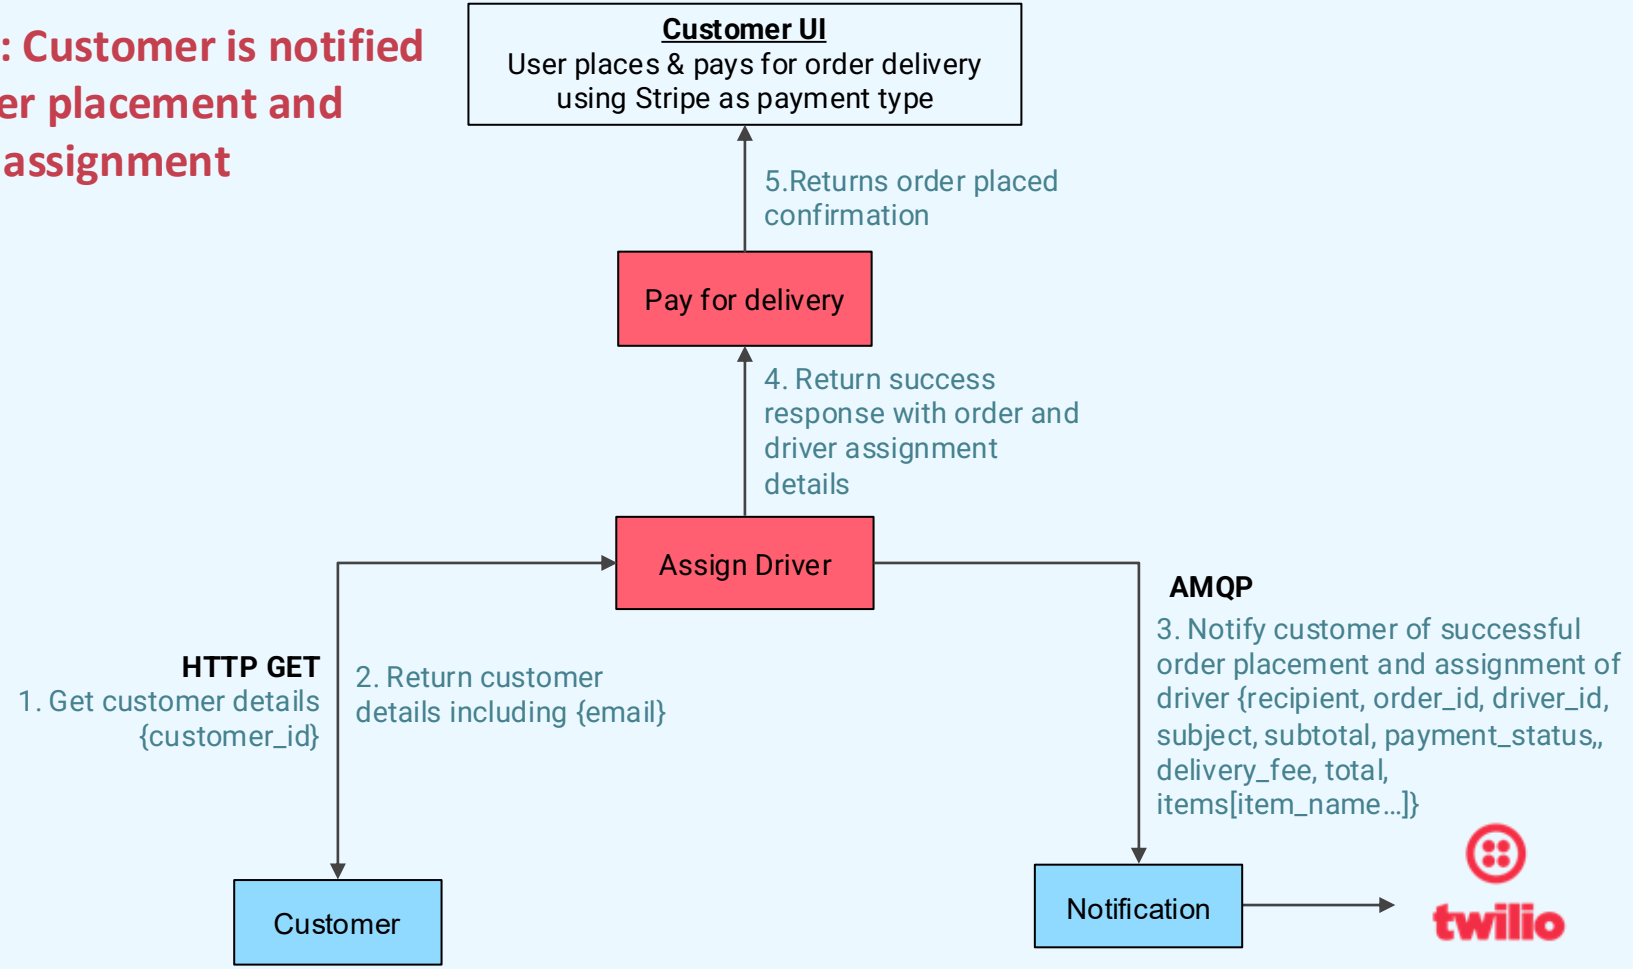


Scenario 2




Order is assigned to a driver → driver rejects the order offer
→ Order needs to be reassigned to the next nearest driver

Step 1: Driver rejects delivery request and new driver is assigned

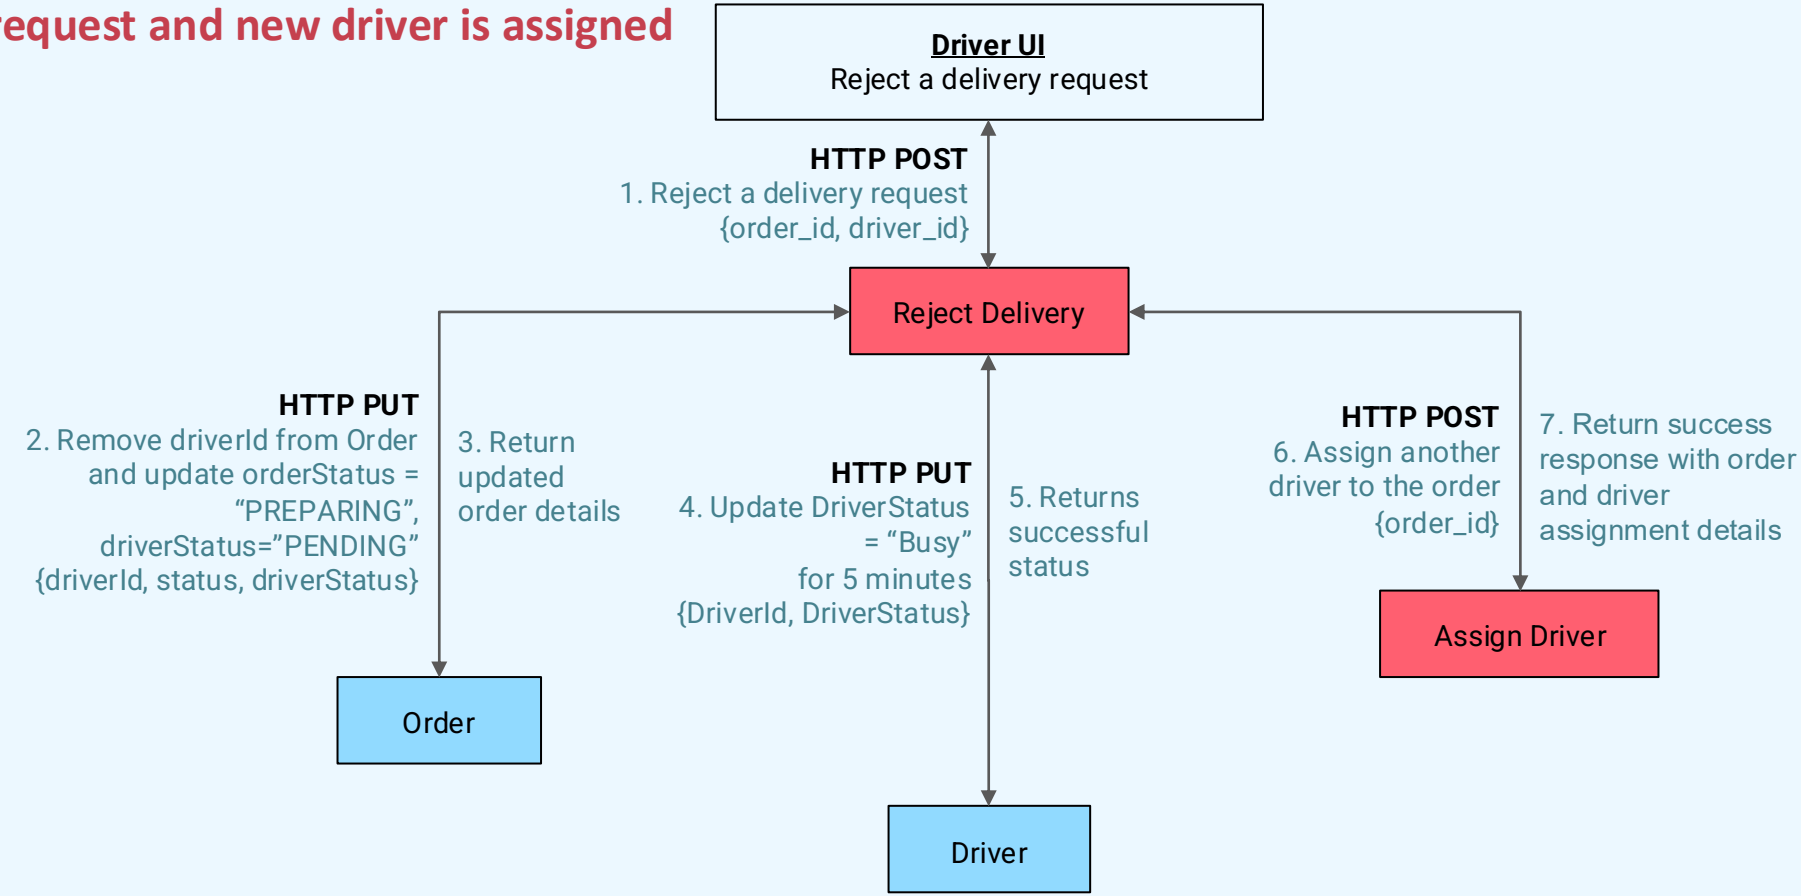

Step 2: Driver receives confirmation of delivery rejection and customer is notified of new driver placement

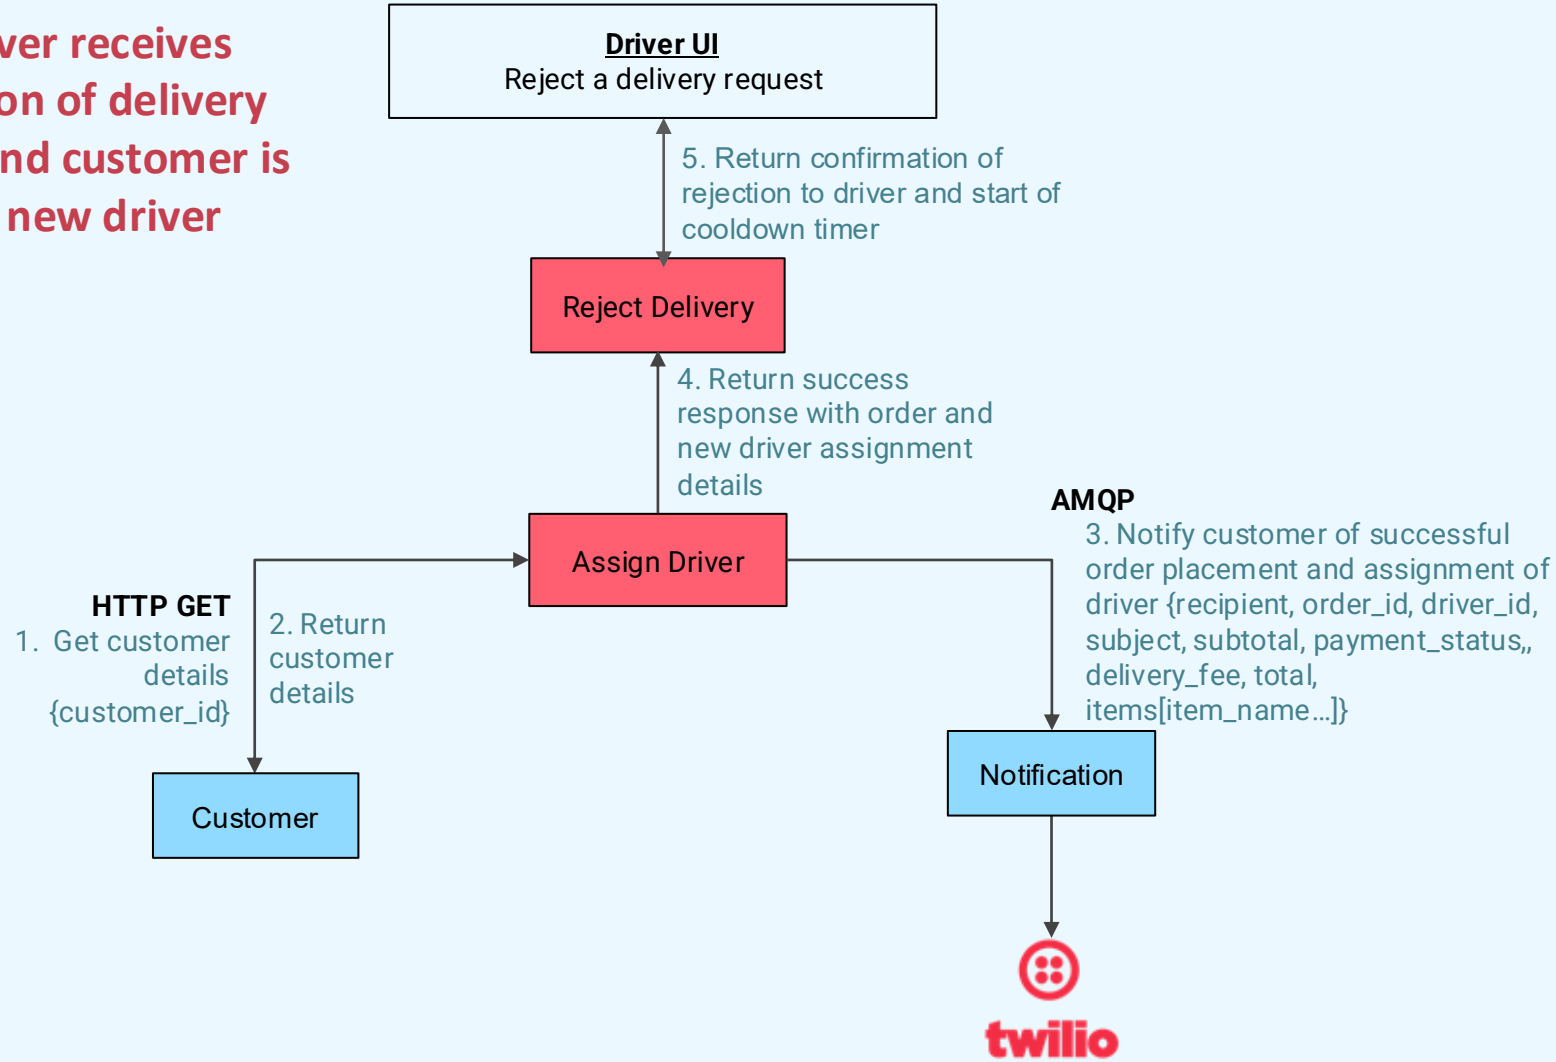


Scenario 3



Driver cancels order and order is refunded to customer

Step 1: Driver cancels the delivery and order needs to be refunded to customer

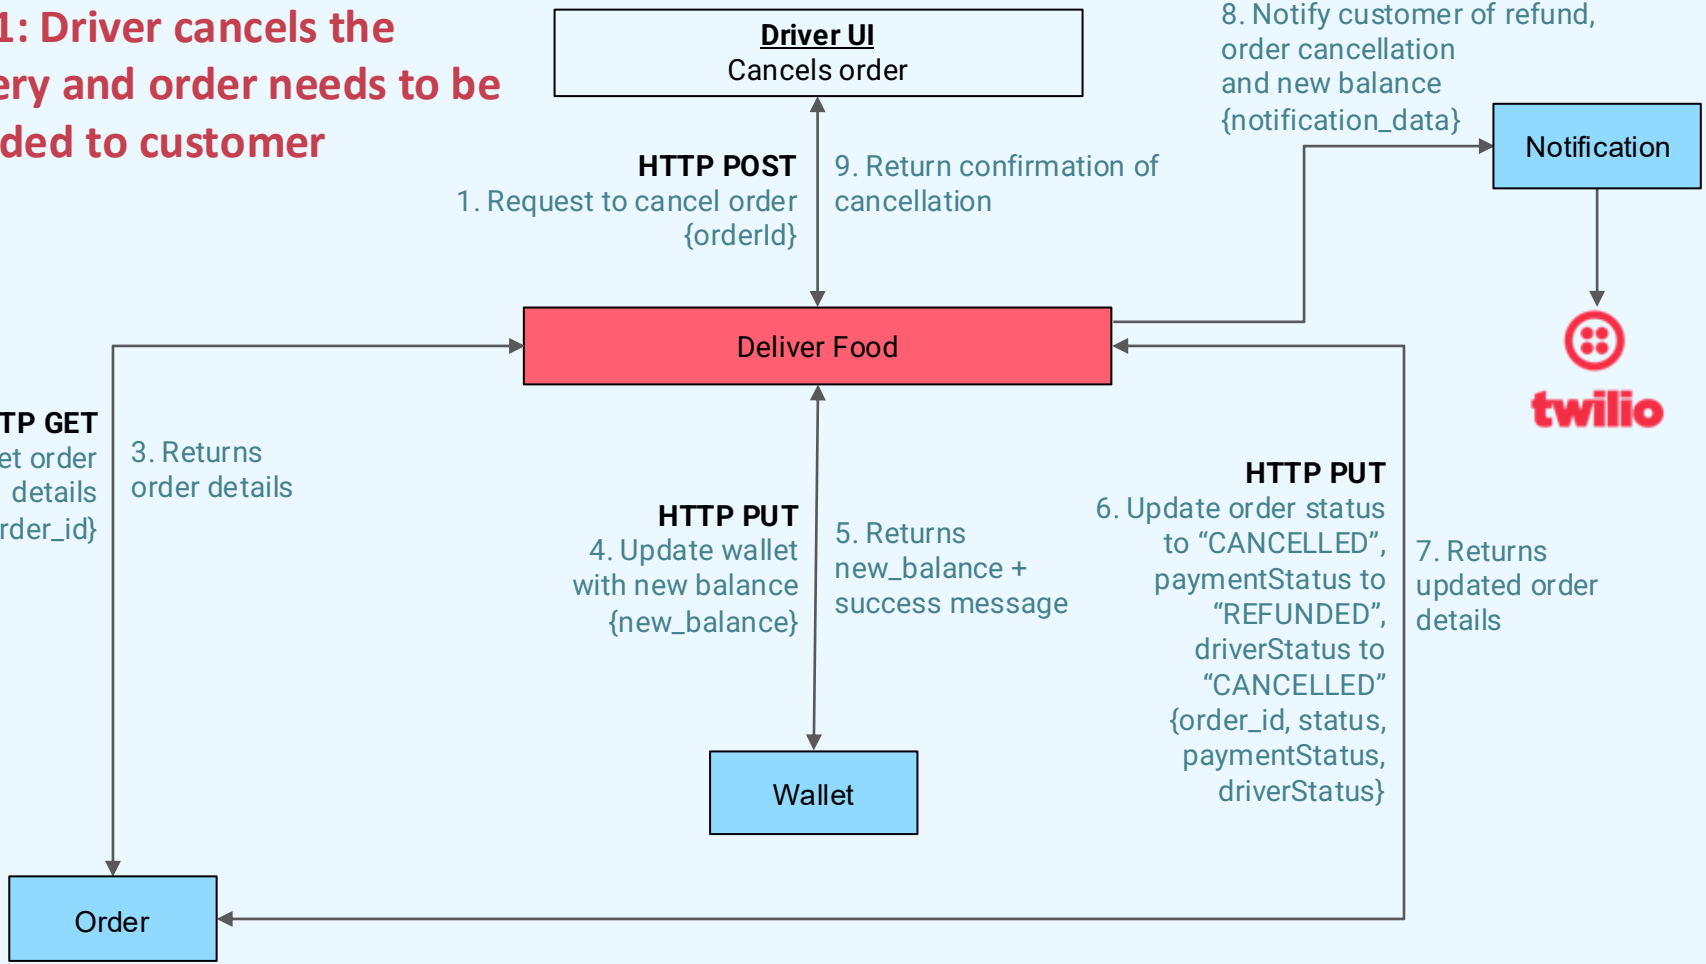





Beyond The Lab

Kong





Beyond The Lab




API Gateway using Kong

- **Before implementing Kong:**
  - Individually defined URLs and port numbers for each service
  - Needed to manage different URLs and port numbers for different functionalities which lead to many errors

- **After implementing Kong:**
  - Standardised routing to a single entry point (localhost:8000)
  - Differentiated services using URL paths, eliminating the need for multiple port numbers.
  - Decoupled services, allowing easy implementation of different functions

Live Demo

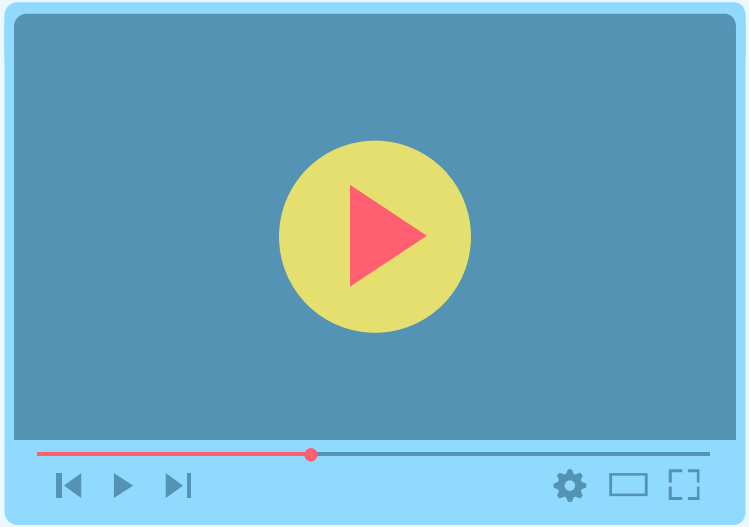

https://youtu.be/JcsmFzwhh3M



Thanks!