

# Cross-validation for TS with the library *fable*

Juan Garbayo

Forecasting & Time Series Analysis


# CLARIFICATION: DATASET FOR CV

```
{r}
dataset_cv <-
  stretch_tsibble(dataset, .init= INIT, .step = STEP)

fit_cv <-
  dataset_cv %>%
  model(
    model_1 = ... ,
    model_2 = ...
  )
```

DATASET

DATASET FOR CV

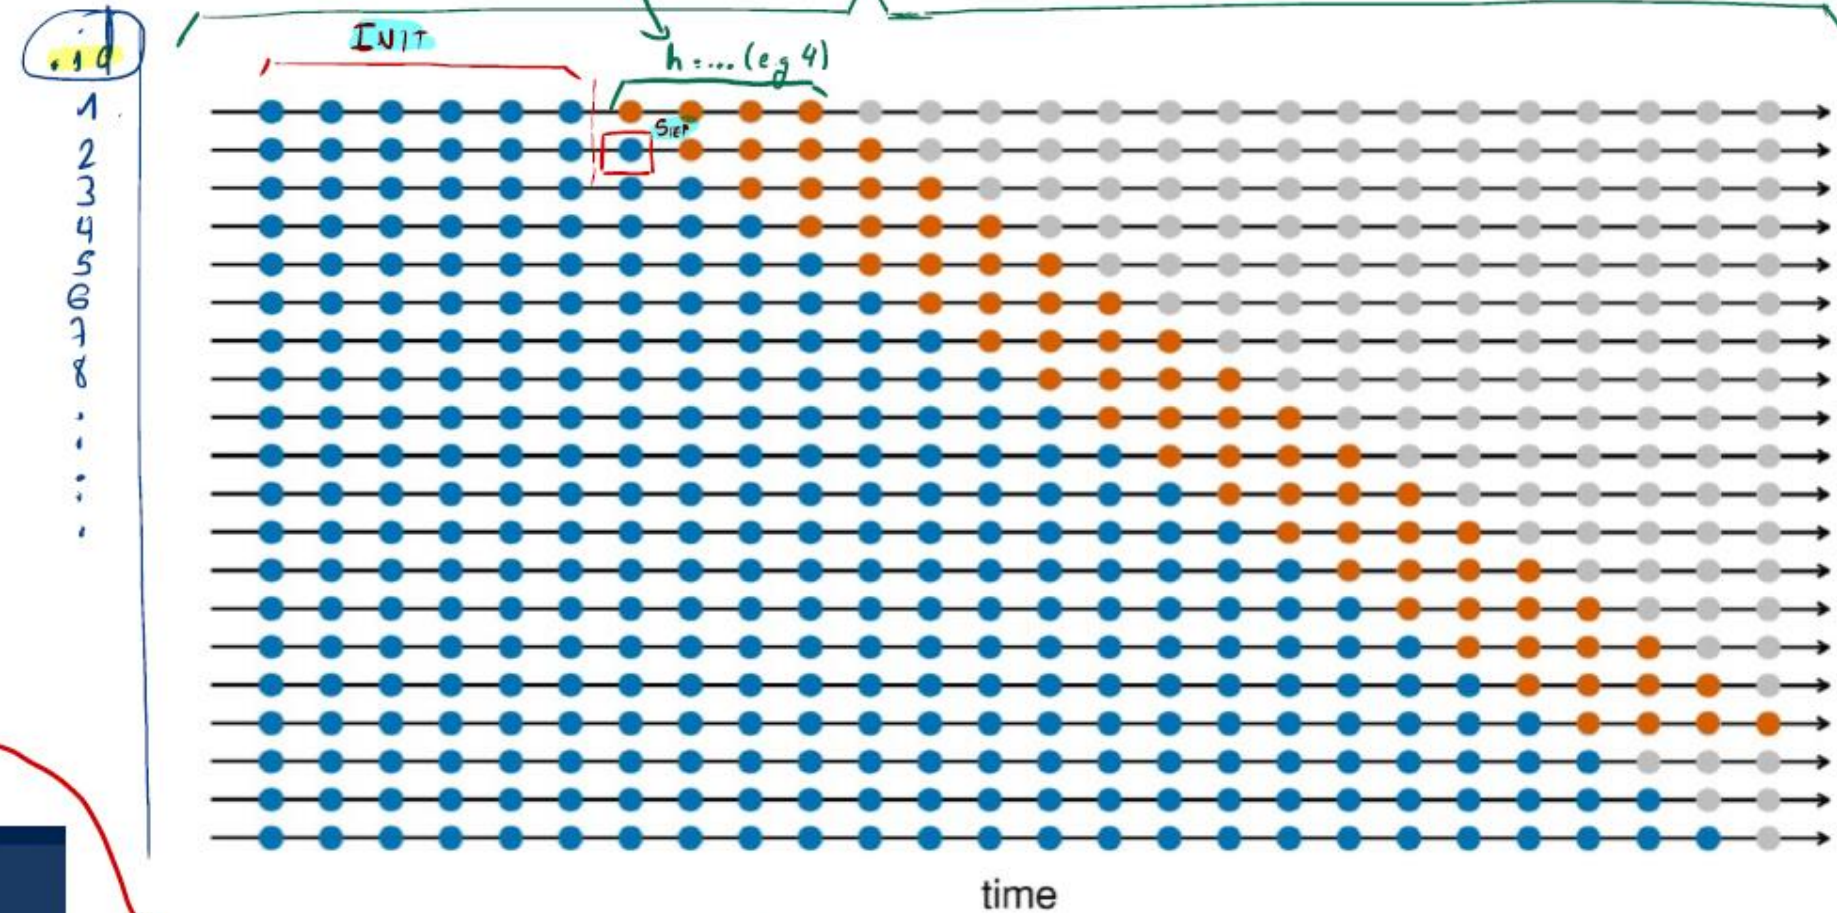

```
{r}
fc_cv <- fit_cv %>% forecast(h=...)

accuracy_cv <-
  fc_cv %>%
  accuracy(dataset) %>%
  ...
```

The original dataset!!

↳ Contains the entire range of values.

