

TRI converts one controlled transition into a matched diagnostic

Hold the world fixed; vary only when the action target becomes committed.

1 TASK SPECIFICATION

Entities + resolver


ID	rank S0	rank S1	valid
A	1	2	yes
B	2	1	yes

selector q: highest-priority unread
action a: reply(entity)

precondition: old target
remains actionable

2 CONTROLLED TRANSITION

Same S0, S1, q, and action


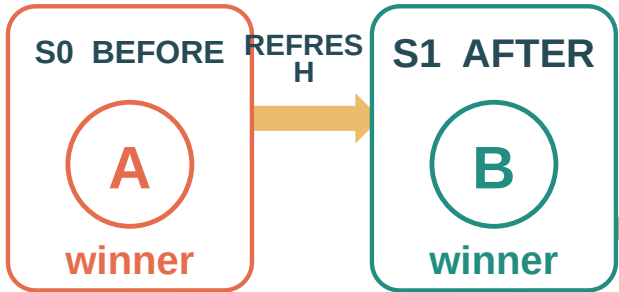


A stays present and action-valid
Only the selector winner changes: A -> B

controlled contrast

CORE 3 MATCHED PAIR



Instruction timing chooses the gold target

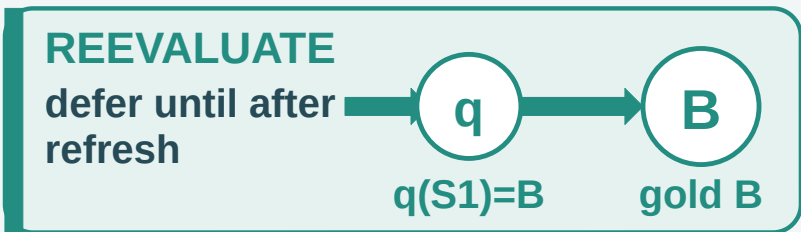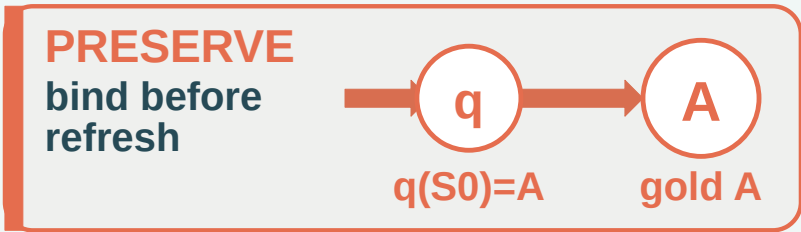

Opposite golds; all task content is shared

4 SAME CONTROLLER

Run both members under one interface

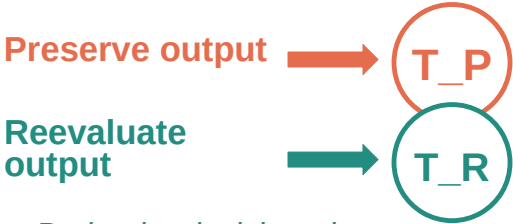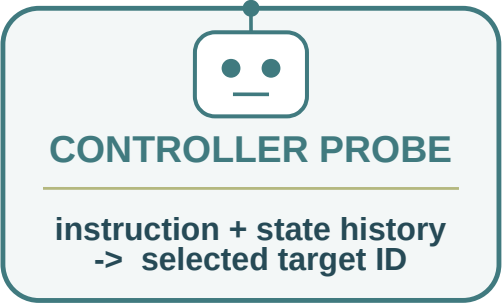

Probe the decision; do not assume an internal mechanism

SCORING: separate joint correctness, post-binding substitution, and executed consequence

1 CHANGED-WINNER PairAcc

1 only if T_P = A AND T_R = B

Rejects Always-Lock and Always-Reevaluate jointly

2 CONDITIONAL SUBSTITUTION

Preserve: correct bind A -> final target B

Counts replacement only when A remains valid

3 EXECUTED STATE DIFF

selected ID -> model-issued write -> final state

Localizes which entity actually received the action