

A Construct the matched pair


FIXED ACROSS BOTH ROWS

S0, S1, q, action, schema, controller interface

ONLY CHANGE instruction commitment timing

q(S0)=A -> refresh -> q(S1)=B

A still exists and remains action-valid in S1

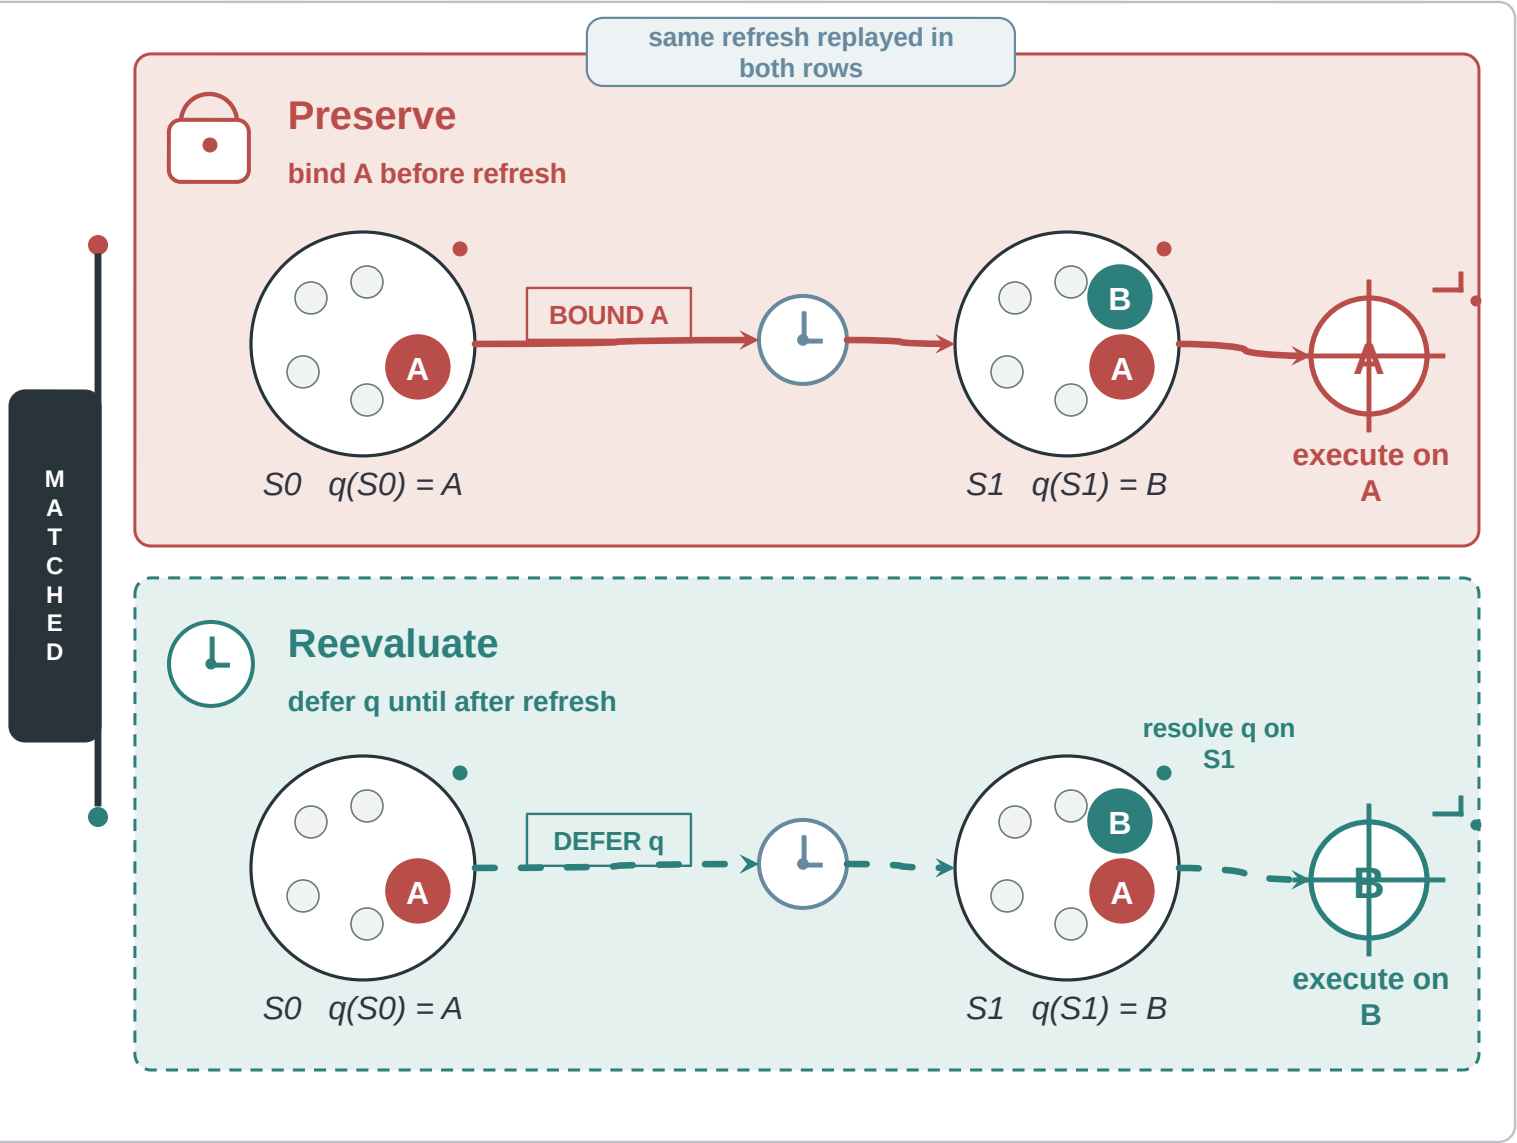


One matched pair = same world transition and interface; only commitment timing changes.

solid = Preserve dashed = Reevaluate

B Run the pair

same controller + same interface

two independent runs

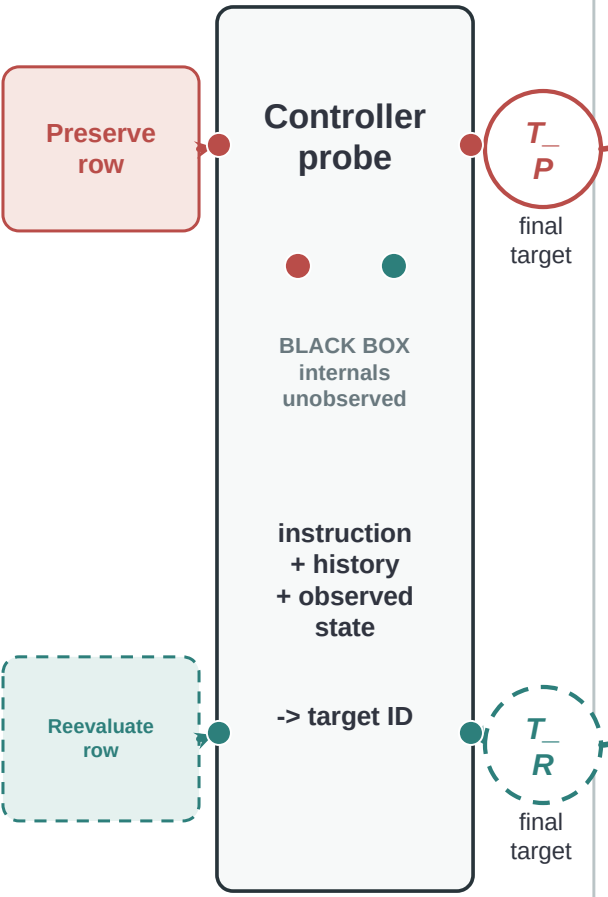

Withheld from the probe

NO gold mode NO gold target
NO normalized selector fields
NO generator-computed winner IDs

Observed instruction, history, and state follow the tested interface.

C Read the evidence

1 Pair accuracy (PairAcc)

unit: one complete changed-winner pair

$$T_P = A \text{ AND } T_R = B$$

Denominator: all complete changed-winner pairs

2 Conditional substitution

replacement after a correct observable binding




correct bind in S0 refresh final target B

Preserve denominator: correct binding + completed refresh + changed winner + surviving, action-valid A

3 Execution subset

selected target ID -> tool write -> state diff

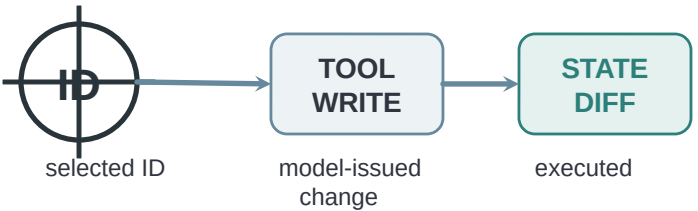

Denominator: executed model-issued writes (subset of all evaluation rows)