


A Construct the matched pair

FIXED S0, S1, q, action, schema, controller interface

ONLY CHANGE commitment timing

$q(S0)=A \rightarrow \text{refresh} \rightarrow q(S1)=B$


A remains present and action-valid in S1

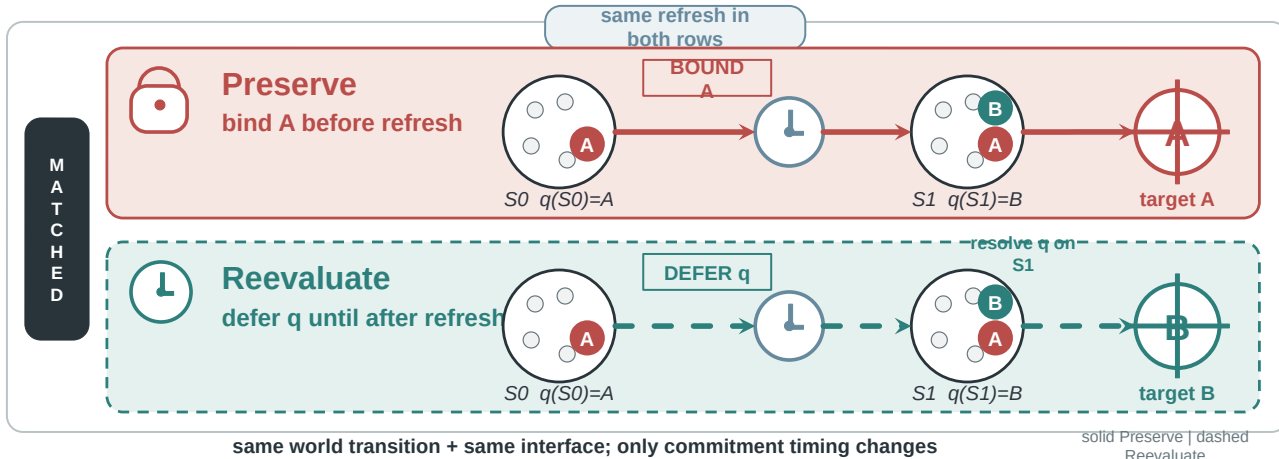

B Run the pair

same controller + same interface

two independent runs

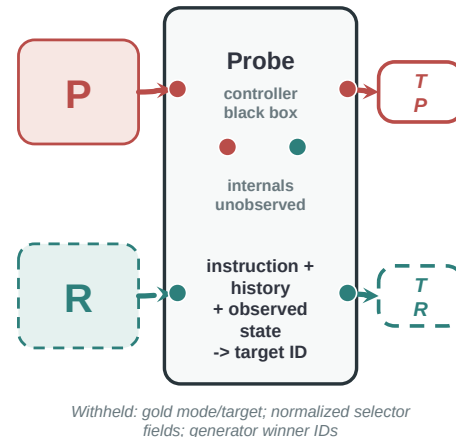

C Observable readouts

1 **PairAcc**

$T_P=A \text{ AND } T_R=B$

all complete changed-winner pairs

2

Conditional substitution



Preserve: correct binding + completed refresh + changed winner
+ surviving, action-valid A

3

Execution subset

