


A Shared changed-winner transition

S_0 (before refresh)

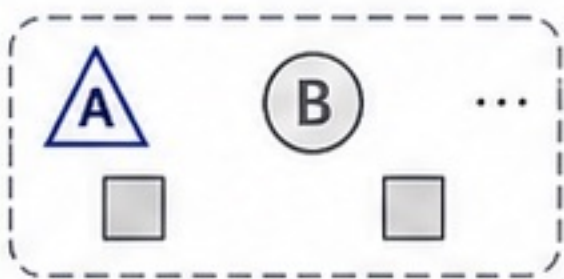


$q(S_0) = A$

A wins in S_0

refresh

S_1 (after refresh)

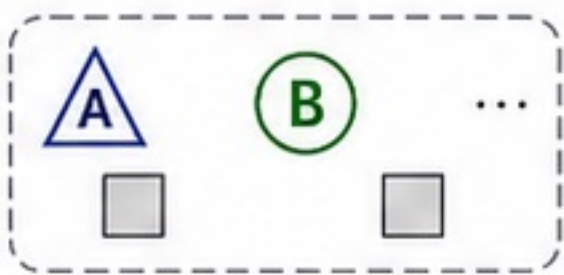

$q(S_1) = B$

B wins in S_1

- A remains present in S_1
- A is action-valid in S_1

B Matched diagnostic (one pair)

FIXED: S_0, S_1, q , action, schema, controller interface

Only commitment timing changes


P Preserve

bind A pre-refresh

gold A


S_0

S_1

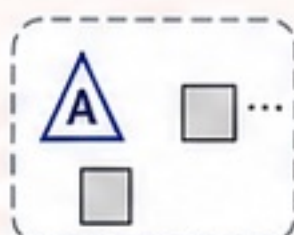

bind A

refresh

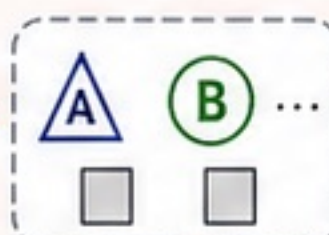

Action on bound A in S_1 (action-valid)

R Reevaluate

resolve q post-refresh

gold B

S_0

S_1



defer q (no bind)

refresh



resolve q

Action on resolved B in S_1 (action-valid)

C Same probe

One opaque probe/controller
same interface, same inputs

From Preserve (P)

same controller interface
same inputs

Probe



opaque controller

T_P

From Reevaluate (R)

same controller interface
same inputs

T_R

Gold mode / target withheld

D Observable endpoints




PairAcc

$P \rightarrow A$ AND $R \rightarrow B$
(joint correctness across the pair)



Conditional substitution

A bound $\rightarrow$ refresh $\rightarrow$ B final

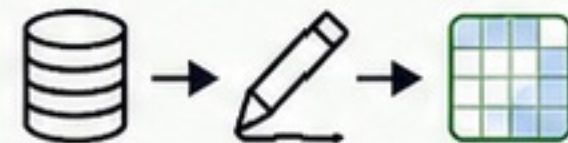

Execution subset

ID $\rightarrow$ write $\rightarrow$ state diff



Item A



Item B



Other items



Selector

Timeline



Preserve (bind A)



Reevaluate (resolve B)



Gold target