


minimap2 AS vs gap-aware HMM logL on 4 real multi-mapping FLNC reads (GGO.bam, GOLGA8I)

Each panel = one full-length read. Each copy has ONE score per method. Scores normalised to [0,1] per read so both methods are visible on one axis.

Labels above bars mark each method's primary pick (the copy with the highest score).

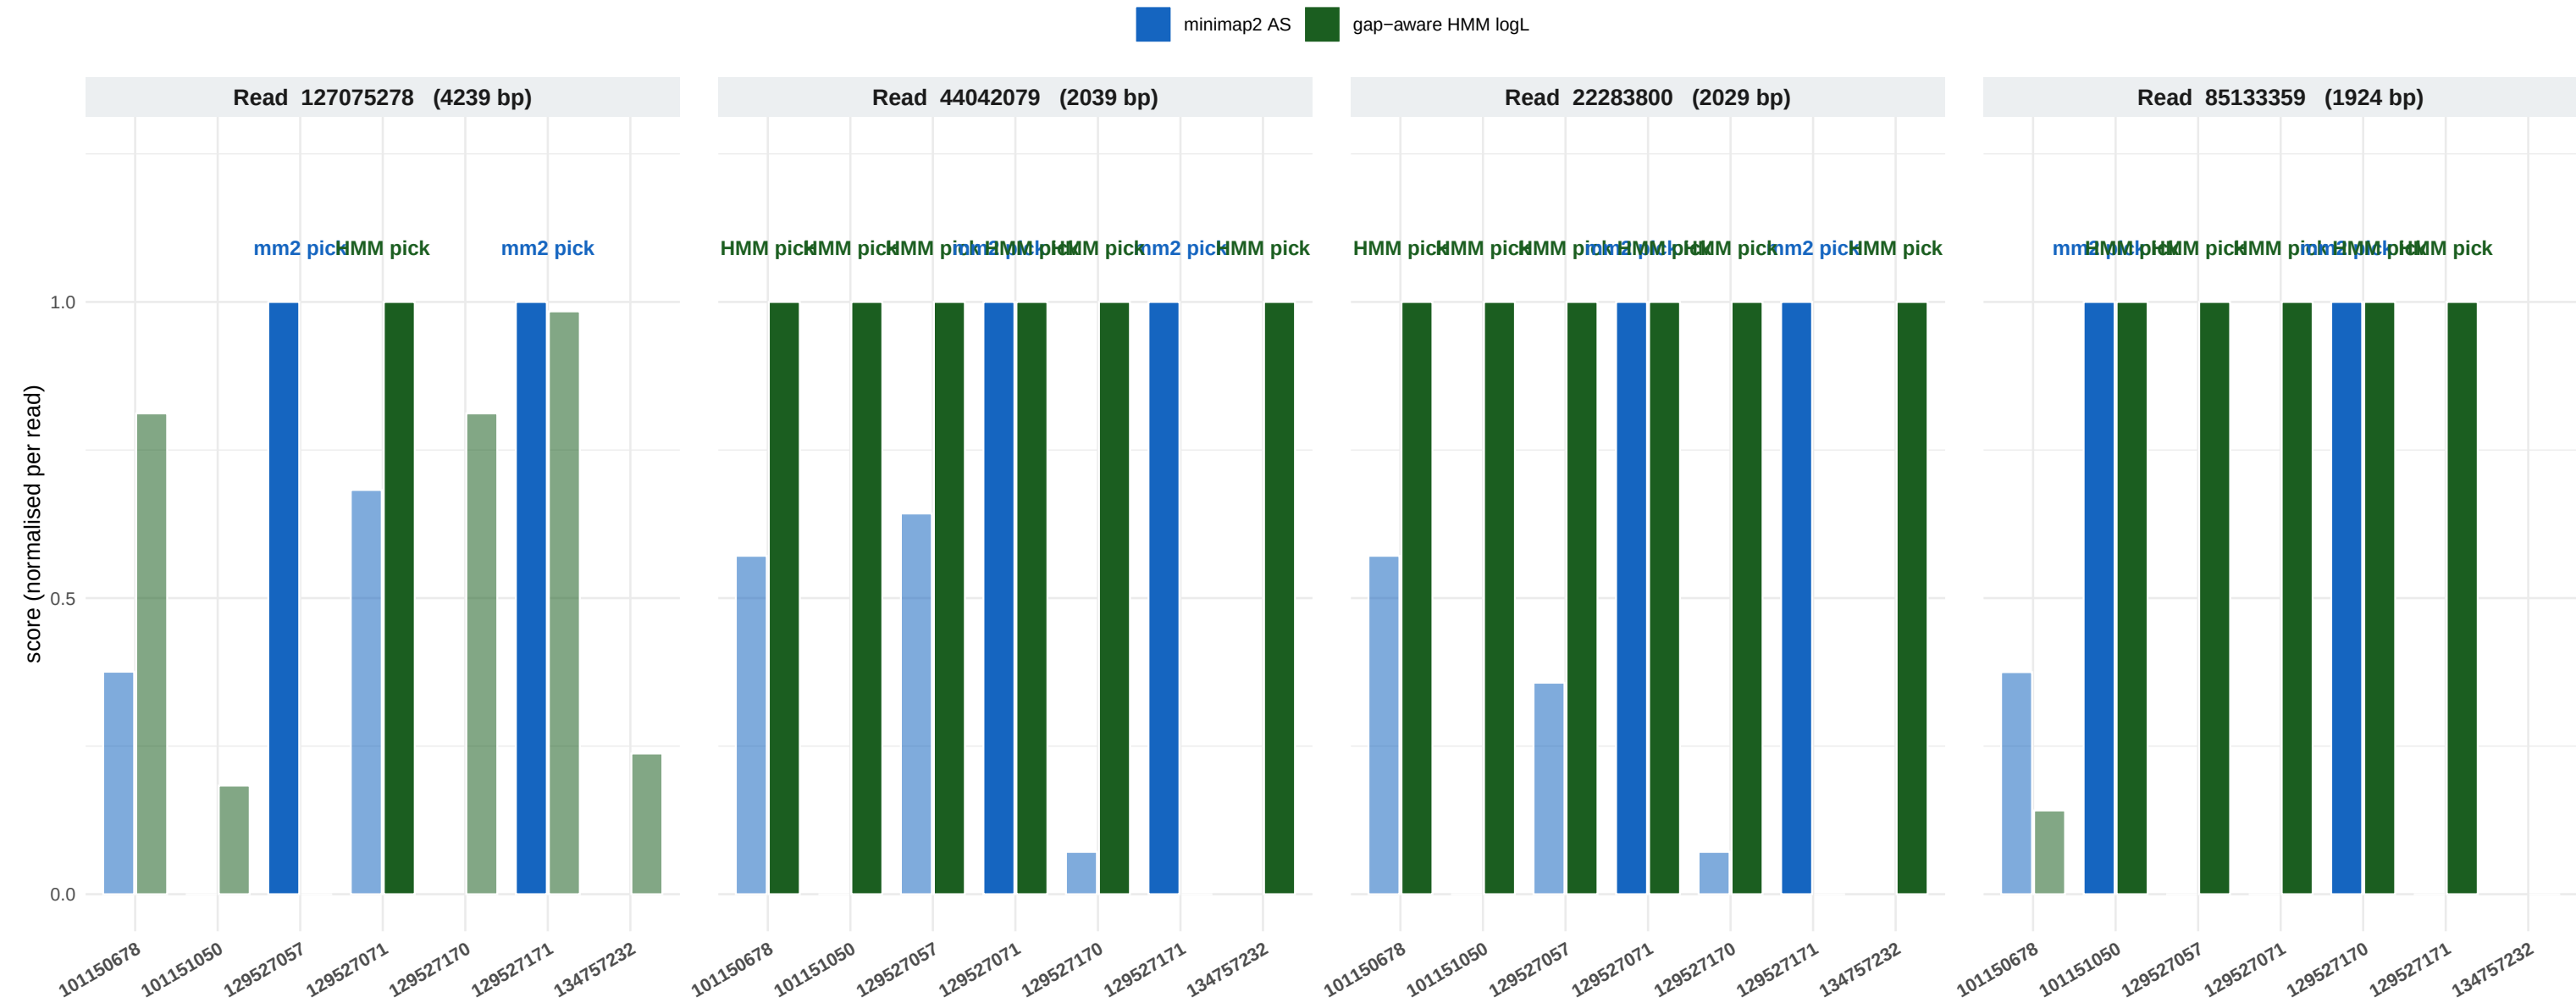

read	length	minimap2 primary	HMM primary	
22283800	len 2029 bp	mm2 -> 129527171	HMM -> 101150678	(DIFFER)
44042079	len 2039 bp	mm2 -> 129527171	HMM -> 101150678	(DIFFER)
85133359	len 1924 bp	mm2 -> 101151050	HMM -> 129527057	(DIFFER)
127075278	len 4239 bp	mm2 -> 129527057	HMM -> 129527071	(DIFFER)

On 4 of 4 multi-mapping FLNC reads in GGO.bam at GOLGA8I, gap-aware HMM picks a different copy than minimap2. HMM uses the soft-clipped (unaligned) read region as evidence against copies that lack that sequence