



- Copy-assignment test, scored in the source family\* ▼ Union test (one test over all placements) Bar: share with  $\geq 1$  decisive site in the source family\*
- ✱ Default output, any assigned result ✱ Aligner's primary alignment

Rows: identity of the source copy to its most similar directly aligned copy (100%\* = over the aligned segment,  $\geq 50\%$  of the shorter copy).  
Lines: 95% interval resampling source copies.

**a**

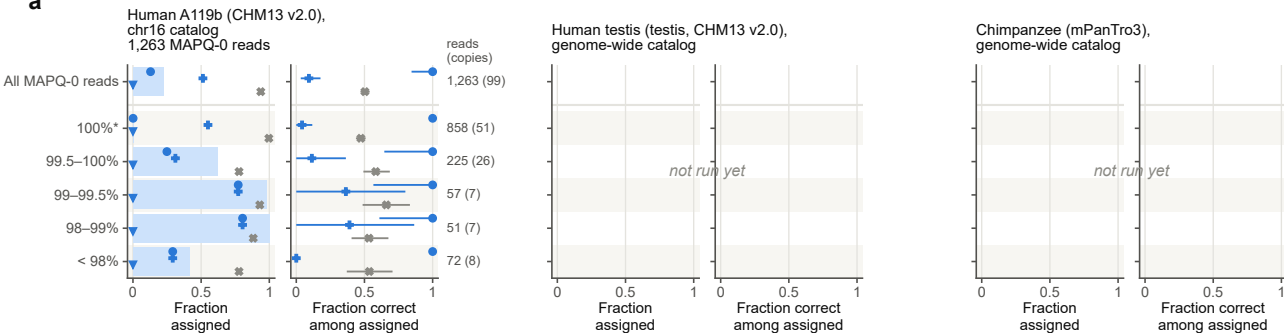


**b**

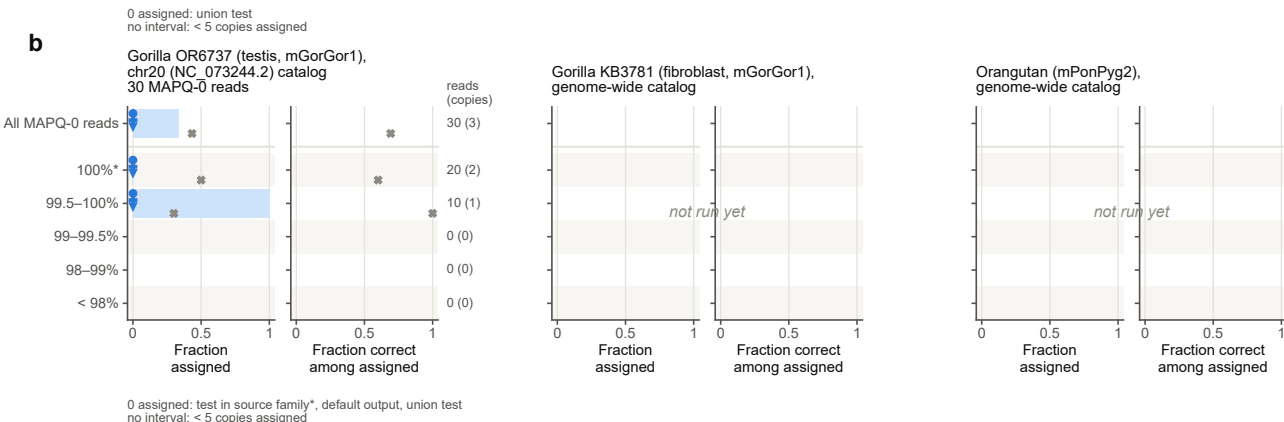

**c**

Real reads: hard molecules ( $\geq 2$  equal-best alignments, one in a catalog copy) whose exact intron chain a method's transcript carries

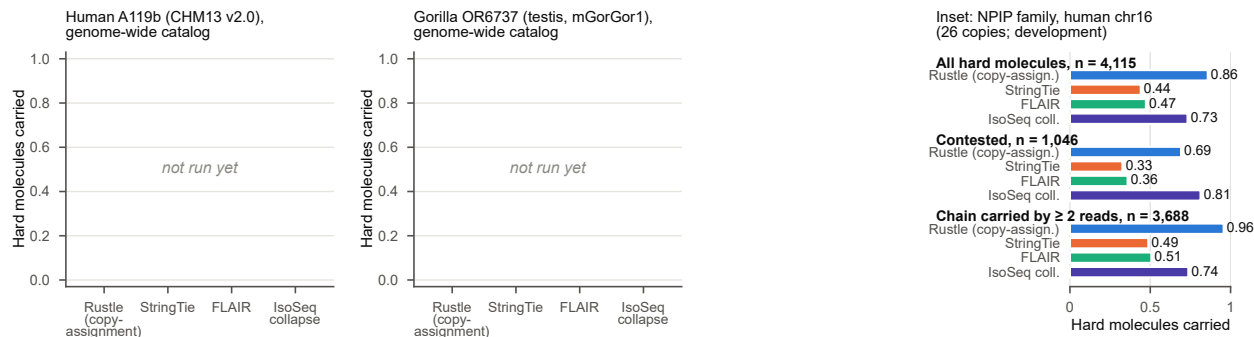

\* Scored within the read's source family, which is known only in simulation. Rustle's arm in c is the copy-assignment step's own transcripts (copy\_assign -gtf), not the assembler of Figs 1–3; the hard set is defined by that step's gate. Black bars in c: all hard molecules pooled; points: families.