




Each read, under the margin rule at T = 10 and Rustle (union test for MAPQ=0 reads); black ticks: where the margin rule's part ends at T = 1 and T = 20




a Simulated reads (truth = source copy), T = 10

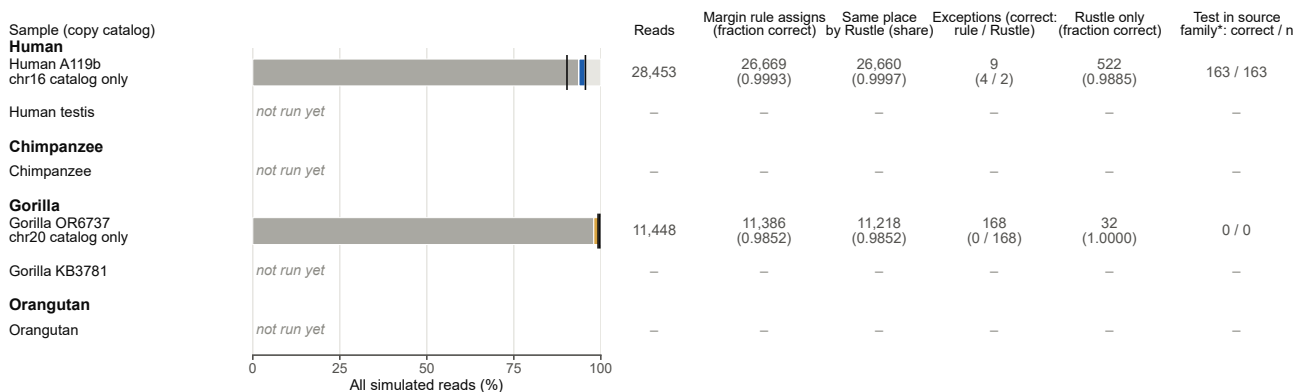

b Simulated reads by identity of the source copy to its most similar directly aligned copy (100%* over the aligned segment), T = 10

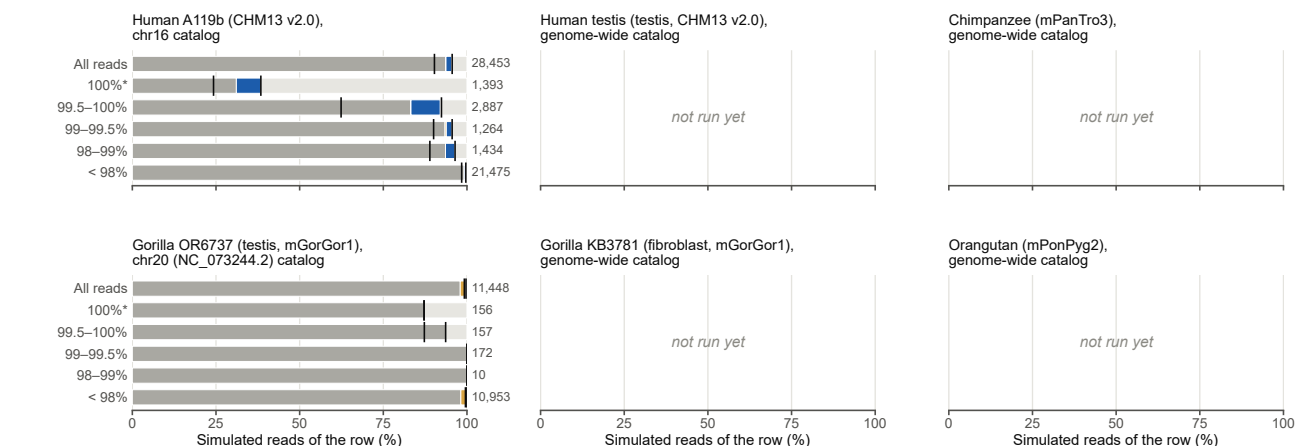

c Real reads, no truth: agreement and coverage only

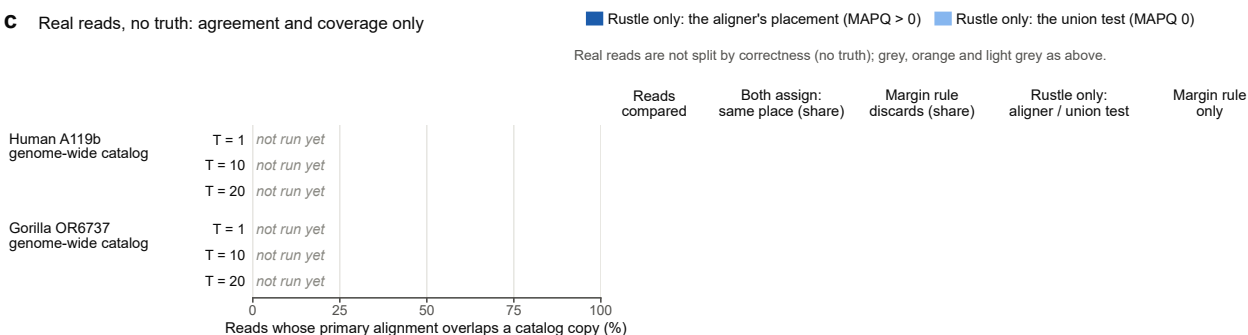

Margin rule (Eichler lab): a read is assigned to its best-scoring alignment only if no other alignment of the read, anywhere in the genome, scores within T alignment-score units (a read with no other alignment is assigned); otherwise it is discarded. Rustle leaves reads with MAPQ > 0 at the aligner's primary alignment and applies the copy-assignment test to MAPQ=0 reads (union test: one test per read over all its alignments). * Scored within the read's source family, known only in simulation. Development tables (one contig's catalog per sample, reads mapped to the whole genome); the genome-wide catalogs of all six samples replace them.