
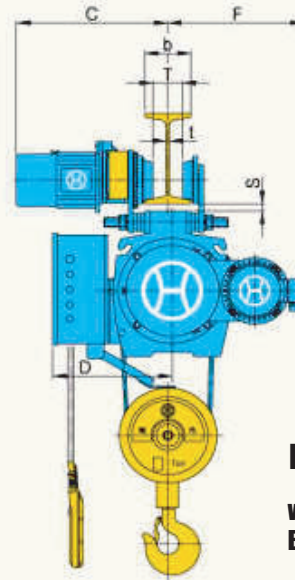


Ordinary Type

Creep Hoist With Motor-Driven Trolley(HM)

MONO RAIL CREEP TYPE

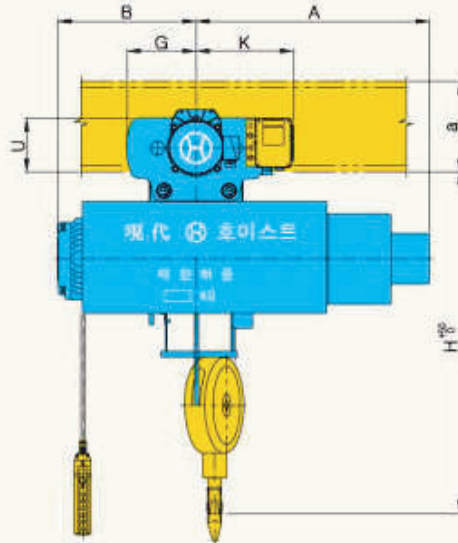

INGEVER ASOCIADOS

www.ingeverasociados.com
Barranquilla - Colombia

Capacity (ton)				1					2					2.8, 3					5					
Hoist	Lift Height(m)			6(12)					6(12)					6(12)					6(12)					
	Hoisting Speed (m/min)	50Hz		10/1					8.3/0.83					7.5/0.75					4.7/0.47					
		High/Creep 60Hz		12/1.2					10/1					9/0.9					5.6/0.56					
	Hoisting Motor (kW×P)		High/Creep		2.2/0.4×4					3.7/0.4×4					5.5/1.1×4					5.5/1×6				
	Wire Rope	Construction		6×24					6×37					6×37					6×37					
		Dia.(mm)×no.of ropes		8×2					10×2					12.5×2					16×2					
Brake				DC magnet disc																				
Traversing	Traversing Speed (m/min)	High Speed	50Hz		20					20					20					20				
			60Hz		24					24					24					24				
		Low Speed	50Hz		13.3					13.3					13.3					13.3				
			60Hz		16					16					16					16				
		Dual Speed	50Hz		13.3/6.7					13.3/6.7					13.3/6.7					13.3/6.7				
			60Hz		16/8					16/8					16/8					16/8				
	Traversing Motor (kW×P)	High Speed		0.75×4					0.75×4					0.75×4					0.75×4					
		Low Speed		0.5×6					0.5×6					0.5×6					0.5×6					
		Dual Speed		0.8/0.4×4/8					0.8/0.4×4/8					0.8/0.4×4/8					0.8/0.4×4/8					
	Brake				DC magnet disc																			
Dimension (approx.) (mm)	H		815					960					1115					1325						
	A		588(636)					630(680)					754(804)					836(886)						
	B		492(531)					544(581)					560(598)					640(673)						
	D		303					330					388					415						
	G		212					225					225					275						
	K		304					314					314					349						
I-beam and Spacing (mm)	a×b×t		C	S	F	T	U	C	S	F	T	U	C	S	F	T	U	C	S	F	T	U		
	200×100×7		454.5	35	383	48	144	465	32	419	46	170	465	32	432	46	170	—	—	—	—	—		
	250×125×7.5		467	33	383	73	146	478	30	419	71	172	478	30	432	71	172	483	40	459	60	216		
	300×150×10		479.5	27	383	98	152	490	24	419	96	178	490	24	432	96	178	495.5	34	459	85	222		
	450×175×13		—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	508	26	459	110	230		
Min. radius of curvature(m)			1.5					1.8					1.8					2.3						
Weight (approx.) (kg)			296(288)					378(378)					508(510)					730(738)						

Note : 양정 12mts 이상의 모델은 당사로 문의 바랍니다. In Case of lift height over 12mts, please contact us.

5ton Hoist까지는 와이어로프가 2줄입니다. 4줄 사용시는 당사로 문의 바랍니다. The number of wire rope is two falls upto 5ton. In Case of using 4falls, please contact us.