AI Agent Studio. 26A.

Agent Team of type “Workflow”.

Prompt to Array to Loop with If Condition.

Introduction/Goal.

In this demo we will show how:

- Create a “Prompt” to convert user input data in an array to process in next step.
- “Loop” feature included in the Release 26A for Workflow Agent Teams.
- Run a dummy action (mail) that could be replaced with any complex action (REST API or OIC integration, etc).

Create Agent Team of type Workflow.

Name: AA_DEMO_ARRAY_FIN.

General overview.

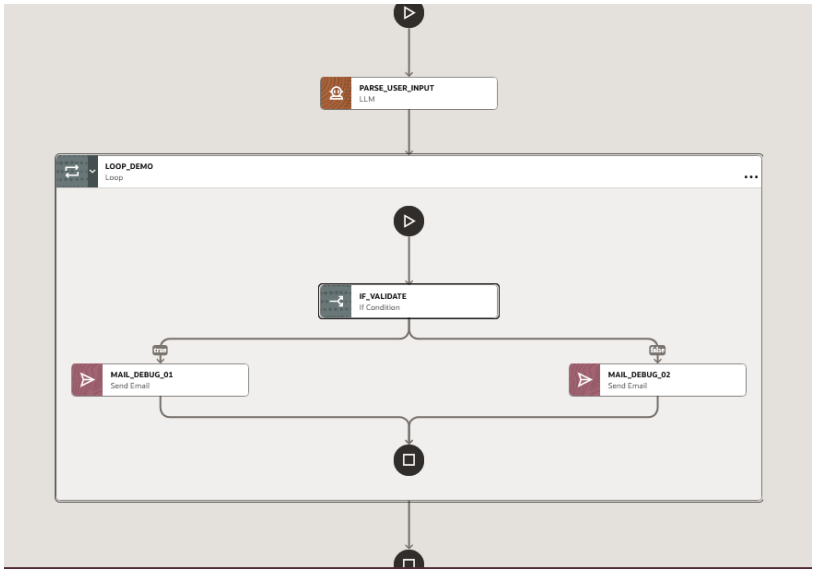

LLM.

Name: PARSE_USER_INPUT

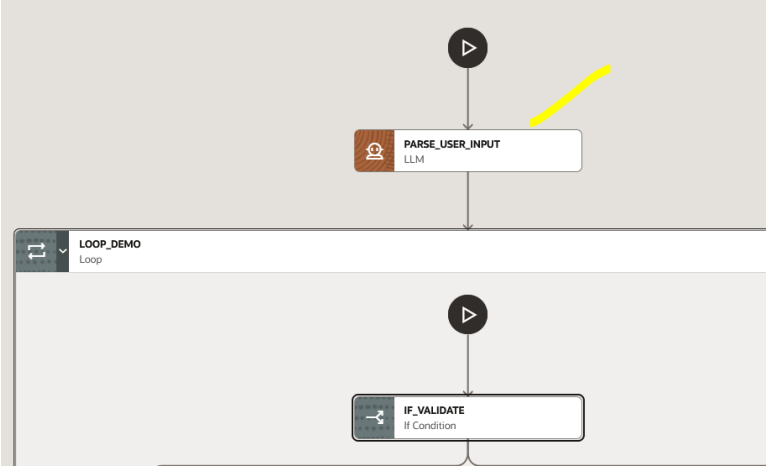

Prompt.

System/Instruction

You are an information extraction assistant.
Based on the user input {{$context.$system.$inputMessage}}, produce variables: vInvoices, vBusinessUnit following the rules below.

Return ONLY a single JSON object with these keys and values.

Automatic Translation
The agent will automatically detect the language of the user's request and respond accordingly.

Extraction rules

vInvoices:
- Extract all invoices mentioned. Return as a comma-separated array, where each invoice is wrapped in single quotes.
  Example: If the user question is 'Get me invoices 00001 and 00002, then the output MUST be of format ['00001','00002'].

vBusinessUnit:
- set vBusinessUnit using input from user. Example " use Business Unit US1 Business Unit".

vBusinessUnitPrefix:
- set vBusinessUnitPrefix using the 4 first characters of vBusinessUnit.

Output format
Return ONLY this JSON:
```
{
  "vInvoices": "Array of strings",
  "vInvoiceCount": "<numeric>",
  "vBusinessUnit": "<string>",
  "vBusinessUnitPrefix": "<string>"
}
```

Output.

```
{
        "$schema": "http://json-schema.org/draft-04/schema#",
        "type": "object",
        "properties": {
                "vInvoices": {
                        "type": "array",
                        "items": {
                                "type": "string"
```

```
                                        },
                                        "vInvoiceCount": {
                                                "type": "numeric"
                                        },
                                        "vBusinessUnit": {
                                                "type": "string"
                                        },
                                        "vBusinessUnitPrefix": {
                                                "type": "string"
                                        }
                                }
                        }
}
```

Loop.

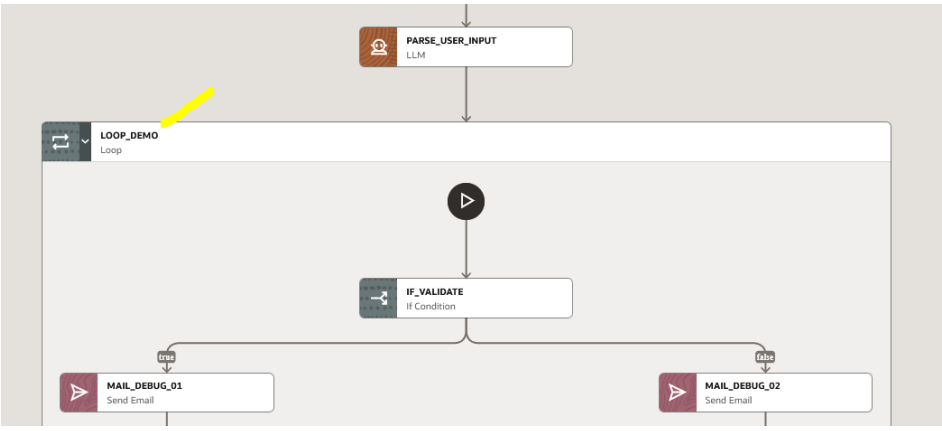

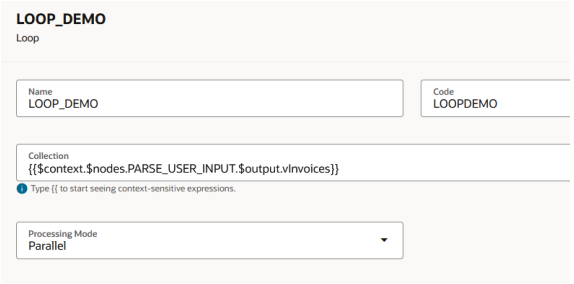

Collection:

```
{{$context.$nodes.PARSE_USER_INPUT.$output.vInvoices}}
```

If Condition.

We will get true when invoices start with “INV-“ and business unit selected is in the provided list.

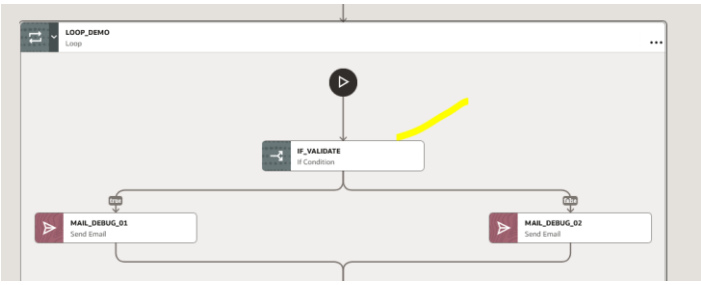

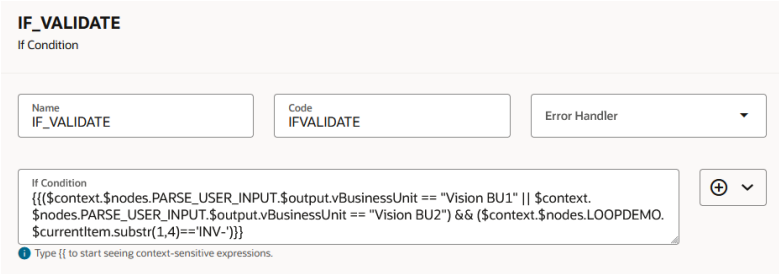


```
{{($context.$nodes.PARSE_USER_INPUT.$output.vBusinessUnit == "Vision BU1" ||
$context.$nodes.PARSE_USER_INPUT.$output.vBusinessUnit == "Vision BU2") &&
($context.$nodes.LOOPDEMO.$currentItem.substr(1,4)=='INV-')}}
```

Mail 1.

MAIL_DEBUG_01

Send Email

Name
MAIL_DEBUG_01

Code
MAILDEBUG01

Recipients
i[redacted]ontero@hotmail.com

Type {{ to start seeing context-sensitive expressions.

CC

Type {{ to start seeing context-sensitive expressions.

Email Subject
IF returned TRUE

Type {{ to start seeing context-sensitive expressions.

Email Template
Dear friend,

Current values in your loop.

Business unit : {{$context.$nodes.PARSE_USER_INPUT.$output.vBusinessUnit}}

Invoice is : {{$context.$nodes.LOOPDEMO.$currentItem}}

Invoice substr is : {{$context.$nodes.LOOPDEMO.$currentItem.substr(1,4)}}

Invoice length is : {{$context.$nodes.LOOPDEMO.$currentItem.length}}

Type {{ to start seeing context-sensitive expressions.

Template.

Dear friend,

Current values in your loop.

Business unit : {{$context.$nodes.PARSE_USER_INPUT.$output.vBusinessUnit}}

Invoice is : {{$context.$nodes.LOOPDEMO.$currentItem}}

Invoice substr is : {{$context.$nodes.LOOPDEMO.$currentItem.substr(1,4)}}

Invoice length is : {{$context.$nodes.LOOPDEMO.$currentItem.length}}

Mail 2.

MAIL_DEBUG_02

Send Email

Name
MAIL_DEBUG_02

Code
MAILDEBUG02

Recipients
[redacted]ontero@hotmail.com

Type {{ to start seeing context-sensitive expressions.

CC

Type {{ to start seeing context-sensitive expressions.

Email Subject
IF returned FALSE

Type {{ to start seeing context-sensitive expressions.

Email Template
Dear friend,

Current values in your loop.

Business unit : {{$context.$nodes.PARSE_USER_INPUT.$output.vBusinessUnit}}
Invoice is : {{$context.$nodes.LOOPDEMO.$currentItem}}

Type {{ to start seeing context-sensitive expressions.

Test 1.

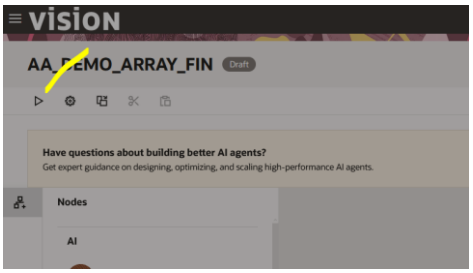

Get me JSON for invoices INV-0000A using Business Unit "Vision BU1"

Result.

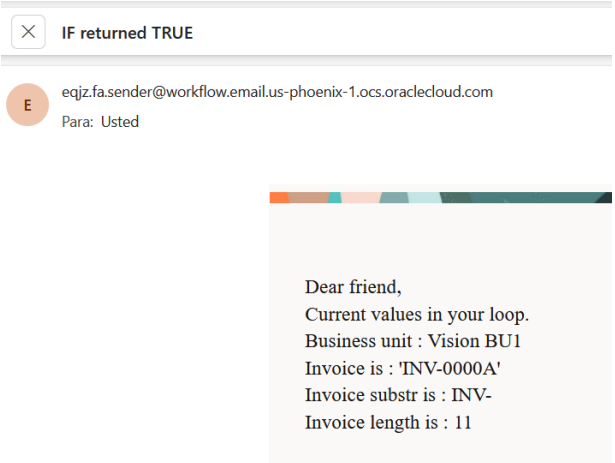

Notice in the iteration of invoices “If Condition” is applied.

Test 2.

Get me JSON for invoices INV-0000A, XX02 using Business Unit "Vision BU1"

Result.

Notice in the iteration of invoices “If Condition” is applied.

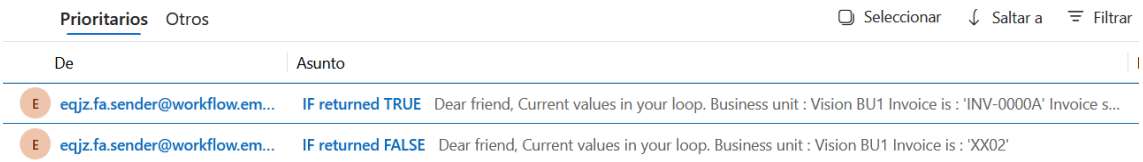

Test 3.

Get me JSON for invoices INV-0000A, XX02 using Business Unit "XXX Vision BU1"

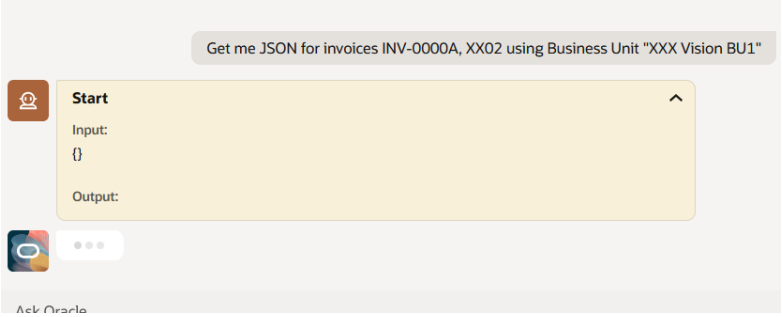

Result.

Notice in the iteration of invoices “If Condition” is applied.

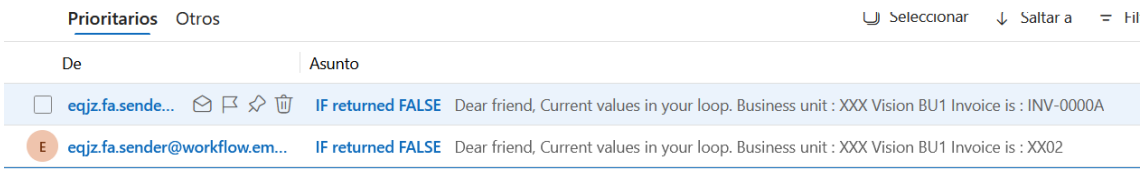

Conclusion.

The user can enter text with several invoices (comma separated), we are able to convert to an array.

Then we can iterate the array and conditionally with “If condition” node run any action.

Technical

Code example	Comments
v3_AADEMO_ARRAY_FIN.json	Agent Team code ready to import and test.