byte-stream

01000001 01101101 01110000

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| File | Object | File, String<br>String<br>String, String | createNewFile()<br>delete()<br>exists()<br>isDirectory()<br>isFile()<br>list()<br>mkdir()<br>renameTo() |
| FileWriter | Writer | File<br>String | close()<br>flush()<br>write() |
| BufferedWriter | Writer | Writer | close()<br>flush()<br>newLine()<br>write() |
| PrintWriter | Writer | File (as of Java 5)<br>String (as of Java 5)<br>OutputStream<br>Writer | close()<br>flush()<br>format()*, printf()*<br>print(), println()<br>write() |
| FileReader | Reader | File<br>String | read() |
| BufferedReader | Reader | Reader | read()<br>readLine() |
| | | | *Discussed later |

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| File | Object | File, String<br>String<br>String, String | createNewFile()<br>delete()<br>exists()<br>isDirectory()<br>isFile()<br>list()<br>mkdir()<br>renameTo() |



| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| FileReader | Reader | File<br>String | read() |

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| FileWriter | Writer | File<br>String | close()<br>flush()<br>write() |

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| `BufferedReader` | `Reader` | `Reader` | `read()`<br>`readLine()` |

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| BufferedWriter | Writer | Writer | close()<br>flush()<br>newLine()<br>write() |

| java.io Class | Extends From | Key Constructor(s) Arguments | Key Methods |
|---|---|---|---|
| PrintWriter | Writer | File (as of Java 5)<br>String (as of Java 5)<br>OutputStream<br>Writer | close()<br>flush()<br>format()*, printf()*<br>print(), println()<br>write() |


I
II
III

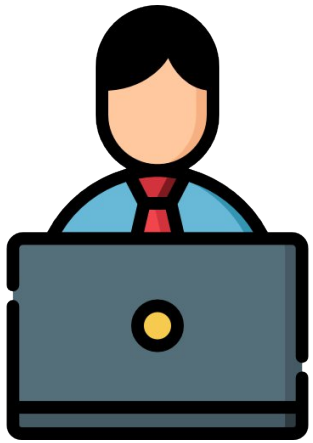
I
II
III