

— PRODUCT DESIGN · BUILD HANDOFF

Jube v2: AML and fraud transaction monitoring platform

What is being built: the platform and its design foundation, the AI layer, how people work, then every screen in detail.



PREPARED BY
Jube Operations Limited

DATE
4 October 2026

STATUS
Build handoff

 READ THIS FIRST

Most of this already exists

This document looks like a large build. It is not. Jube's backend is modern, complete and in production, and much of it is already in the current interface, just hidden and hard to use. Version 2 is mostly a new face on capability that is already there, and much of the work is mechanical.

Jube challenges billion-dollar vendors by shipping a feature in less time than they take to agree a roadmap. The method is to plan hard and execute easy. Agentic AI shows it: Jube researched it for three years and waited until the conditions were right, chiefly the Microsoft Agent Framework, a flash model that made the project practical, and the working patterns that only settled in 2026. Then it shipped.

This document is the plan hard part. Each piece will be challenged and reworked as it is built, and the final version may look very different, or not. It still matters: the front end is the simple, mechanical part, but the decisions made here last five years or more.

- **Feature complete.** Real-time detection, models and Exhaustive adaptation, rules, sanctions, reprocessing, case management and visualisation all work today. Version 2 does not build a detection platform; it makes the one that exists usable all day.
- **New endpoints are needed, but they are small.** Configuration screens are generated from the existing DTOs. Where a screen needs a call that does not exist yet, it follows the same pattern as every other part of Jube: a minimal API endpoint over the semantic service layer, a repository and the ORM. Most add an endpoint and a service method over data Jube already holds; the interaction tables mark each one Exists, Extend or New.
- **AskJooby is a reality, and it is the future surface of Jube.** The full page and the pop-up are in use today, and agentic AI is in master and open source from 18 October 2026. Jube was a platform first and added agentic AI on top of service layers and an architecture that already existed. That order is the advantage. Agents only became dependable in 2026, through retrieval (RAG) and tightly controlled agent workflows, and only affordable through the new flash models, and every one of them needs a real platform underneath. AI vendors that started without one are now rushing to build a platform, or retreating to managed services. Jube already has the platform.
- **Agentic AI first, and safe.** Jube Holdings owns the copyright in Jube's code, documentation, schemas and artefacts, so Jube can describe the whole platform to an agent: every service-layer method carries a rich, typed description, including methods and RAG resources never exposed as an endpoint. Anything a person can do in Jube, an agent can do through that same layer, with the same permissions, audit trail and maker-checker. That description is itself part of the work. An index built by chunking and embedding

Jube's service layer, schemas or documentation carries Jube's structure with it, and an agent or interface served from it over a network falls within the AGPLv3, wherever it runs and whatever API sits in between.

- **What is genuinely new is concentrated:** the case workspace, held payments and recovery, claims, assurance and similar cases.

The hard part was built first. What remains is to let people see it.

CONTENTS**PART I · THE PLATFORM**

- 1 The platform and its design foundation
- 2 AskJooby: the AI layer
- 3 What is being built and in what order

PART II · HOW PEOPLE WORK

- 4 The workspace at a glance
- 5 Journeys

PART III · THE SCREENS IN DETAIL

- 6 Finding work: the Cases page
- 7 Supervising: Team view, Inbox and the command palette
- 8 The case page
- 9 Why it alerted: activations and explanations
- 10 The Journal
- 11 The Network
- 12 Drawers
- 13 Notes and writing
- 14 Case history and audit
- 15 Operations
- 16 Payments: holds, release and refuse
- 17 Payments: inbound holds, recall and payee checks
- 18 Claims and customers who need support
- 19 Reporting and referrals
- 20 Assurance and automation
- 21 Suppressions and lists
- 22 Configuration

PART IV · REFERENCE

- 23 Endpoints
- 24 Build handoff
- Appendix A. Regulatory basis

PART I

The platform

What Jube is, the decisions that shape every screen, the AI layer, and the order of the build.

1. The platform and its design foundation

1.1 What Jube is, and what version 2 changes

Jube is an open-source, real-time anti-money-laundering and fraud transaction monitoring platform. Every transaction passes through a model: request XPath extraction, inline functions and scripts, lists and dictionaries, gateway rules, TTL counters, abstraction rules and calculations, HTTP adaptations (external machine learning), and activation rules that can elevate the response, notify, watch or open a case. Around that engine sit case management, reprocessing, Exhaustive adaptation (Jube's own model training), sanctions screening, visualisations, administration, multi-tenancy and preservation.

Version 2 rebuilds the interface to all of it on one design foundation. Moving every configuration screen is largely mechanical, because each one becomes a form and a grid generated from its existing DTO. It is still high-impact: the whole product changes stack, security model, live-update model and governance at once. Case work, payments and claims are redesigned outright (sections 6 to 19). The decisions below apply everywhere and come before any screen.

AI-first, on its own platform. Jube is moving to an AI-first stance. AskJooby is present on every page and inside case work, and its agents (open source in master from 18 October 2026) investigate, summarise and draft changes over the same models, archive and network that make the decisions. Most AI-first case tools sit on someone else's detection; Jube owns both layers (section 2).

1.2 Design decisions for the whole platform

Application

- **One Vue 3 single-page application** replaces every Razor page. The server serves the app for every non-API path; Vue Router owns navigation. The new interface replaces the current one in a single release, never page by page.
- **Built in CI, vendored in the repository.** Components are compiled with Vite and the output is checked in and served by `Jube.App`, so the product still installs and runs without Node, and no template is compiled in the browser.
- **Types come from the C# DTOs**, generated from the OpenAPI document on every build. No API type is written by hand.
- **One component library:** daisyUI 5 (light and dark themes, comfortable and compact density), Tabulator for every grid, Lucide icons, `Jube.Charting` server-rendered SVG for every chart. Kendo, ACE and Radzen are removed. jQuery QueryBuilder stays, isolated in one rule-builder component; Jube's own lightweight coder replaces ACE for rule, SQL and JSON editing.

- **Two screen tiers:** the desk (1280 px and wider) has everything; smaller screens get read-and-act only (summary, activations, held payments, Inbox, approvals).

Configuration: one generic renderer

- **Every configuration object is described once, on its DTO,** with form-field and list-column attributes. A schema endpoint serves that description, and one form renderer and one grid renderer draw every model, case workflow, administration and visualisation screen from it. Adding a field to a DTO adds it to the screen.
- **Hub cards replace trees** for navigating parent and child objects, with breadcrumbs and counts.
- **Model governance:** lists and dictionaries become model artefacts, changed through versioned change sets with a diff, a backtest and approval, and recorded in the model snapshot. Suppression is the only override, always time-bound and recorded on every match it affects (section 21).
- **Legal limits are data:** hold ceilings, recall windows and reimbursement rules are versioned tables per market and scheme, published with maker-checker (section 22).

Data and live updates

- **TanStack Query holds all server data;** Pinia holds only client state.
- ****The existing `ServiceChangeHub` is the single live channel.**** Every service-layer write already publishes a change; the client uses it only to mark cached data stale, which then refetches. No state is copied over the socket. A small new `CaseHub` carries presence only. Money-critical views also poll every 30 seconds as a safety net.
- **An update never overwrites someone's edit:** they see "Changed by X · Reload" instead.

x Platform engineering

- **Tests:** xUnit coverage of the service layer; an integration suite that runs real invocations end to end through model execution; component tests for the Vue screens and Playwright journey tests.
- **Master is the release:** changes merge to master continuously; the new interface is the exception and replaces the current one in a single release (section 3).

Security

- **The session token lives in a tab-scoped secure store** and is sent as an `Authorization: Bearer` header. Cookies are removed from the authentication pipeline, so there is no CSRF surface; a new tab signs in again.
- **Strict content security policy:** no `unsafe-eval`, no inline script, Trusted Types, and no HTML from data (`v-html` is banned). Same origin only.
- **Step-up re-authentication** for irreversible actions (file, approve, break lock, release, refuse, reimburse): an authenticator code first, then passkeys; no SMS. For payment decisions, the step-up is bound to the exact decision previewed.
- **Audit by construction:** every action is a previewed operation that writes a case event to a hash-chained journal; views of cases are recorded too.

Case and action foundations

- **Every action is Preview then Execute:** the server states the consequences before anything happens, and executes exactly what was previewed.
- **Every clock is a diary:** SLAs, payment holds, recall answers and claim deadlines sort the work, escalate and appear on the Team view the same way.
- **External calls are honest:** a call that leaves Jube shows its steps and says "Outcome unknown" rather than guessing; retries reuse the same idempotency key.

AI

- **AskJooby is part of every screen:** a full chat page and a corner pop-up with page context, both existing today; Bites (short grounded narratives) in case work; agents that investigate with read-only tools.
- **It assists and cites; it never decides.** It uses the asking user's permissions, logs every tool call and links every claim to a fact. Generated narratives are stateless calls built by the server from a registered, versioned frame.
- **Changes go through snapshots and maker-checker:** an agent drafts a change set on a draft model snapshot with a backtest; a person submits it and a second person approves it with step-up. Agents never publish, never create a suppression and never choose a claim exception.

Language and accessibility

- **Localisation through locale files in the Vue project,** English as the source; one language per interface, with Latin transliteration beside Arabic names. Tenant-configured labels carry their own translations.
- **WCAG 2.2 AA:** keyboard first (every action has a key and the command palette), timers that warn before they expire, nothing signalled by colour alone.

1.3 Moving the whole product

Area today	In version 2	Kind of change
Model configuration: request XPath, inline functions and scripts, gateway rules, tags, TTL counters, abstraction rules and calculations, HTTP adaptations, activation rules, watcher, notifications, sampling	Generic forms and grids from the DTOs; rule builder and Jube's coder for rules and scripts	Mechanical
Lists and dictionaries	Versioned change sets with diff, backtest and approval	Behaviour changes
Model integrity and backtest	Same functions on Tabulator grids and <code>Jube.Charting</code> charts	Mechanical
Case workflow configuration: workflows, statuses, filters, XPath, forms, actions	Generic forms and grids	Mechanical
Case workflow displays and macros	Displays become components; macros become sequences of previewed operations	Behaviour changes
Case work: skim, lock and next, journals, notes, files, automation	Redesigned: sections 6 to 15 and 20	Redesigned
Payments and claims	New: sections 16 to 18	New
Reprocessing	Generic forms and grids; progress through live updates	Mechanical
Exhaustive adaptation	Training configuration on generic forms; variable statistics and model performance on <code>Jube.Charting</code> ; layout in the last stage	Mechanical, then relayout
Sanctions: loader, searching, model invocation	Generic grid and search page; match detail persisted and shown with the activation	Mechanical, plus match detail
Visualisations: registry, parameters, datasources	Generic forms; SQL in Jube's coder; templated chart definitions with parameters and series instead of raw JSON; a remote web call as a datasource beside SQL; charts and maps as server SVG; HTML output shown in a sandboxed frame, never injected into the page	Mechanical, plus sandboxing
Administration: users, roles, permissions, performance counters	Generic forms; users gain a release limit and step-up enrolment	Mechanical, plus new fields
Authentication and multi-tenancy	New sign-in journey with step-up; bearer token; tenant switcher in the shell	Redesigned
Preservation (export and import)	Generic page	Mechanical

2. AskJooby: the AI layer

Jube is AI-first. AskJooby is on every page and inside the case work itself, and unlike AI-first case tools it sits on Jube's own detection platform: the models, rules, archive, network and audit trail it reasons over are the same ones that scored the transaction. Agentic AI is a delivered milestone: it is in the master branch and fully available as open source from 18 October 2026.

Four rules hold everywhere: AskJooby uses the asking user's permissions and nothing more; every tool call is logged; every claim cites its source; and it never commits anything. Changes come back as proposals that people submit and approve.

2.1 Two surfaces, one conversation history

A1 Full page: conversations, search, personas and agent runs /askjooby · exists today (DeepChat), restyled

+ New chat

Q Search chats

PINNED

Structuring typology, Cairo branches

TODAY

DEV-8831A and its accounts

Tune Structuring 9d draft

C-9041 · from pop-up

THIS WEEK

Mule indicators for new accounts

Explain HTTP adaptation errors

Answers use your permissions only

Every tool call is logged

DEV-8831A and its accounts

Researcher Analyst Agent Rule Writer

C-9041 StructNet v7 Share

Which accounts used DEV-8831A in the last 30 days, and is any of them already a confirmed fraud case?

Agent run · 4 steps · 3.1 s read-only

Four accounts used the device. **ACC-915 Duarte** is a confirmed true positive on C-8812, closed 12 Sep. **ACC-102 Kamal** paid the same beneficiary 53 seconds before Sterling on 24 Sep.

Account	First seen on device	Cases	Outcome
ACC-441 Sterling	02 Sep	C-9041	open
ACC-915 Duarte	28 Aug	C-8812	confirmed TP
ACC-102 Kamal	19 Sep	—	no case
ACC-377 Nabil	21 Sep	C-9015	closed FP

Sources [1] Graph · DEV-8831A [2] C-8812 close note [3] ARC-771203 [4] ARC-770988

Finding · with evidence 3 transactions · 1 closed case

ACC-102 Kamal is a likely associate of the case subject: same device, same beneficiary, 53 s apart.

Add to C-9041 as a fact Link as associate... Show evidence

Retry Analyst Agent · tools logged · run #A-20419

@ case C-9041 @ model StructNet v7 + context

Ask, or type @ to add a case, model, rule or list

Agent mode Read-only tools. Changes come back as proposals.

Fig. 60-askjooby-full-page · Full page: conversations, search, personas and an agent run

A2 Corner pop-up with page context every page · exists today, restyled · same chat history as A1

Case key panel

ACC-441 · Marcus Sterling

Customer since 2019

Lane: Standard · Priority 62

C-9041 · Structuring 9d · StructNet v7 · sanctions match

Section 3 · Journal

Focus ARC-771203 · P2P out · EGP 48,500 · 10:14:55

11 cash deposits · 9 days

Section 4 · Network

AskJooby Researcher

Using this page: C-9041 · Journal · ARC-771203 what Jooby sees

Why is this payment the anchor and not the deposits?

StructNet scored the P2P out, not the deposits. It is the first payment to a new beneficiary [1], 41 s after a login from DEV-8831A [2], and it moves 97% of what the 11 deposits brought in [3]. Structuring 9d anchors on the 11th deposit, so the case has two anchors.

[1] beneficiary age 0 d [2] login 10:14:14 [3] Journal sum

Show on page + Add as fact

Summarise this view Who else used DEV-8831A?

Draft a close rationale

Ask about this page...

Fig. 61-askjooby-popup · Corner pop-up with page context

- **The full page** (exists today, built on DeepChat) is for longer work: a conversation list with search, pinned chats, personas, an agent run shown step by step, tables, sources and Finding cards. Context can be added with @ (a case, model, rule or list).
- **The corner pop-up** (exists today) is on every page. It starts or continues the same conversations, with the page the user is looking at as context. "What Jooby sees" lists exactly what was sent; masked fields and raw payloads are never sent. "Show on page" highlights the rows an answer refers to, and a conversation opens in the full page with one click.
- **On the case page**, AskJooby also takes the Decide column's place (Alt+J), with the suggested next step kept in its header (section 13.3).
- **Answers come in three kinds:** a **Finding** (with evidence, can be added to the case as a fact or opens the matching lightbox), an **Opinion** (no evidence, can be challenged or dismissed), and a **Proposal** (a draft change, section 2.4).

2.2 Personas and agents

- **Researcher** (exists): answers questions over the platform's data and documentation.
- **Analyst Agent:** pre-investigates cases with read-only tools and recommends a disposition (agent triage, section 20.1). Built first.
- **Rule Writer:** drafts rule and list changes, uses the rule parser and Model Integrity's dependency tools, and backtests before proposing. Built second.
- **Later personas:** **Data Analyst** (explains query and chart output, model statistics and Exhaustive results) and **DevOps Support** (reads cluster, PostgreSQL and Redis health and logs) are read-only. **General Administrator** guides entity, tenant, user and role setup, and its changes go through maker-checker like the Rule Writer's.
- **Agent mode** in the composer lets a persona run tools on its own; each run lists its steps, inputs and timings and has a run number for audit.

2.3 Bites

A3 Bites: short narratives dropped into case work no chat · one framed call each · cached until the facts change

Cases page · peek

C-9044 Live money · 6 h Possible 48% · Moderate · 38

EGP 61,000 to a payee who failed the name check, sent two minutes after the warning. The payer is 71 and has never paid this bank before.

Bite · from 5 facts Expand in AskJooby Not useful

Case page · since you last looked

C-9041 last opened by you 2 days ago

Two things changed: C-8812 on the same device was confirmed fraud, and likelihood rose from 41% to 56%. M. Karim added a note after calling the customer.

C-8812 closed TP risk recompute 09:02 note 15:40 Bite

Activation · in one line

StructNet v7 Very high · 0.91 Exact · threshold 0.80

Scored high because the amount is 9× typical, the payee is new, and it left 41 s after a login from a device shared with a confirmed fraud.

waterfall (unchanged)

Journal · focus window

ACC-441 15–24 Sep · 14 rows

11 cash deposits, each just under EGP 50,000, across 4 branches in 9 days: EGP 498,200 in total. 97% left in one payment on day 10.

Journal rows (unchanged)

A Bite is one or two sentences, never more. Every claim links to a fact; with no supporting fact, no Bite is shown. Hover shows the frame, version and facts used. It is never written into a note or report unless someone adds it.

Fig. 62-askjooby-bites · Bites in the Cases page peek, the case page, an activation and the Journal

A Bite is a one- or two-sentence narrative dropped into case work, outside chat: in the Cases page peek, at the top of the case page ("since you last looked"), beside an activation's waterfall, and over the Journal's focus window.

- **One framed call each** (section 2.5), cached until the facts behind it change.
- **Every claim links to a fact.** With no supporting fact, no Bite is shown.

- **Never more than two sentences**, labelled "Bite", with the frame, version and facts on hover, "Expand in AskJooby" and "Not useful".
- **Never written into a note or report** unless someone adds it.

2.4 Proposals through model snapshots and maker-checker

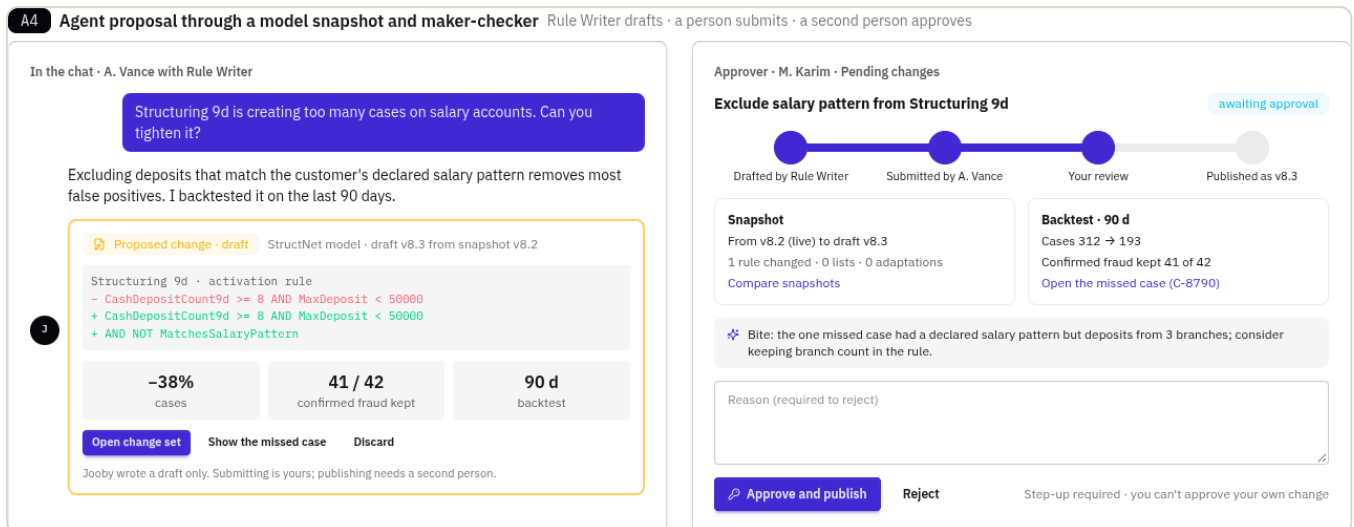


Fig. 63-askjooby-proposal · An agent proposal and the approver's review

When a persona proposes a change to a model (a rule, list, dictionary or threshold), it writes a **draft change set on a draft snapshot** of the model, never to the live model.

- The proposal shows the diff, the snapshot it starts from, and a **backtest** (cases created, confirmed fraud kept, period), with the cases it would have missed one click away.
- **A person submits it; a second person approves** it with step-up, and nobody can approve their own change. The change set records that it was drafted by an agent and for whom.
- Publishing creates the next snapshot version; rolling back publishes the previous snapshot.
- The same path serves list and dictionary changes (section 21.5) and rule tuning from outcomes (section 20.6).

2.5 Generated narratives use framed context, not chat

Every narrative the backend writes is a **direct AskJooby call with a framed context**. That covers the case summary, Compose section drafts, the agent triage summary, the suggested close rationale, report narratives, and activation or journey explanations. Chat context is never used.

- **The server builds the context:** from a registered, versioned **frame** (for example `CaseSummary`, `NarrativeSection`, `CloseRationale`, `ActivationExplain`) and the subject's facts. The browser names only the frame and the subject, never prompt text.
- **Stateless:** no chat history, and nothing said in the AskJooby panel. To use a chat answer, the analyst accepts its Finding card as a fact, and then it is part of the frame like any other fact.
- **Grounded:** every sentence cites the facts it came from. A sentence with no fact is marked an inference (amber) until a person accepts it. Grounds for suspicion stays human-written; Jooby only offers framings.
- **Auditable and reproducible:** each draft records the frame version, a hash of the context, the model and the output, and writes a case event. The same frame version and context can be re-run to compare.
- **Never overwrites a person:** when the facts change, the draft is marked "facts changed since this was drafted · Regenerate · Keep". Nothing is regenerated automatically over edited text.
- **Visible:** each generated text carries "Drafted by Jooby · frame and version · from N facts".

- **Model-supplied text:** the HTTP Adaptation `Narrative` and `HumanLabel` come from the model endpoint's curated templates. They are shown as-is, labelled "from the model", and are not AskJooby output.

Interaction	Call	Status
Draft or regenerate any narrative	CG-37 POST <code>/api/AskJooby/Narrate { frame, subject, params }</code>	New
Frame catalogue	CG-38 GET <code>/api/AskJooby/Frame</code>	New
Provenance popover	CG-39 GET <code>/api/AskJooby/Run/{id}</code>	New

2.6 Similar cases

Why: the Network links cases that share an account, device or payee. Many laundering patterns share none: the same shape of activity recurs across different customers, months apart. Similar cases finds those by comparing cases as a whole, across time, entity and typology. It matters most for layering and integration, where each case alone looks ordinary.

What a case is compared on. Each case keeps two fingerprints, refreshed when its facts change:

- **Story:** the text of the case (notes, action codes, tags, close rationale, report narrative and the activations' rule names), held both as an embedding and as a full-text index. Masked fields are left out.
- **Behaviour:** a fixed set of features computed from the Journal, never by a language model: amounts and their spread, velocity, fan-in and fan-out, time from money in to money out, number of hops, new payees, channels and countries. It is normalised so no single feature dominates.

How it is found. Both live in PostgreSQL next to the cases (pgvector with an HNSW index, plus a GIN full-text index), so a search runs in the same database and in real time.

- **Hybrid retrieval:** a meaning search on the embedding and a word search on the full text run side by side, and their two rankings are merged by reciprocal rank fusion. Word search catches exact references (a payee name, a rule, an IBAN fragment) that meaning search misses; meaning search catches the same story told in different words.
- **Filters first:** tenant, the user's case permissions and the period are applied inside the search, so results are never thinned out afterwards. Cases the user cannot open are left out entirely, not counted.
- **Look alike by:** Story, Behaviour, or Both (the default).

Every match explains itself. A score alone is not evidence.

- Each match shows its outcome (Confirmed fraud, Report filed, False positive, Open), the score as "Similarity 0.84, not a probability", and **why:** the three behaviour features that match most closely ("9–12 cash deposits under EGP 10,000 in 48 h; out to a new payee within 2 h") and the shared words highlighted.
- **Compare** opens the two cases side by side: timelines aligned at the first activation, behaviour features in one table, outcomes and the rules that fired in each.
- Similarity is advisory. It never scores a transaction, opens or closes a case, or appears in a report unless a person adds it: **Add as fact** records "Similar to C-8120 (confirmed fraud): fast pass-through of cash deposits" with the comparison attached; **Link** uses the normal link operation.

Where it appears

- **Case page:** a Similar cases tab in the investigation drawers, with the ten closest matches, outcome counts at the top ("10 similar · 6 confirmed fraud · 3 false positive") and the controls above.
- **Cases page peek:** one line when strong matches exist ("3 similar cases, 2 confirmed fraud").

- **Patterns no rule covers:** a Patterns view under rule tuning (section 20.6) groups recent confirmed cases into clusters by behaviour and shows, for each, how many were caught by which rules. A cluster that mostly came from manual referrals or late detection offers **Draft a rule with Rule Writer**, which follows the proposal path (section 2.4) with a backtest.
- **AskJooby:** the Analyst Agent has a read-only `FindSimilarCases` tool and cites matches as Findings; a similar case's outcome reaches a narrative only once it has been added as a fact.

Shared with AskJooby retrieval. The same PostgreSQL store and the same hybrid search serve AskJooby's retrieval: chunked documentation, the source code tree, generalised example rules, and the descriptions on service-layer methods, which are used to route a request to the right tool.

Guardrails

- Embeddings are computed inside the deployment; no case text leaves it.
- Each vector records its embedding model and version. Changing the model re-embeds into a new column in the background and switches over only when complete, so two models' vectors are never compared.
- Every similarity search made from a case is written to the read audit, with the matches shown.

Interaction	Does	Call	Status
Similar cases tab	Ten closest cases with outcomes and reasons	CG-54 GET <code>/api/Case/{id}/Similar?by=story,behaviour,both&period=</code>	New
Compare	Side-by-side timelines, features and outcomes	CG-55 GET <code>/api/Case/{id}/Similar/{otherId}</code>	New
Add as fact	Records the match and comparison as a case fact	CG-56 POST <code>/api/Case/{id}/Fact { kind: "Similar", caseId }</code> (Preview/Execute)	New
Link	Links the two cases	Existing Link operation	Exists
Patterns view	Clusters of confirmed cases with rule coverage	CG-57 GET <code>/api/RuleTuning/Patterns?period=</code>	New
Re-embed	Background re-embedding after a model change (administrators)	CG-58 POST <code>/api/Similarity/Reindex</code>	New

2.7 Interactions

Interaction	Does	Call	Status
Full page and pop-up chat, chat search	Conversations, history and search	Existing AskJooby chat endpoints (DeepChat)	Exists
Page context	Sends the current page's visible context with the question	Existing chat endpoint, with a <code>pageContext</code> object	Extend
Agent run	Runs a persona's read-only tools and logs each call	Agent endpoints in master from 18 Oct 2026; <code>AskJoobyRun</code> log	Exists (from 18 Oct)
Bite	One framed narrative for a subject, cached by facts hash	CG-52 POST <code>/api/AskJooby/Bite { frame, subject }</code>	New
Proposal	Creates a draft change set on a draft snapshot, with backtest	CG-53 POST <code>/api/AskJooby/Proposal</code> → existing change-set and backtest endpoints	New

3. What is being built and in what order

The parts of the system

Area	What people can do	Sections
Ask and automate with AI	Chat on every page with page context, agents that investigate and draft changes, Bites in case work, similar cases	2
Configure detection	Build and govern models, rules, lists, adaptations and case workflows on one generic set of screens	1, 22
Find the work	See cases ordered by urgency (live money first, then deadlines, then risk), preview without opening, supervise the team	6, 7
Understand the alert	Read why each model and rule fired, with exact contributions and baselines; follow the money in the Journal and the Network	8–12
Record and write	Coded notes, drafts grounded in facts, AskJooby as an assistant that cites its sources	13
Act	Close, escalate, file, link, break a lock, with a preview of every consequence	15
Stop and recover money	Release, refuse or extend held payments with step-up; hold inbound payments to mule accounts; recall payments that have left; use payee name checks as evidence	16, 17
Reimburse	Run APP scam claims against their legal clocks; adapt to customers who need support	18
Report	File reports with approval; take referrals from staff	19
Assure	Audit trail with a hash chain, read audit, QA sampling, outcome monitoring	14, 20
Improve and control	Tune rules from outcomes, automation recipes, agent triage, time-bound suppressions, versioned lists	20, 21

Build order

Each stage is usable on its own and depends only on the stages above it. Detailed phases are in the Vue blueprint (`SKILL.md` , section 4).

Stage	What it delivers	Needs
1 · Foundation	The application shell, sign-in with step-up, live updates, localisation, and the generic renderer with every configuration screen moved onto it (models, case workflows, reprocessing, sanctions, visualisations, administration)	—
2 · Case engine	No new screens: previewed operations, the case event chain, diaries, the case risk worker and archived scores	1
3 · Investigate	Cases page, case page, activations and explanations, Journal with tagging, Network, drawers, notes, case history and read audit	1, 3
4 · Act	All operation lightboxes, maker-checker, held payments with step-up, inbound holds, recall and payee checks	5
5 · Supervise and assist	Team view, Inbox, AskJooby, Compose and generated narratives	5
6 · Assure	QA sampling, requests for information to the customer, suppressions and versioned lists	6
7 · Claims	APP reimbursement claims and support needs	6, 8
8 · Automate and tune	Agent triage, rule tuning from outcomes, automation recipes, web research, similar cases and patterns	7, 8
9 · Finish	Visualisation and Exhaustive relay layout, then hardening: journey tests, accessibility, performance budgets	all

The new interface replaces the current one in a single release once stages 1 to 4 pass their gates; until then the current interface stays in production unchanged.

How to read this document

- Each screen has a figure and an interaction table: what each click, key or search does, the call it makes, and its status: **Exists** (call as is), **Extend** (existing endpoint, new fields), **New**, or **Client** (no call; state in the URL).
- Interaction ids (GH-, CP-, CH-, KP-, S1–S6-, DC-, LB-, TC-, MF-) refer to section 22 of the product specification (`jube_case_management_v2_spec_0.11.md`); CG- ids refer to the endpoint list in section 23.
- Figures are captured from the HTML prototype in the light theme. They are design references, not production code. Names, amounts, references and limits in them (C-9041, ACC-02 Alpha LLC, EGP 25,000) are example data.
- Inbound holds, recall, payee checks, claims, support needs, bulk tagging and the read audit are specified in text and not yet drawn.
- **Stack:** Vue 3 single-page application, daisyUI 5 (light and dark, two densities), Tabulator grids, Lucide icons, `Jube.Charting`, SignalR for live updates.

PART II

How people work

The workspace in one page, then eight journeys that walk through it.

4. The workspace at a glance

Before the detail, the shape of the place. A user spends the day in two screens and a few overlays; everything in Part III sits inside one of them.

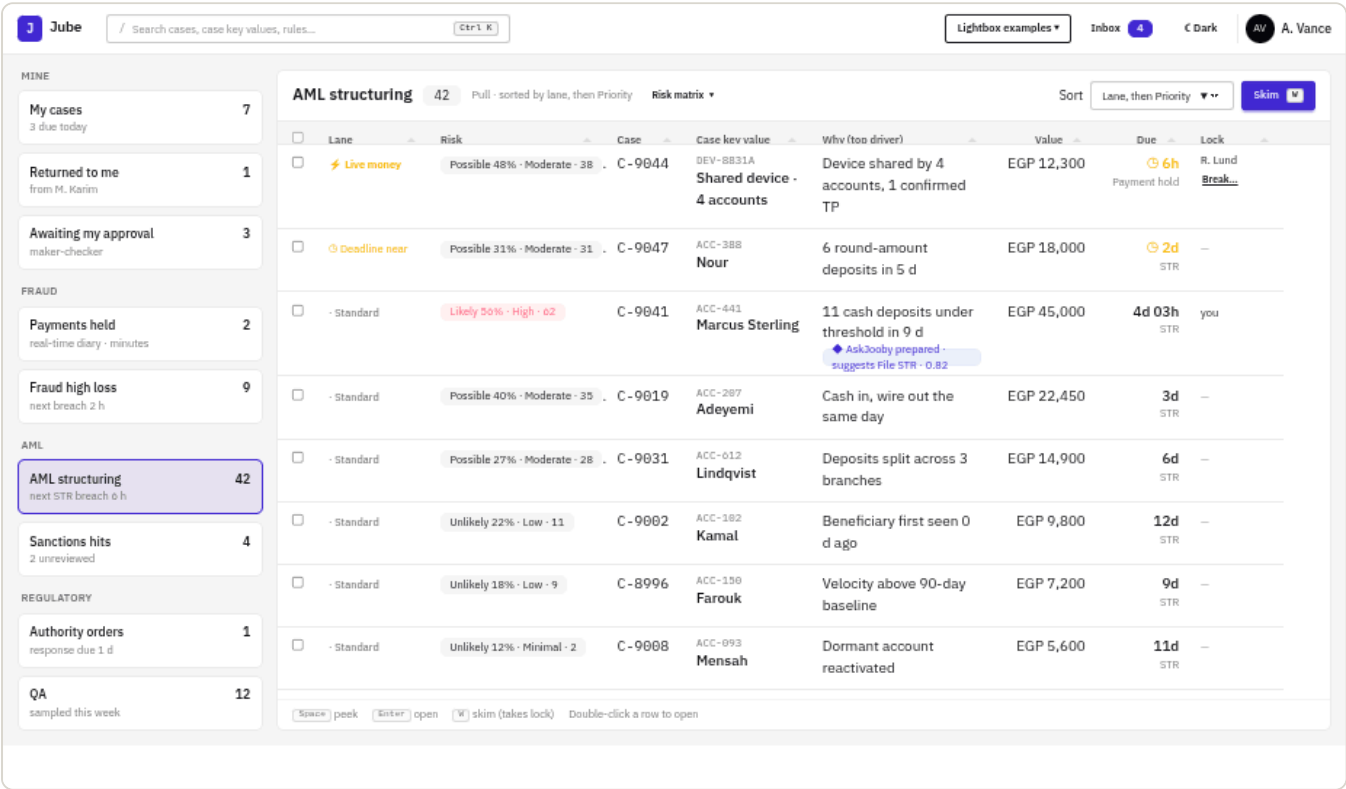


Fig. 01-cases-page · Cases page

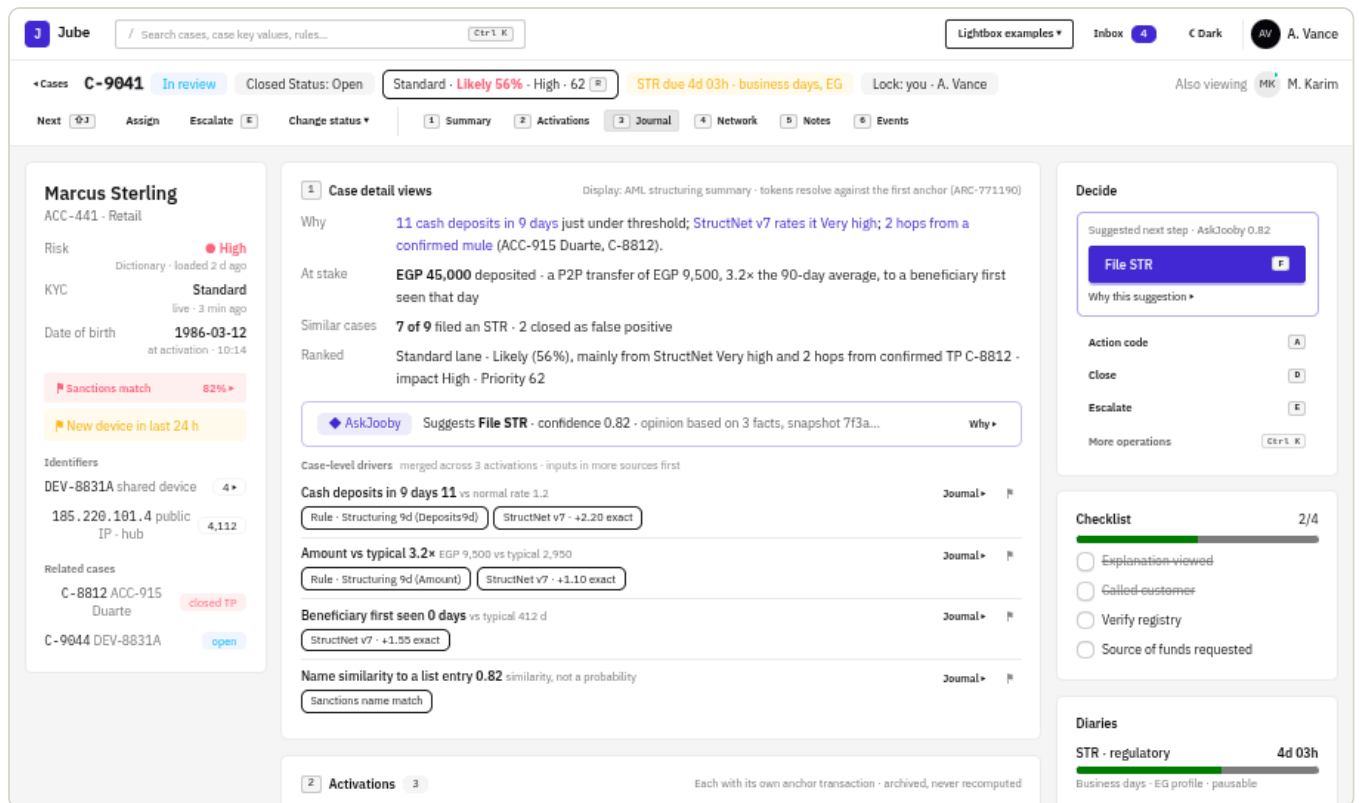



Fig. 04-case-page · Case page

- **Cases page:** filter cards on the left, the case list in the middle ordered by lane then Priority, and a peek drawer on the right (Space). Section 6.
- **Case page:** a header with lane, risk and lock; the case key panel on the left; six sections in the main column (Summary, Activations, Journal, Network, Notes, Case history); and the Decide column on the right with the suggested next step, diaries and AskJooby. Sections 8 to 14.
- **Drawers** open beside the page for a transaction, its raw payload or the model's facts. Section 12.
- **Lightboxes** carry every action: preview, step-up when needed, then the result. Sections 15 to 18.
- **AskJooby** is the corner pop-up on every page and a tab in the Decide column; Bites appear in place. Section 2.
- **Team view and Inbox** serve supervisors and the MLRO; the **command palette** (Ctrl+K) works everywhere. Section 7.
- **Configuration** screens are generated from the DTOs. Section 22.

5. Journeys

Each journey is a path through the screens. ↓ marks what the user does to move to the next state, and ↘ marks a branch.

J1. Triage and open a case (analyst)

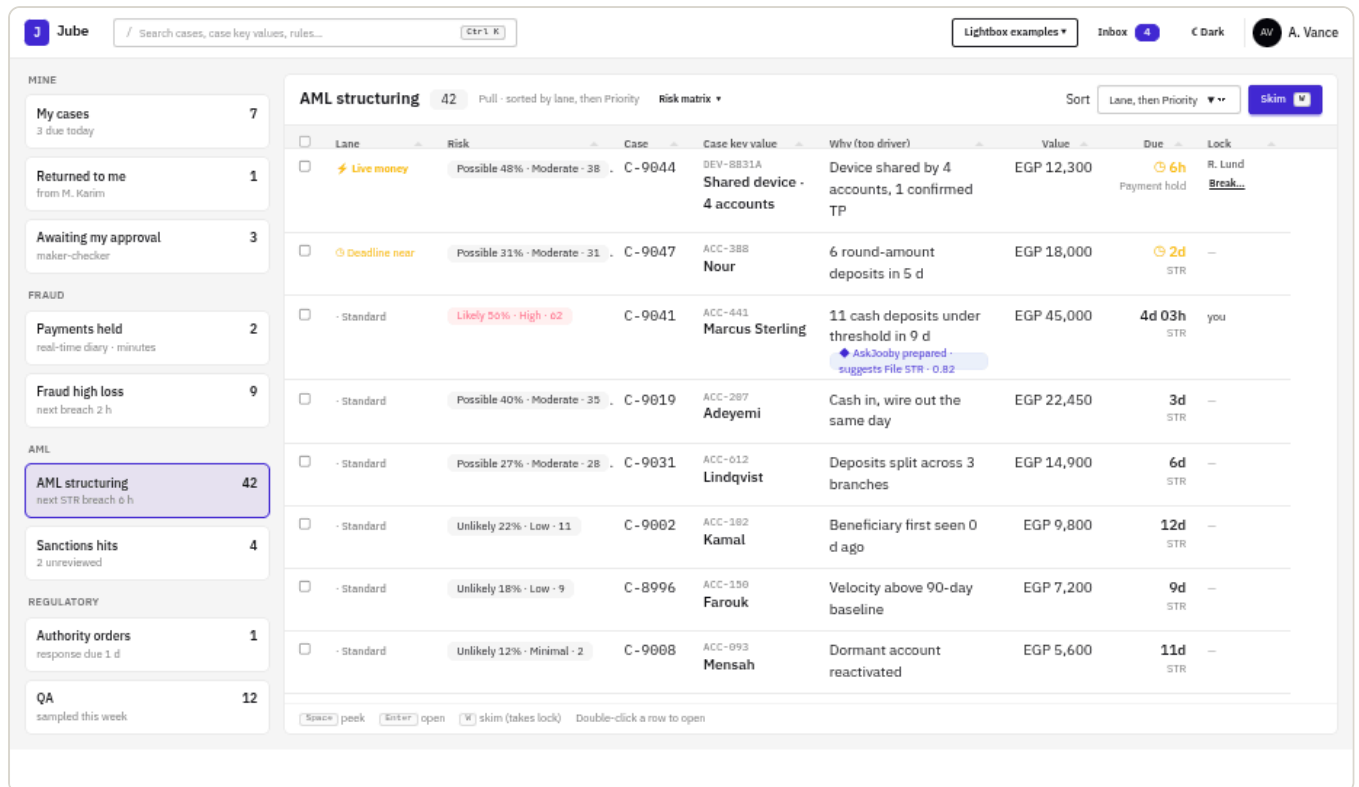


The screenshot shows the Jube interface with a sidebar on the left containing categories like MINE, FRAUD, AML, and REGULATORY. The main area displays a table titled "AML structuring" with 42 items. The table has columns: Lane, Risk, Case, Case key value, Why (too driver), Value, Due, and Lock. The first row is highlighted with a yellow background. The table is sorted by Lane, then Priority. The first row is highlighted with a yellow background.

Lane	Risk	Case	Case key value	Why (too driver)	Value	Due	Lock
Live money	Possible 48% - Moderate - 38	C-9044	DEV-8831A Shared device - 4 accounts	Device shared by 4 accounts, 1 confirmed TP	EGP 12,300	6h Payment hold	R. Lund Break...
Deadline near	Possible 31% - Moderate - 31	C-9047	ACC-388 Nour	6 round-amount deposits in 5 d	EGP 18,000	2d STR	—
Standard	Likely 50% - High - 02	C-9041	ACC-441 Marcus Sterling	11 cash deposits under threshold in 9 d Ask300by prepared - suggests File STR - 0.82	EGP 45,000	4d 03h STR	you
Standard	Possible 40% - Moderate - 35	C-9019	ACC-207 Adeyemi	Cash in, wire out the same day	EGP 22,450	3d STR	—
Standard	Possible 27% - Moderate - 28	C-9031	ACC-012 Lindqvist	Deposits split across 3 branches	EGP 14,900	6d STR	—
Standard	Unlikely 22% - Low - 11	C-9002	ACC-102 Kamal	Beneficiary first seen 0 d ago	EGP 9,800	12d STR	—
Standard	Unlikely 18% - Low - 9	C-8996	ACC-150 Farouk	Velocity above 90-day baseline	EGP 7,200	9d STR	—
Standard	Unlikely 12% - Minimal - 2	C-9008	ACC-093 Mensah	Dormant account reactivated	EGP 5,600	11d STR	—

Fig. 01-cases-page · 1 · Cases page: lanes first, then Priority

↓ **Space** on a row: read-only, no lock taken

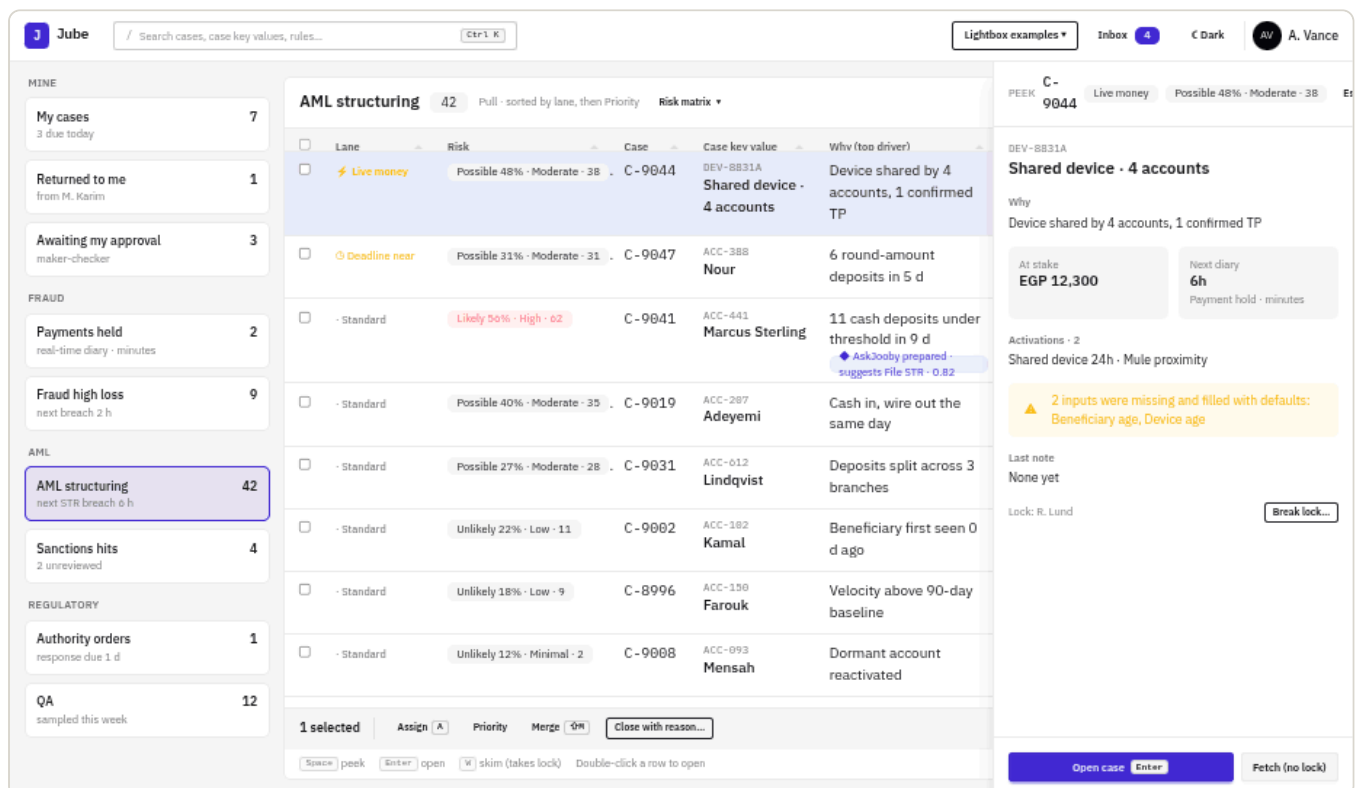

The screenshot shows the Jube interface with a sidebar on the left. The main area displays a table titled "AML structuring" with 42 items. The first row is selected, and its details are shown in a right-hand panel. The table is sorted by Lane, then Priority. The first row is highlighted with a yellow background.

Lane	Risk	Case	Case key value	Why (too driver)	Value	Due	Lock
Live money	Possible 48% - Moderate - 38	C-9044	DEV-8831A Shared device - 4 accounts	Device shared by 4 accounts, 1 confirmed TP	EGP 12,300	6h Payment hold	R. Lund Break...

1 selected | Assign | Priority | Merge | Close with reason...

Space peek | Enter open | W skim (takes lock) | Double-click a row to open

Open case | Enter | Fetch (no lock)

Fig. 03-peek · 2 · Peek

↓ **Enter**: opens the case and takes the lock (or W Skim takes the top case)

The screenshot shows the Jube case page for case C-9041. The sidebar on the left contains case details for Marcus Sterling, including risk level (High), KYC status (Standard), and date of birth (1986-03-12). The main content area displays 'Case detail views' with a summary of the case, including cash deposits, amount vs typical, beneficiary first seen, and name similarity. A 'Decide' panel on the right suggests the next step is 'File STR' with a confidence of 0.82. A 'Checklist' and 'Diaries' section are also visible.

Fig. 04-case-page · 3 · Case page, first paint from one Anchor read

↓ R or hover the risk chip

The screenshot shows the Jube case page for case C-9041, with a risk popover displayed. The popover contains the following information:

- Case risk - C-9041** (cold start · recomputed 4 min ago)
- Likelihood 56% · Likely** (base rate 8% (AML structuring))
- StructNet v7 - Very high** (+1.15)
- Network - 2 hops from C-8812** (+0.83)
- Customer risk tier - High** (+0.44)
- Structuring 9d - shares inputs, counted at 30%** (+0.20)
- Sanctions 0.82 - unconfirmed** (+0.09)
- Log-odds contributions after κ 0.7; they sum exactly to +2.70. Evidence behind it: calibration not yet verified (cold start).**
- Impact High (4) - structuring 3 · ring of 4 accounts +1 · EGP 45,000 (money band 2)**
- Urgency Standard lane - STR due 4d 03h (business days, EG) · moves to Deadline near at 2 d**
- Priority 62 = $\ln(1 + 0.56 \times 30)$, scaled to 0-100**
- Your assessment: none**

The popover is overlaid on the case detail views, which show cash deposits, amount vs typical, beneficiary first seen, and name similarity.

Fig. 05-case-risk-popover · 4 · Case risk popover: why this case, and why now

↳ Disagree? Record your own assessment (Op: AssessRisk). It sits beside the computed one and never replaces it.

J2. Investigate: from explanation to evidence

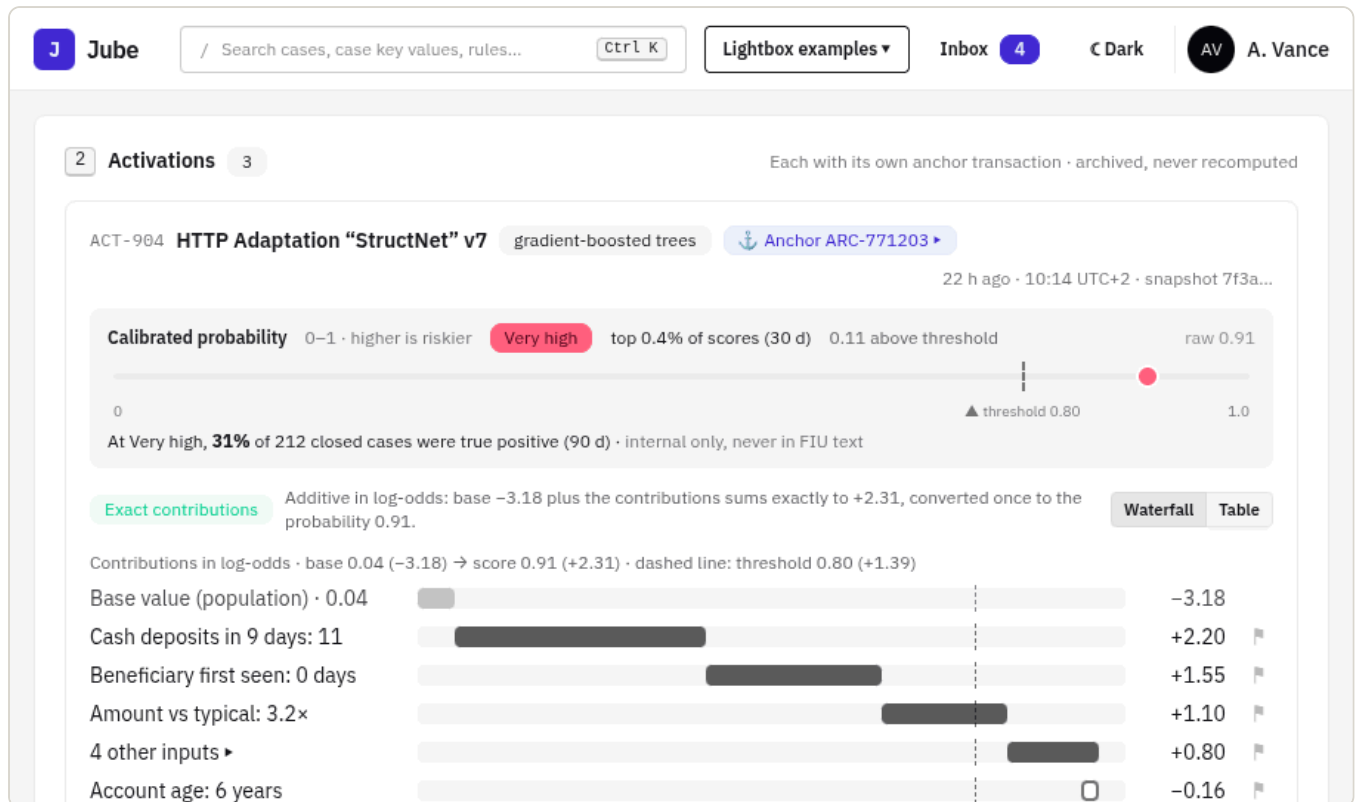


Fig. 06-activation-waterfall · 1 · Activations: what fired and why

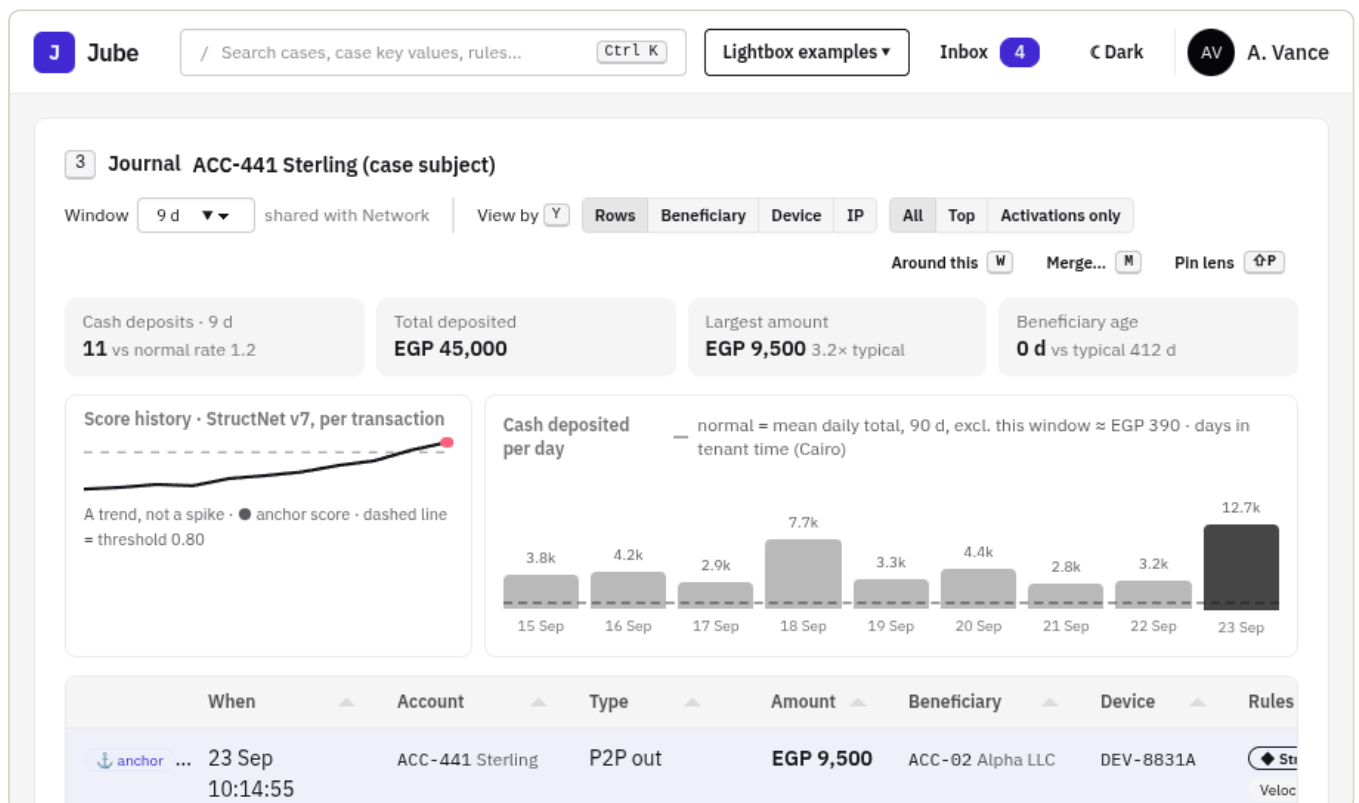
↓ **Journal** ▶ on a driver chip

Fig. 08-journal · 2 · Journal on the case subject, anchors pinned

↓ Click **DEV-8831A** → **Pivot**

J Jube / Search cases, case key values, rules... **Ctrl K** **Lightbox examples ▾** **Inbox 4** **Dark** **AV A. Vance**

3 Journal ACC-441 Sterling (case subject) > **DEV-8831A shared device** **◀ Back** **Alt --** **⚠ Not the case subject**

Back to ACC-441 Sterling

Window **9 d ▾** shared with Network | View by **Y** **Rows** **Account** **Beneficiary** **All** **Top** **Activations only**

Around this **W** **Merge... M** **Pin lens P**

Transactions · 30 d **31** Total **EGP 112,050** Accounts **4 · 1 confirmed TP** First seen **12 Sep**

When	Account	Type	Amount	Beneficiary	Device	Rules
anchor ... 23 Sep 10:14:55	ACC-441 Sterling	P2P out	EGP 9,500	ACC-02 Alpha LLC	DEV-8831A	St Veloc
23 Sep 10:14:02	ACC-102 Kamal	P2P out	EGP 9,800	ACC-02 Alpha LLC	DEV-8831A	New
23 Sep 10:16	ACC-102 Kamal	Login	—		DEV-8831A	
23 Sep 10:12	ACC-441 Sterling	Login	—		DEV-8831A	New

Fig. 09-journal-pivot · 3 · Journal pivoted: "Not the case subject"

↓ **4: Network**; click an edge to filter the Journal to its transactions

J Jube / Search cases, case key values, rules... **Ctrl K** **Lightbox examples ▾** **Inbox 4** **Dark** **AV A. Vance**

4 Network 8 nodes · render cap 150 · window 30 d (shared with Journal) **Graph** **Explode (list view)** **1 hop** **2 hops** **Save graph capture**

Selected node
DEV-8831A shared device
Accounts **4**
Confirmed ACC-915 Duarte · C-TP **8812**
Open cases **C-9044**
P Pivot Journal here
L Link to case
Block Identifier...

● account ● this case key ● confirmed TP ○ case (dashed) Click an edge: the Journal shows the transactions behind it

1 hub hidden: 185.220.101.4 public IP, 4,112 accounts

Fig. 10-network · 4 · Network with shared selection

↓ **Enter** on a Journal row

The screenshot displays the Jube transaction card for transaction **ARC-771203**, dated 23 Sep 2026 10:14:55 UTC+2, with a P2P out of EGP 9,500. The interface is divided into several sections:

- Left Sidebar:** Contains information for the case subject **Marcus Sterling** (ACC-441 - Retail), including Risk (High), KYC (Standard), Date of birth (1986-03-12), and Identifiers (DEV-8831A shared device, 185.220.101.4 public IP). It also lists related cases like C-8812 ACC-915 Duarte and C-9044 DEV-8831A.
- Top Bar:** Shows the case number **C-9041** in review, with tabs for Summary, Activations, Journal, Network, Notes, and Esc.
- Case detail views:** A central panel with tabs for Why, At stake, Similar cases, and Ranked. It provides a detailed analysis of the transaction, including cash deposits, structuring rules, and beneficiary information.
- Right Panel:** Displays keys in the transaction (Account, Beneficiary, Device, IP) and rules that fired on the transaction (HTTP Adaptation StructNet v7, Velocity 1h v3).
- Bottom Bar:** Includes a section for 'What Jube knew then' with metrics like BenefAge (0 d) and Amount (EGP 9,500), and buttons for 'Around this', 'Payload', and 'Add to narrative facts'.

Fig. 14-transaction-card · 5 · Transaction card: what Jube knew then

↓ + Tag

The screenshot shows the **Journal ACC-441 Sterling (case subject)** interface. It features a table of transactions with columns for When, Account, Type, Tags, Amount, and Beneficiary. A tag menu is open over the 'Cash placement' tag, showing options for AML TYPOLOGY (Structuring, Cash placement, Layering) and FRAUD TYPOLOGY (Mule, Account takeover, APP scam). The menu also includes instructions on how to set up tags in the configuration.

When	Account	Type	Tags	Amount	Beneficiary
23 Sep 10:14:55	ACC-441 Sterling	P2P out	Structuring, Layering	EGP 9,500	ACC-02 Alpha LLC
23 Sep 09:40	ACC-441 Sterling	Cash deposit	Cash placement	EGP 9,500	
23 Sep 10:12	ACC-441 Sterling	Login			
23 Sep 09:02	ACC-441 Sterling	Cash deposit			
22 Sep 16:40	ACC-441 Sterling	Cash deposit			
21 Sep 11:25	ACC-441 Sterling	Cash deposit			
20 Sep 14:05	ACC-441 Sterling	Cash deposit			

Fig. 30-tag-menu · 6 · Tag the transaction (ArchiveTag, undo 10 s)

↳ **Alt+←** or the breadcrumb returns to the case subject at any point.

J3. Contact the customer, then close as false positive

5 Notes, uploads & forms N new note

Activity Choose action code... last used first

Result 1 Reached 2 No answer 3 Wrong number 4 Refused +4 h follow-up · capped by STR diary

Optional text Add note

A. Vance User Called customer → No answer 44 min ago · 08:09 UTC+2
Voicemail. Will retry after 12:00.
Follow-up +4 h · due 12:09 UTC+2

Jube System Diary started 22 h ago · 10:15 UTC+2
STR regulatory diary · EG profile, business days

Jube System Activations attached 22 h ago · 10:14 UTC+2
3 activations attached to C-9041

Fig. 12-composer · 1 · Note with an action code and result; follow-up diary set

↓ D

Close case C-9041 Esc

Outcome 1 True positive 2 False positive 3 Inconclusive

Typology Structuring suggested Structuring Mule

Rationale Template: structuring confirmed

Eleven cash deposits in nine days, each below the reporting threshold, totalling EGP 45,000; beneficiary first seen on the day of the largest deposit.

What will happen

- Status → Closed - STR diary stops
- Tags written to 3 activations: True positive, Structuring (model training)
- Email to fraud-ops@nilebank.example (status hook)
- Goes to M. Karim for approval (maker-checker)

preview 3c1e... · case v14 · config snapshot 2b98... Cancel Submit for approval

Decide

Suggested next step · AskJoolby 0.82

File STR

Why this suggestion

Action code A

Close D

Escalate E

More operations Ctrl K

Checklist 2/4

- ☐ Explanation viewed
- ☐ Called customer
- ☐ Verify registry
- ☐ Source of funds requested

Diaries

STR · regulatory 4d 03h

Business days · EG profile · pausable

Fig. 17-close-lightbox · 2 · Close lightbox: preview of consequences

↓ Choose outcome and typology, then pick or write the rationale

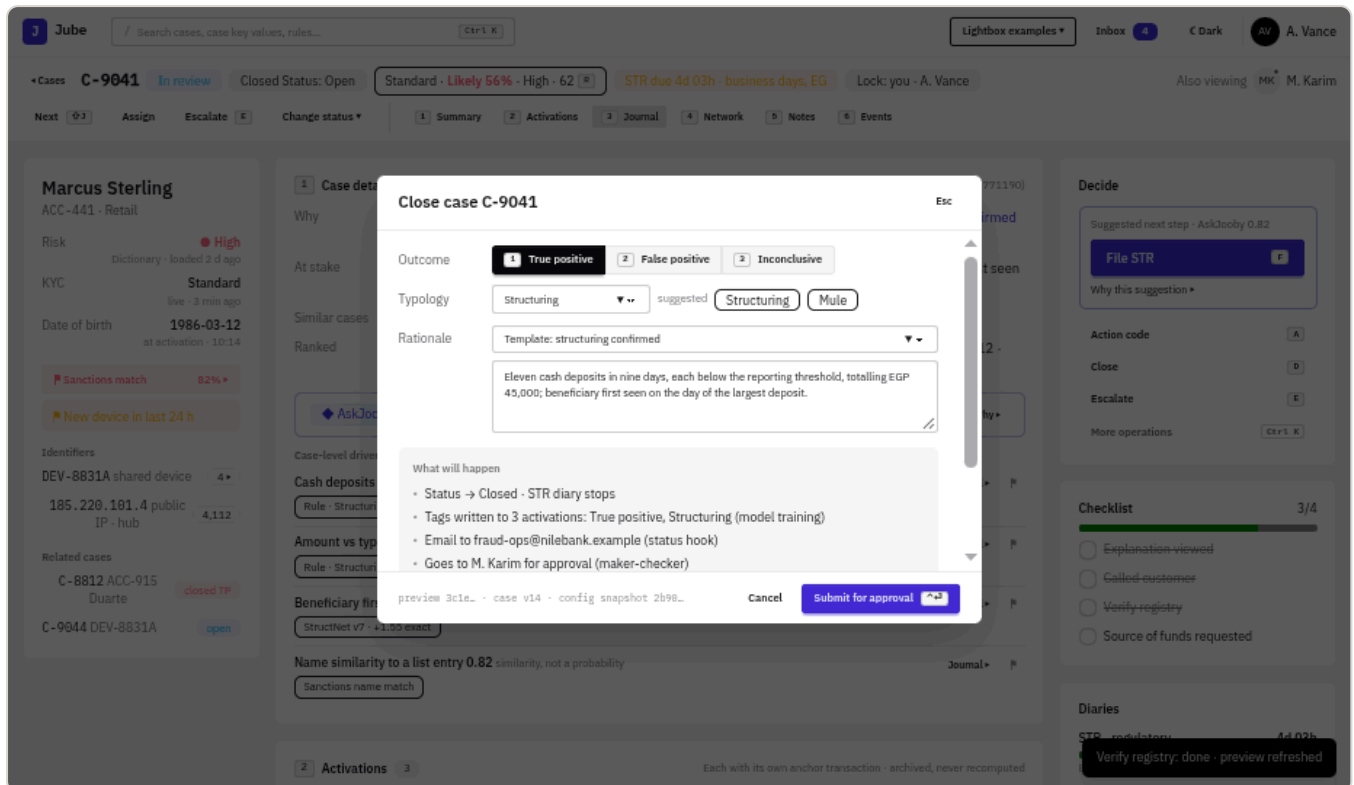


Fig. 18-close-ready · 3 · Ready to close

↓ **Ctrl+Enter**: closed, with an undo toast (hooks wait for it); **↵J** goes to the next case

↳ The case changed while the lightbox was open? The lightbox shows the change inline and waits for your acknowledgement (8.5).

J4. Write and file an STR with approval

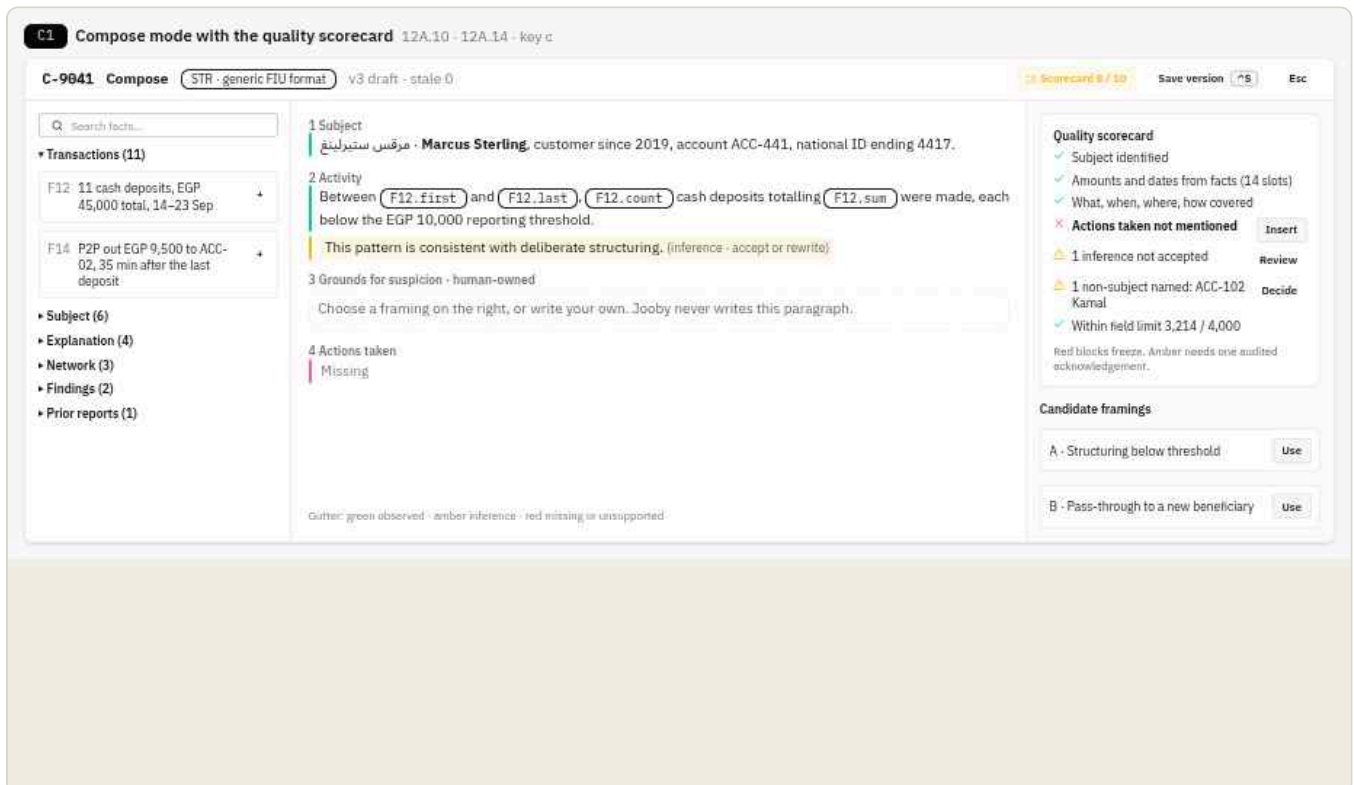


Fig. 37-C1-compose-scorecard · 1 · Compose: facts into the narrative, scorecard to green

↓ **Ctrl+S** saves the version, then **F**

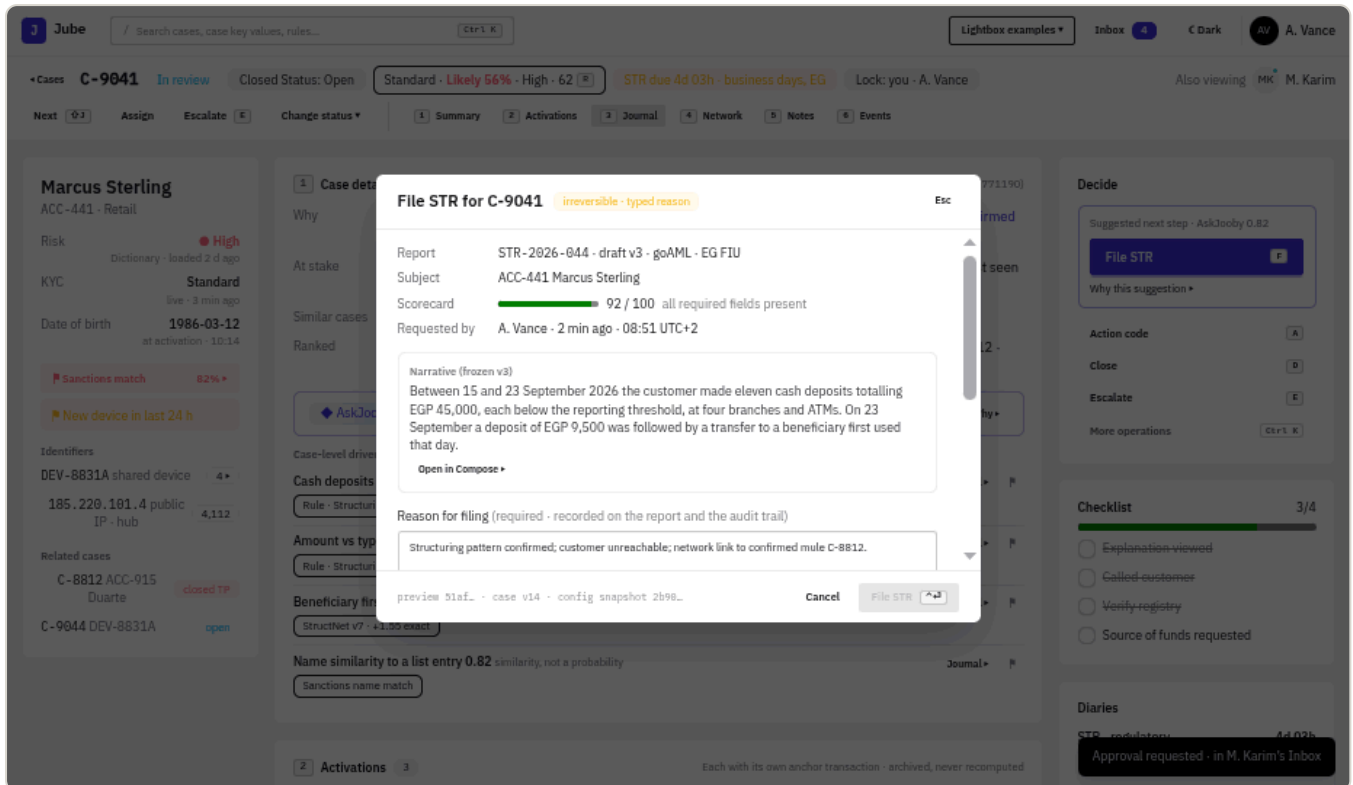


Fig. 19-file-str · 2 · File STR: blocked until approved

↓ **Request approval:** the MLRO gets an Inbox item (email if away)

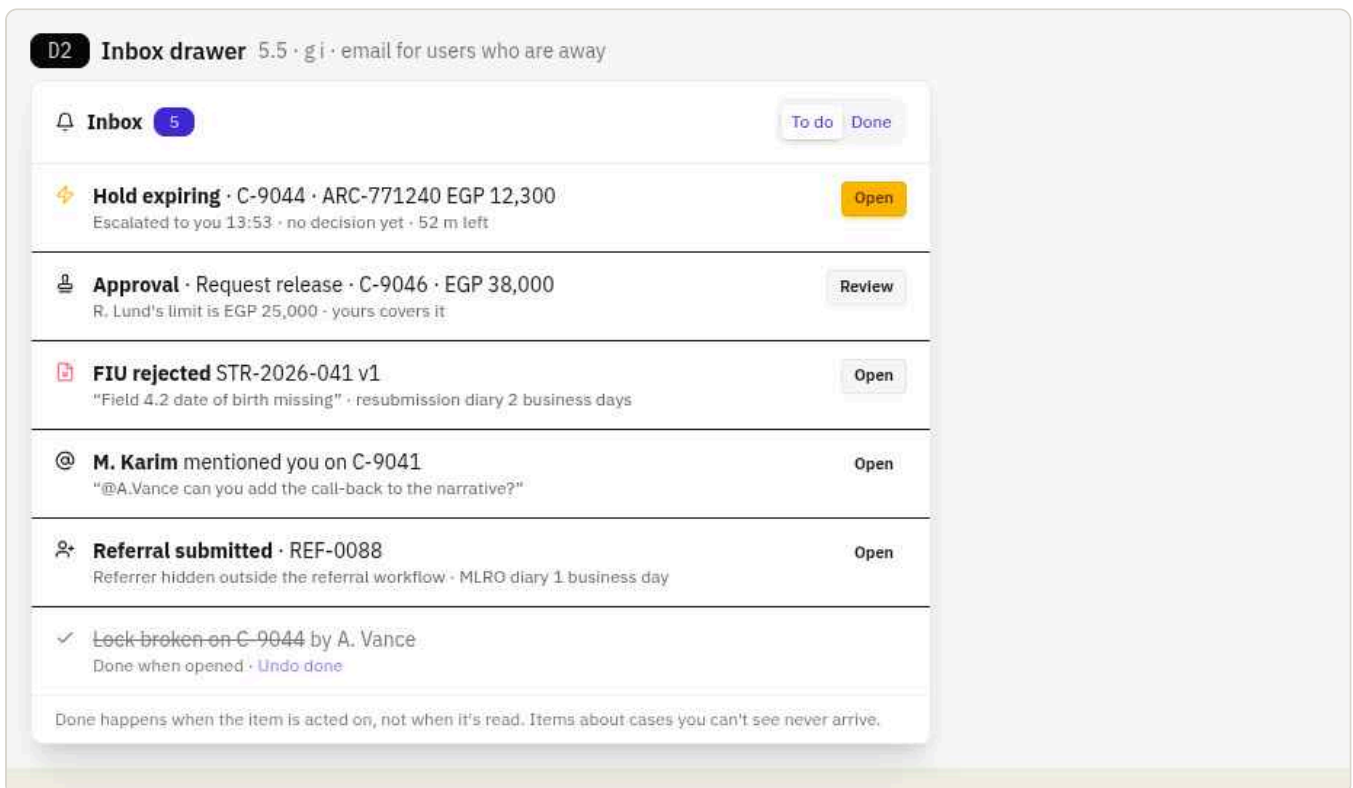


Fig. 40-D2-inbox · 3 · MLRO Inbox

↓ **Review**

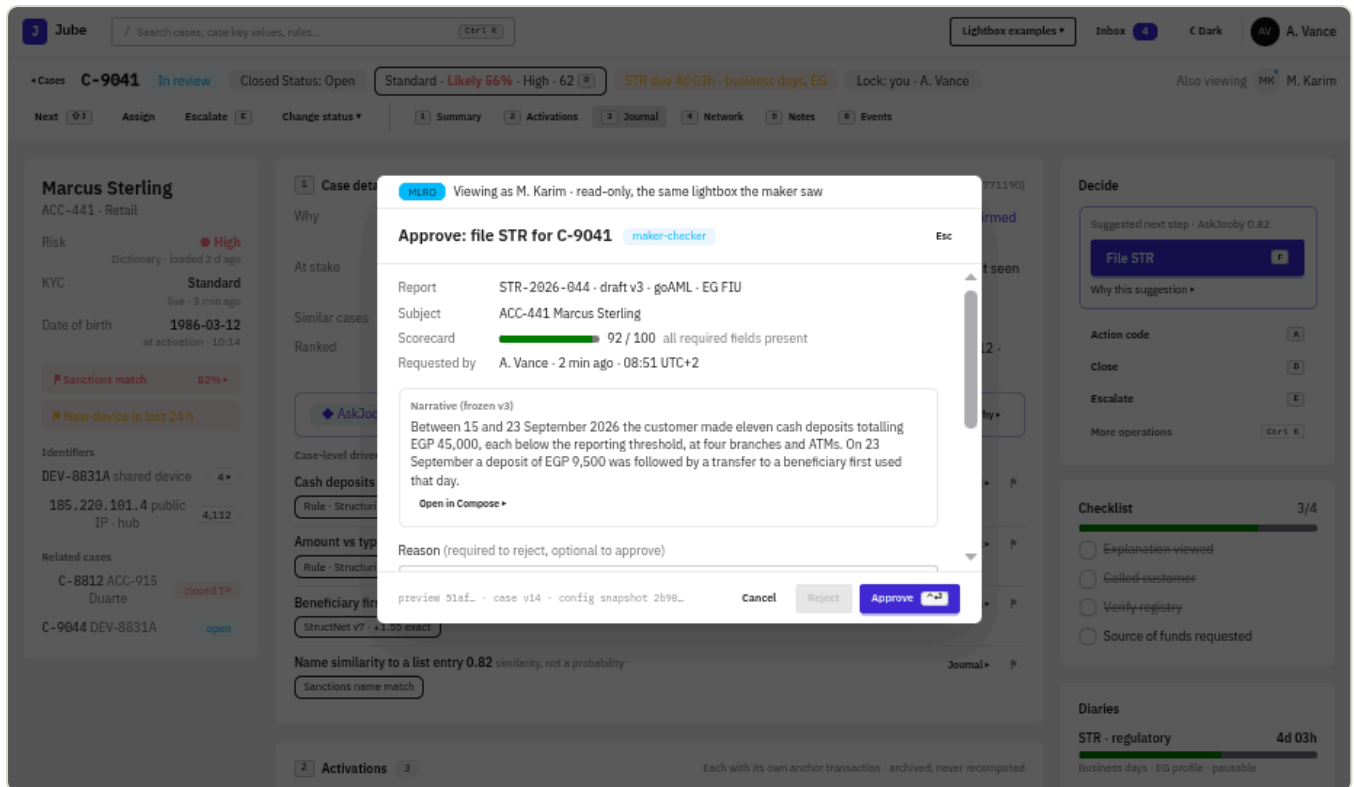


Fig. 20-approver · 4 · Approver's view

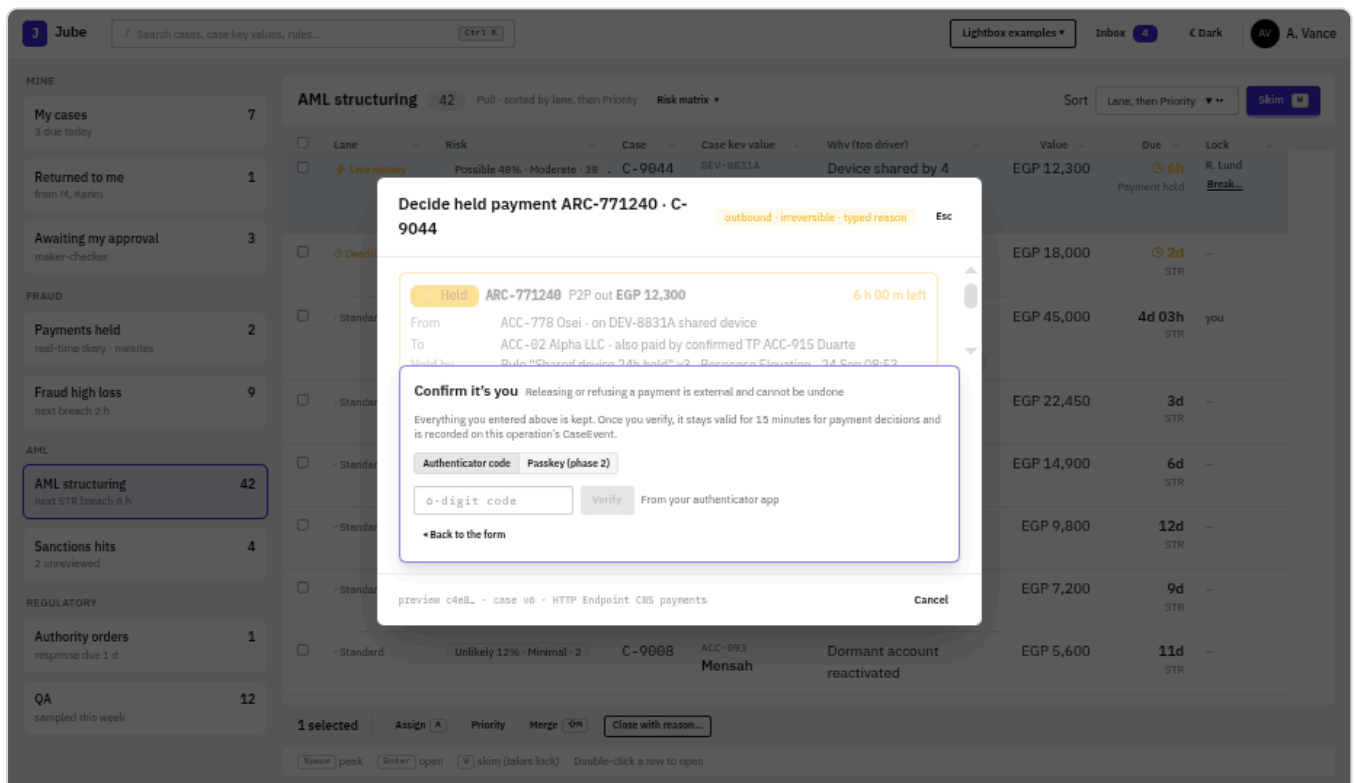
↓ **Approve** → step-up

Fig. 25-step-up-code · 5 · Step-up inside the lightbox, nothing lost

↓ The maker files (**Ctrl+Enter**)

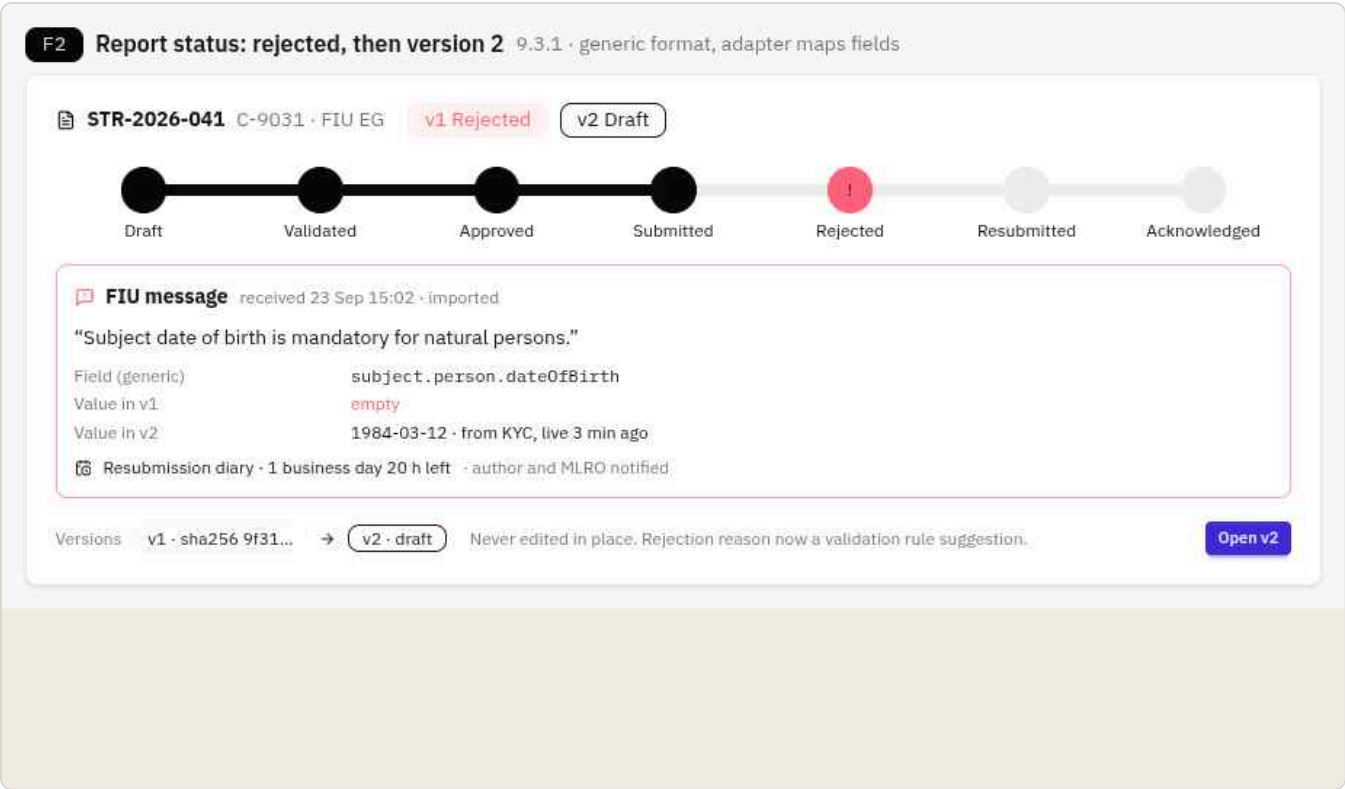


Fig. 46-F2-report-status · 6 · Report status: Submitted → Acknowledged, or Rejected → v2

↳ Rejected: the FIU's message is shown against the field, the resubmission diary starts, and a new version is created, never an edit.

J5. Decide a held payment

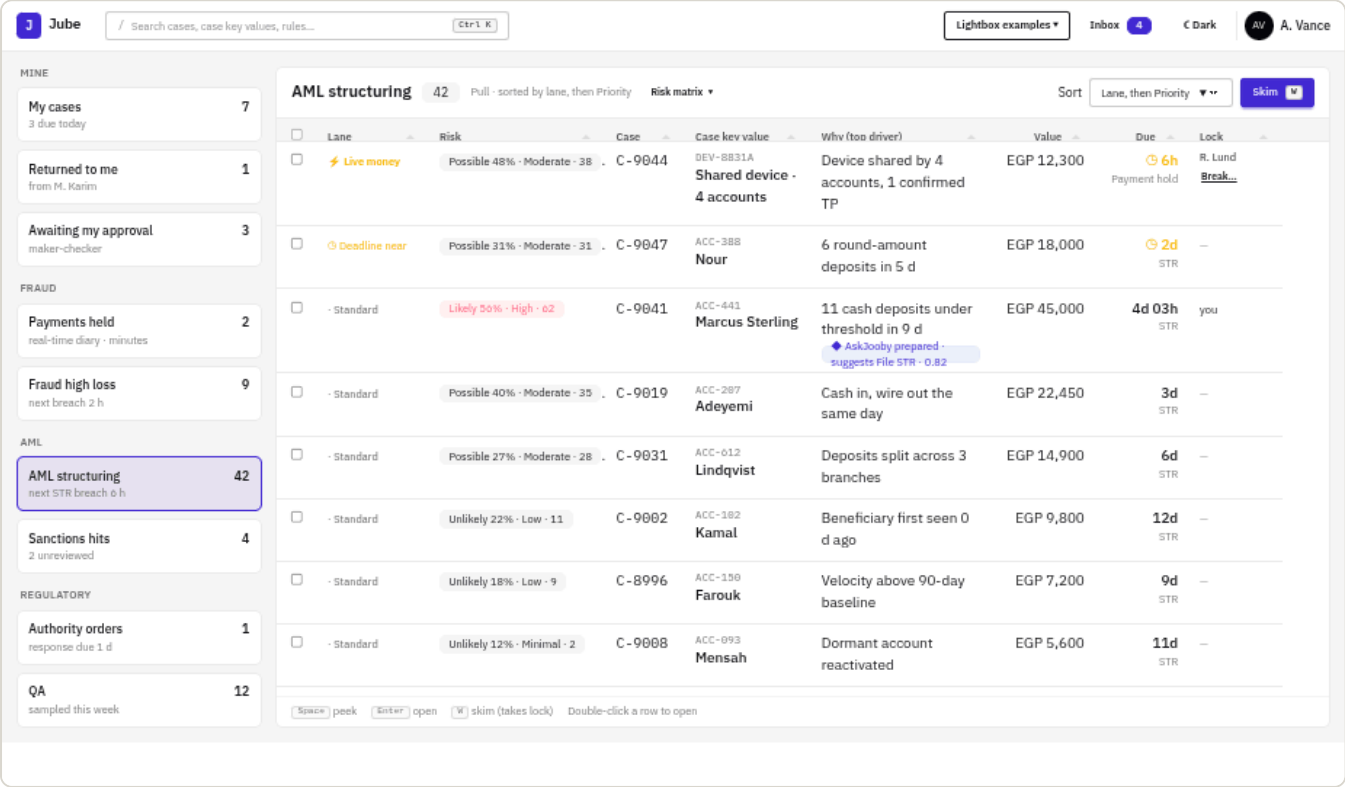


Fig. 01-cases-page · 1 · C-9044 sorts first: Live money

↓ Space

The screenshot shows the Jube AML structuring interface. On the left, there's a sidebar with categories: MINE (My cases: 7, Returned to me: 1, Awaiting my approval: 3), FRAUD (Payments held: 2, Fraud high loss: 9), AML (AML structuring: 42, Sanctions hits: 4), and REGULATORY (Authority orders: 1, QA: 12). The main area displays a table of AML structuring cases. The table has columns: Lane, Risk, Case, Case key value, and Why (too driver). The first row is highlighted, showing a case with Risk 'Possible 48% - Moderate - 38', Case 'C-9044', and Why 'Device shared by 4 accounts, 1 confirmed TP'. A lightbox is open on the right, showing details for the selected case: 'Shared device · 4 accounts'. It includes a 'Why' section, 'At stake' (EGP 12,300), 'Next diary' (6h), and a 'Decide payment...' button. Below the lightbox, there's a note about missing inputs and a 'Break lock...' button.

Fig. 22-held-payment-card · 2 · Held payment card: time left, what happens if nobody decides

↓ H

The screenshot shows the Jube AML structuring interface with a decision lightbox open. The lightbox is titled 'Decide held payment ARC-771240 - C-9044'. It contains a 'Held' status and a '6 h 00 m left' timer. The lightbox is divided into sections: 'From' (ACC-778 Osei - on DEV-8831A shared device), 'To' (ACC-02 Alpha LLC - also paid by confirmed TP ACC-915 Duarte), 'Held by' (Rule "Shared device 24h hold" v3 - Response Elevation - 24 Sep 08:53 UTC+2), 'Hold status' (Confirmed by core banking - 08:53:04 - ref CBS-H-20931), and 'If undecided' (13:53 → status "Hold expiring", escalated to S. Okoro (email + Inbox); re-escalated every 30 min - pack maximum 14:53, then the pack's default action). The 'Your limit' section states: 'You can release up to EGP 25,000 (set on your user). Above that, Release becomes "Request release" for a second person.' The 'Decision' section has three options: 'Release', 'Refuse (return to sender)', and 'Extend hold'. The 'Evidence' section shows 'Called customer → Reached - 08:00 - A. Vance'. The 'Reason' section shows 'Beneficiary ACC-02 received funds from confirmed rule ACC-915; payer reached and could not explain the payee.' There's a checkbox for 'Also block beneficiary ACC-02 Alpha LLC (adds it to List "Blocked beneficiaries")'. The 'What will happen' section lists: 'Core banking: refuse ARC-771240 and return EGP 12,300 to ACC-778 Osei (HTTP Endpoint "CBS payments", idempotency key op-7f21...)', 'List "Blocked beneficiaries" gains ACC-02 Alpha LLC - future payments to it are held in real time by Response Elevation', 'Hold diary stops - C-9044 leaves the Live money lane for Standard', 'Customer notification "Payment returned" is tipping-off restricted: held until the MLRO clears it', and 'System note and CaseEvent written - the decision cites case risk assessment #6'. At the bottom, there's a 'Cancel' button and a 'Refuse payment' button.

Fig. 23-payment-lightbox · 3 · Decision lightbox: 1 Release · 2 Refuse · 3 Extend

↓ Pick a decision and enter the reason, then **Ctrl+Enter** (Release and Refuse need step-up)

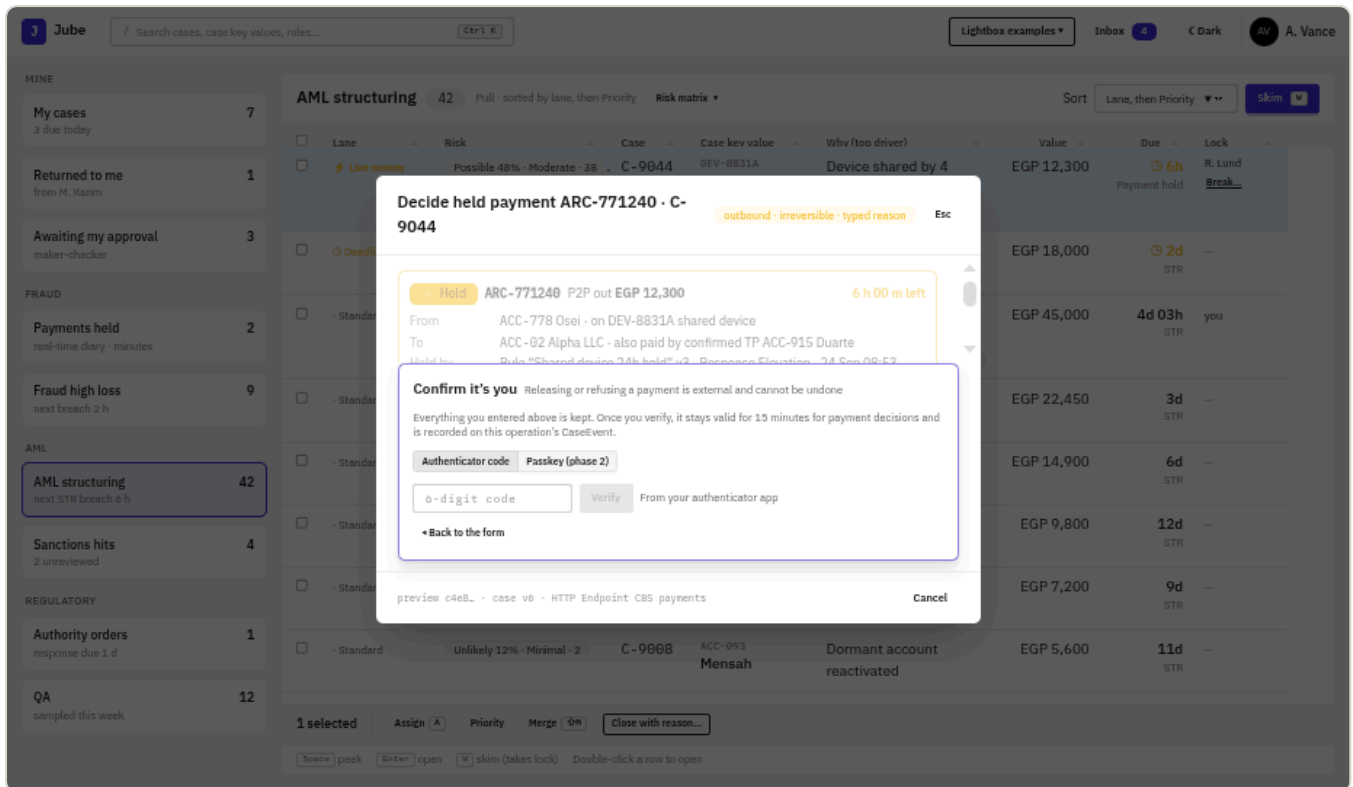


Fig. 25-step-up-code · 4 · Step-up

↓ Verify

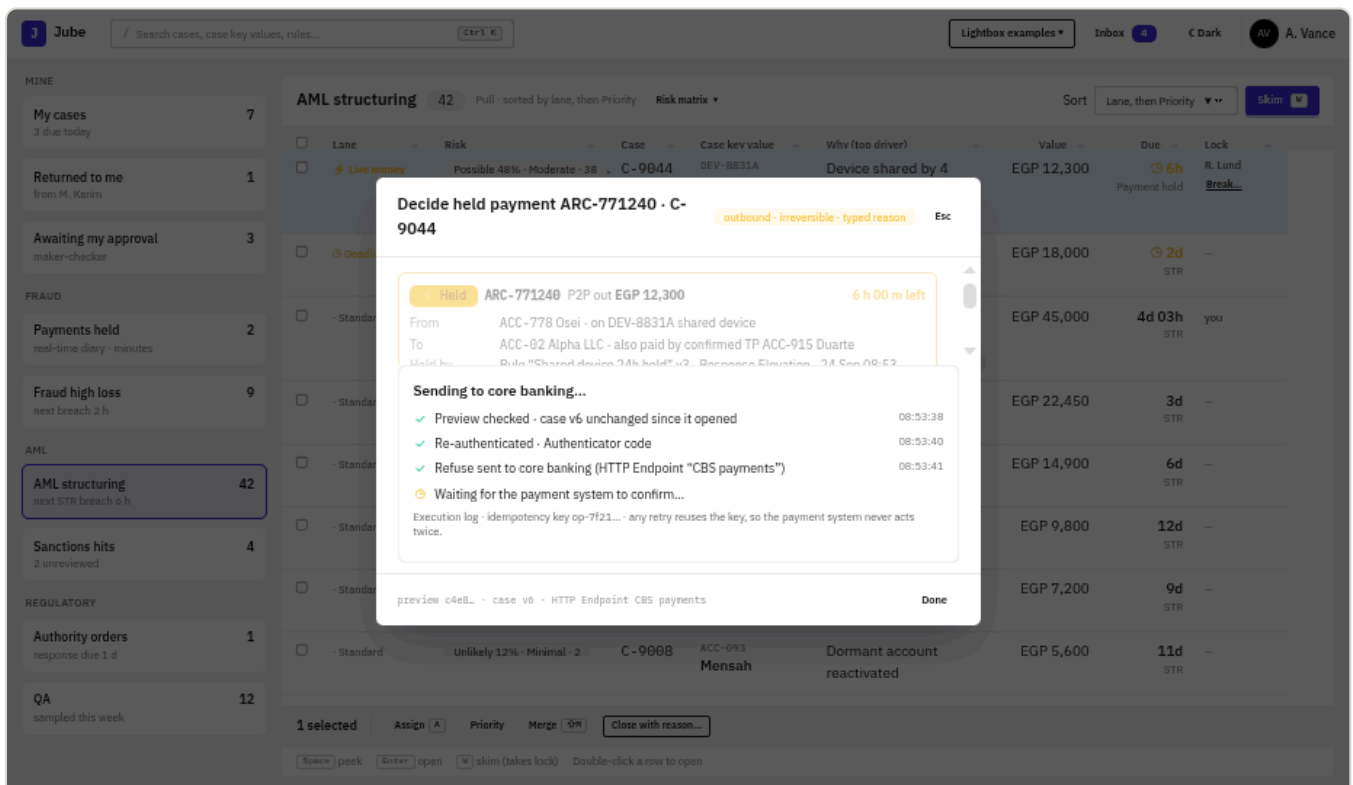


Fig. 26-payment-sending · 5 · Sending to core banking

↓ Synchronous answer

The screenshot shows the Jube v2 interface with a modal titled "Decide held payment ARC-771240 · C-9044". The modal displays a "Refuse confirmed" status with a list of actions and timestamps:

- ✓ Preview checked · case v6 unchanged since it opened (08:53:38)
- ✓ Re-authenticated · Authenticator code (08:53:40)
- ✓ Refuse sent to core banking (HTTP Endpoint "CBS payments") (08:53:41)
- ✓ Confirmed by core banking · ref CBS-R-55107 (08:53:43)
- ✓ Hold diary stopped · lane Live money → Standard (08:53:43)
- ✓ System note and CaseEvent written (08:53:43)

Below the list, it states: "Execution log · idempotency key op-7f21... · any retry reuses the key, so the payment system never acts twice." and "Prototype: replay as a timeout". The modal also shows a "preview c4e8... · case v6 · HTTP Endpoint CBS payments" and a "Done" button.

The background interface shows a table of cases with columns: Lane, Risk, Case, Case key value, Why (too driver), Value, Due, and Lock. The table is sorted by Lane, then Priority. The modal is currently open over the case ARC-771240.

Fig. 27-payment-confirmed · 6a · Confirmed: diary stops, lane → Standard

The screenshot shows the Jube v2 interface with a modal titled "Decide held payment ARC-771240 · C-9044". The modal displays a "Outcome unknown" status with a list of actions and timestamps:

- ✓ Preview checked · case v6 unchanged since it opened (08:53:38)
- ✓ Re-authenticated · Authenticator code (08:53:40)
- ✓ Refuse sent to core banking (HTTP Endpoint "CBS payments") (08:53:41)
- ! No answer within 30 s, so the outcome is unknown. A retry sends the same request with the same idempotency key, so the listener acts at most once. The hold diary keeps running and the case stays in Live money. (08:54:11)

Below the list, it states: "Execution log · idempotency key op-7f21... · any retry reuses the key, so the payment system never acts twice." and a "Retry safely (same key)" button. The modal also shows a "preview c4e8... · case v6 · HTTP Endpoint CBS payments" and a "Done" button.

The background interface shows a table of cases with columns: Lane, Risk, Case, Case key value, Why (too driver), Value, Due, and Lock. The table is sorted by Lane, then Priority. The modal is currently open over the case ARC-771240.

Fig. 28-payment-timeout · 6b · Outcome unknown: Retry safely with the same key

↳ **Above your limit:** Release becomes Request release, and a second person approves it:

F4 Approver's view of Request release H3 · above the maker's limit

Approve release · C-9046

maker-checker · step-up

Payment	ARC-771301 · P2P out EGP 38,000 · ACC-310 Nasser → ACC-77 Delta Imports
Requested by	R. Lund · limit EGP 25,000 · 13:12
Their reason	"Customer confirmed on recorded call-back; invoice INV-5521 matches."
Evidence	Called customer → Reached · 13:05 · upload INV-5521.pdf (sha256 a1c4...)
Your limit	EGP 100,000 · covers this
Hold left	2 h 40 m

Reason (required to reject)

On approve: step-up (authenticator code), then Release is sent to core banking under your name as approver and R. Lund's as maker.

Cancel

Reject

Approve release

Fig. 48-F4-approve-release · Approver's view of Request release

↳ **Nobody decides:** one hour before expiry the status becomes Hold expiring, and the supervisor is escalated by email and Inbox:

F3 "Hold expiring" escalation email H1 · no customer data beyond the case id

FromCase Management <cases@nilecommerce.example>

ToS. Okoro

SubjectAction needed: payment hold on C-9044 ends in 1 hour

A held payment on case **C-9044** has no decision and its hold ends at **14:53 (Cairo)**. It has been escalated to you.

Assigned to	A. Vance (no action since 08:55)
Amount	EGP 12,300
If undecided	re-escalated every 30 min; at the pack maximum the pack default applies

Open the case

The link opens C-9044 at the held payment after you sign in. Names and account details are not included in email.

Fig. 47-F3-hold-email · Hold expiring email

J6. Supervise the team

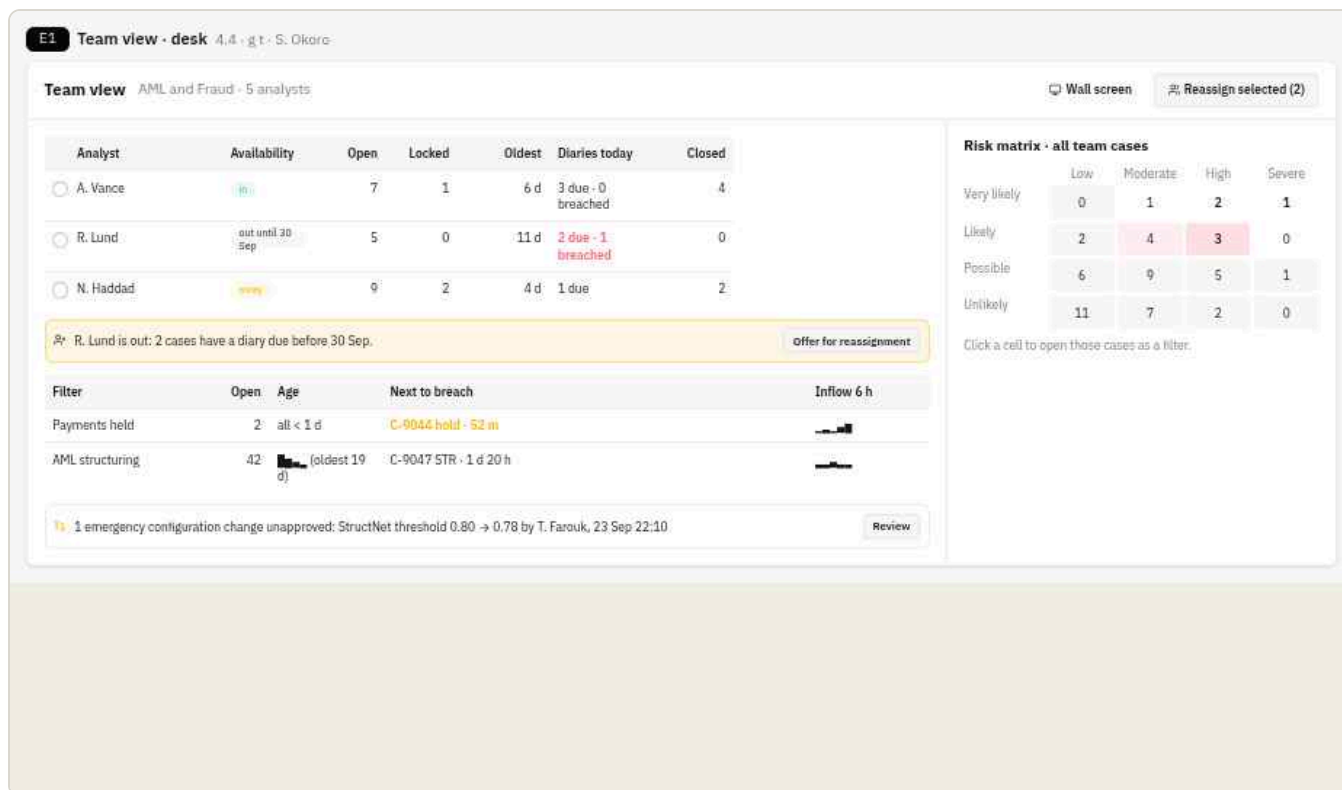


Fig. 43-E1-team-view · 1 · Team view: people, filters, next to breach, risk matrix

↓ Select R. Lund's cases → **Reassign selected**

↳ A case is locked by someone who is away → **Break lock** (typed reason, step-up):

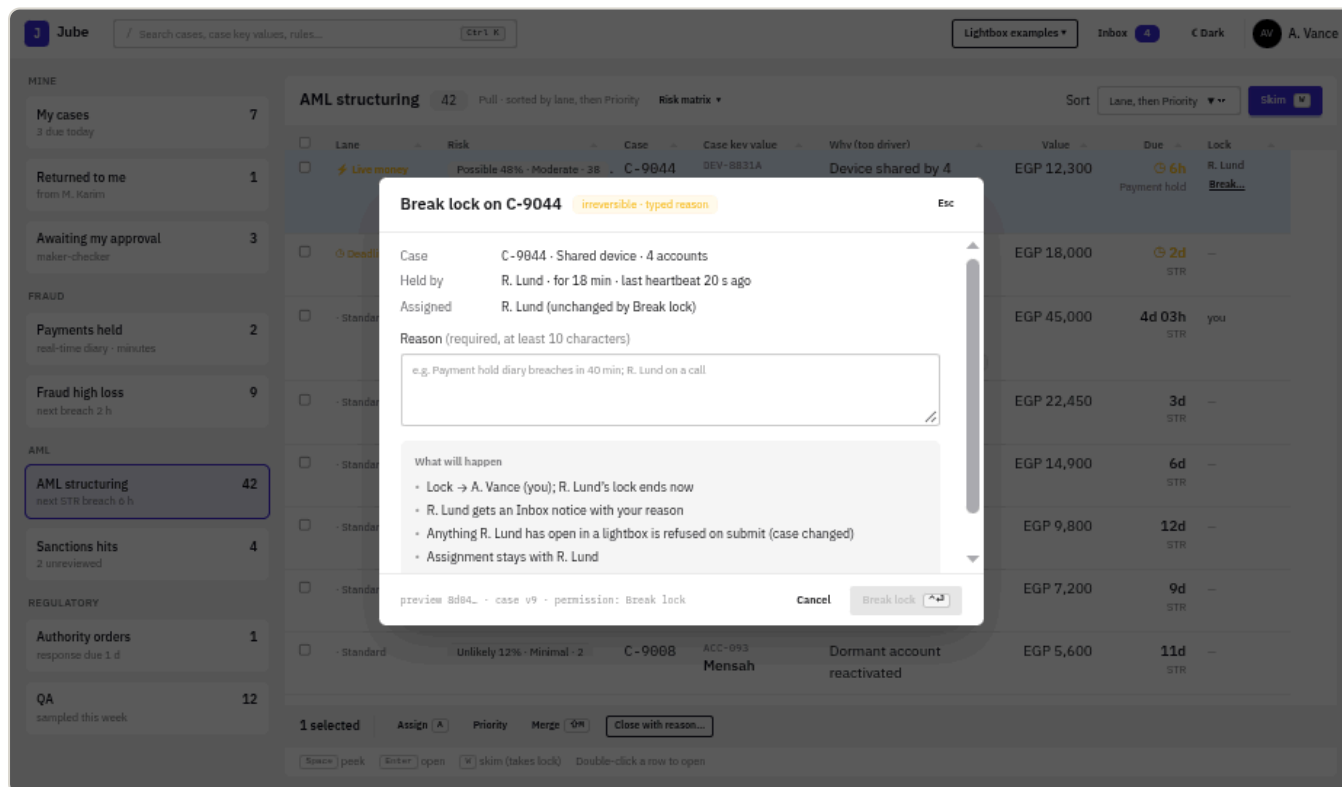


Fig. 21-break-lock · Break lock

↳ On the wall screen, the same data at a glance:

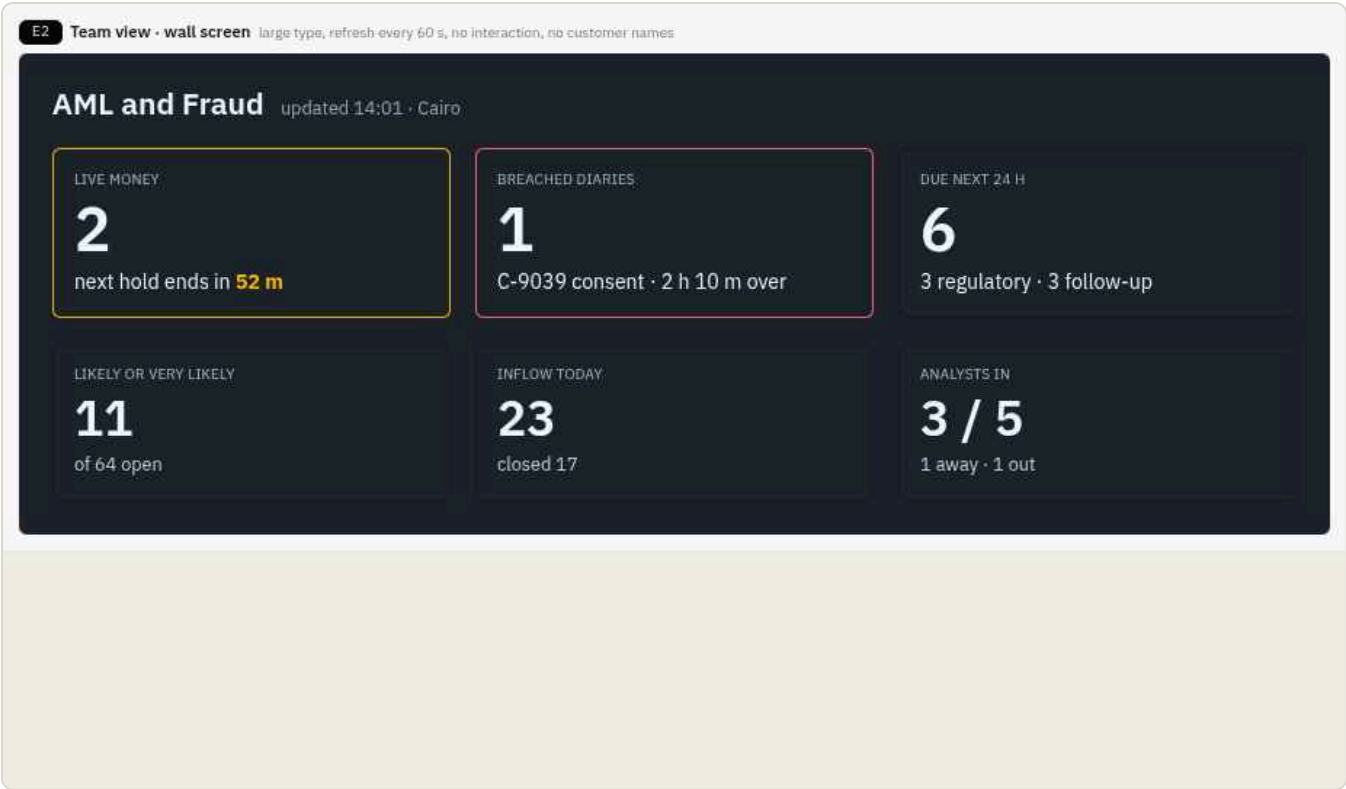


Fig. 44-E2-team-wall · Wall screen

J7. A staff referral reaches the MLRO

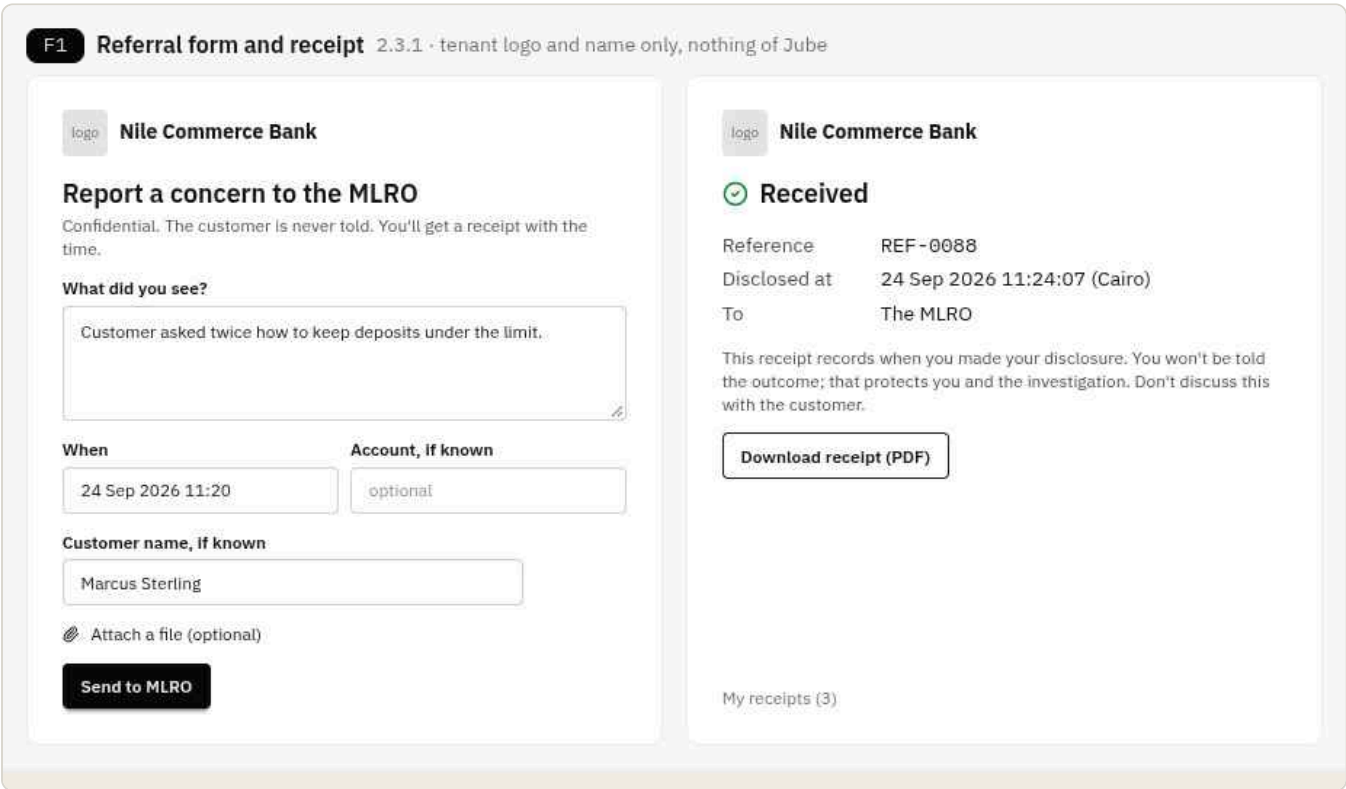


Fig. 45-F1-referral · 1 · Referral form, then receipt with the time of disclosure

↓ **Send to MLRO:** a referral case is created with the MLRO's regulatory diary

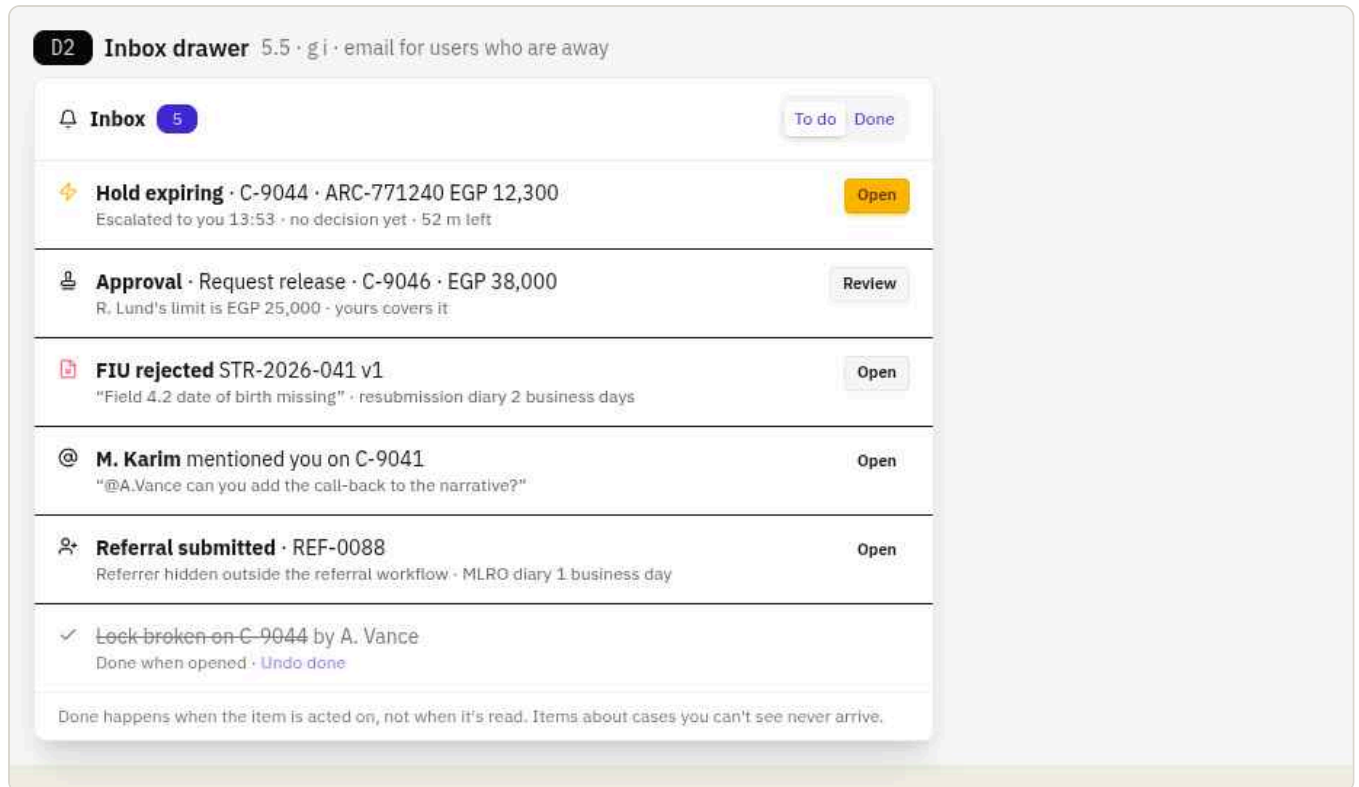


Fig. 40-D2-inbox · 2 · MLRO Inbox: "Referral submitted"

↓ **Open** → link it to an existing case, open an investigation, or close it with a reason

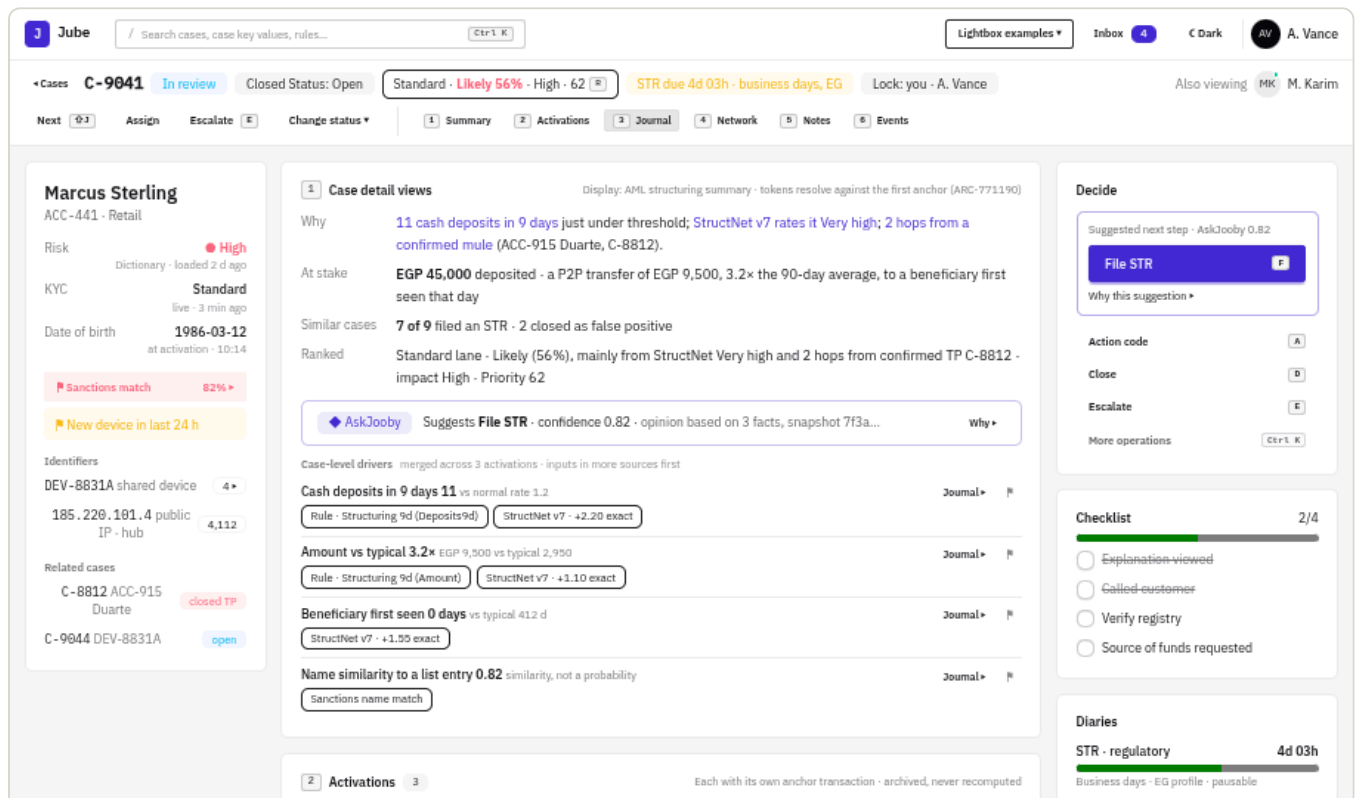


Fig. 04-case-page · 3 · Case page (the referrer is visible only to the referral workflow)

J8. First-time step-up

F5

Step-up enrolment and recovery codes

H6 · user settings · authenticator first, passkey in phase 2

Authenticator app

step 2 of 3

QR code

Scan with any authenticator app (Microsoft, Google, 1Password...).

Can't scan? Key: JBUS 4Q2X 7KDP

Enter the 6-digit code to confirm

482 913

Confirm

Passkey · available in phase 2

No SMS option. If your tenant signs in through its own identity provider, step-up is a fresh sign-in there instead.

Recovery codes

step 3 of 3

Each code works once, if you lose your phone. Store them somewhere safe; Jube shows them only now.

7F3K-92QD

M8XP-41LA

Q2ZR-6T0N

H5WB-83JC

D9EV-27MU

K4RS-50GY

Download

Copy

☐ I've stored these codes

Finish

Resetting another user's step-up is an admin operation with its own step-up and CaseEvent-style audit.

Fig. 49-F5-step-up-enrolment · 1 · Enrol an authenticator, store recovery codes

↓ The first protected operation (File, Approve, Break lock, Release, Refuse)

Jube

Search cases, case key values, rules...

Ctrl K

Lightbox examples

Inbox 4

Dark

AV A. Vance

MINE

My cases

3 due today

7

Returned to me

from M. Kasim

1

Awaiting my approval

maker-checker

3

FRAUD

Payments held

real-time diary · minutes

2

Fraud high loss

next breach 2 h

9

AML

AML structuring

next STR breach 6 h

42

Sanctions hits

2 unreviewed

4

REGULATORY

Authority orders

response due 1 d

1

QA

sampled this week

12

AML structuring

42

Pull - sorted by lane, then Priority

Risk matrix

Lane

Risk

Case

Case key value

Who (top driver)

Value

Due

Lock

Live money

Possible 48% · Moderate · 38

C-9844

DEV-8831A

Device shared by 4

EGP 12,300

6h

R. Lund

Dead

EGP 18,000

2d

STR

EGP 45,000

4d 03h

you

STR

EGP 22,450

3d

STR

EGP 14,900

6d

STR

EGP 9,800

12d

STR

EGP 7,200

9d

STR

EGP 5,600

11d

STR

1 selected

Assign A

Priority

Merge OR

Close with reason...

Space peek

Enter open

W skim (takes lock)

Double-click a row to open

Decide held payment ARC-771240 · C-9044

outbound · irreversible · typed reason

Esc

Held

ARC-771240

P2P out EGP 12,300

6 h 00 m left

From

ACC-778 Osei · on DEV-8831A shared device

To

ACC-82 Alpha LLC · also paid by confirmed TP ACC-915 Duarte

Held by

Rule "Shared device 24h hold" v2 · Reference CaseEvent 24 Sep 08:52

Confirm it's you

Releasing or refusing a payment is external and cannot be undone

Everything you entered above is kept. Once you verify, it stays valid for 15 minutes for payment decisions and is recorded on this operation's CaseEvent.

Authenticator code

Passkey (phase 2)

6-digit code

Verify

From your authenticator app

Back to the form

preview c4e8... · case v6 · HTTP Endpoint CBS payments

Cancel

Fig. 25-step-up-code · 2 · Step-up inside the lightbox; valid 5 min (payment decisions: bound to that decision)

PART III

The screens in detail

Every screen in the order a user meets it. Each section opens with what it is for, then figures and an interaction table: what each click, key or search does, the call it makes, and its status.

6. Finding work: the Cases page

Where every working day starts: the cases a user can work, ordered so that live money and deadlines come before risk, with a preview that saves opening each case.

6.1 List, lanes and risk chips

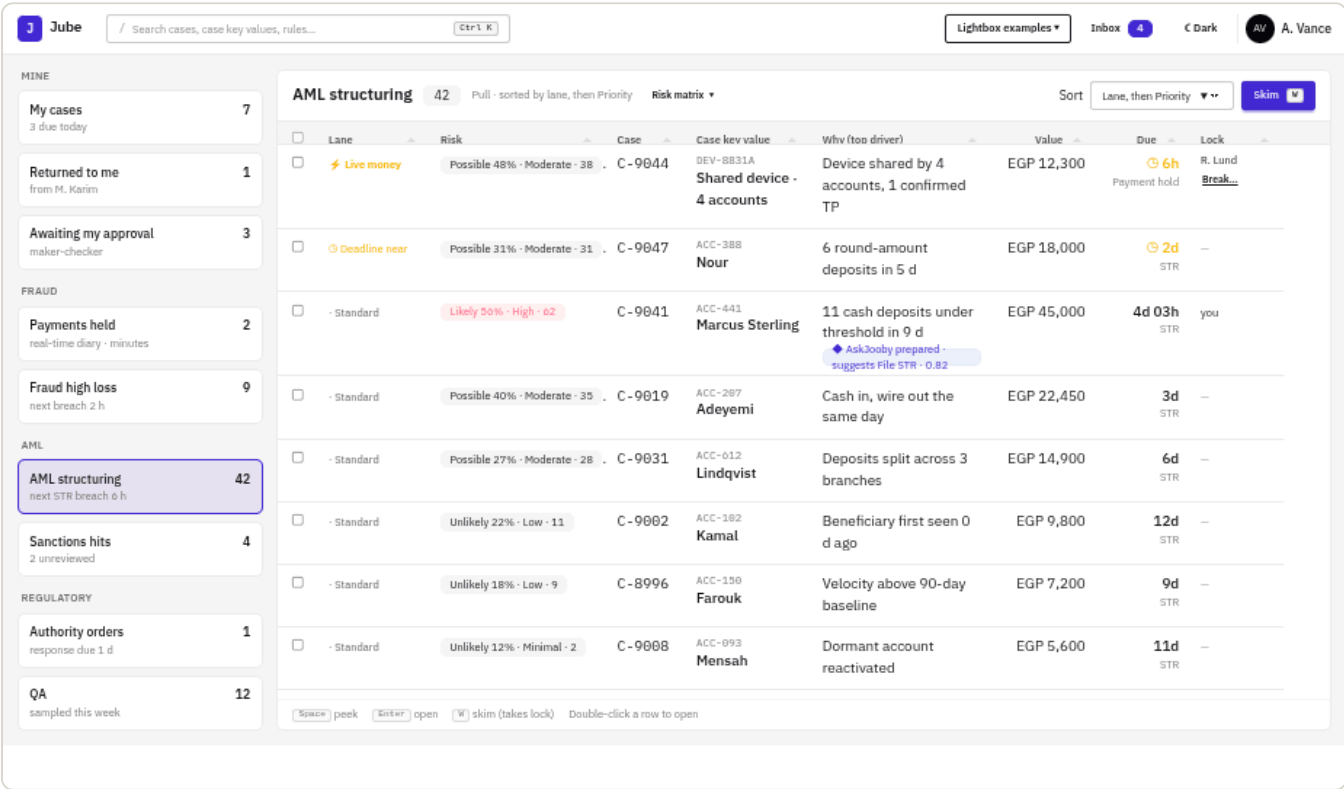


Fig. 01-cases-page · Cases page

Filter hub cards on the left; the Tabulator list ordered by **lane, then Priority**. C-9044 is first (⚡ Live money: a payment hold decides in 6 h), then C-9047 (⌚ Deadline near), then the Standard lane by Priority. The "Why" column shows the top case-level driver, with the AskJooby-prepared marker on C-9041.

Interaction	Does	Call	Status
Page load	Filter cards with counts and meta line	GET /api/CaseWorkflowFilter + /Counts (CP-01)	Exists + New
Click a filter card	Load its cases, with lane, likelihood, band, impact, Priority, Why, AskJooby flag, due diary, lock, value	GET /api/CaseSearch? filterId=&sort=lane,priority (CP-02)	Extend
Hover a risk chip	Lane, likelihood, impact, urgency, Priority formula	GET /api/Case/{id}/Risk (CP-17)	New
Sort select	Server sort (lane then Priority by default)	CP-03	Extend
W Skim	Lock the top case in lane order, assign if unassigned, prefetch next	POST /api/Case/Skim (CP-09)	Extend
Lock "Break..."	Break lock lightbox	Op: BreakLock (CP-10)	New
Bulk bar	Assign · Priority (override) · Merge · Close with reason	Op: Assign / ChangePriority / Merge / Close (CP-11–14)	New

6.2 Risk matrix

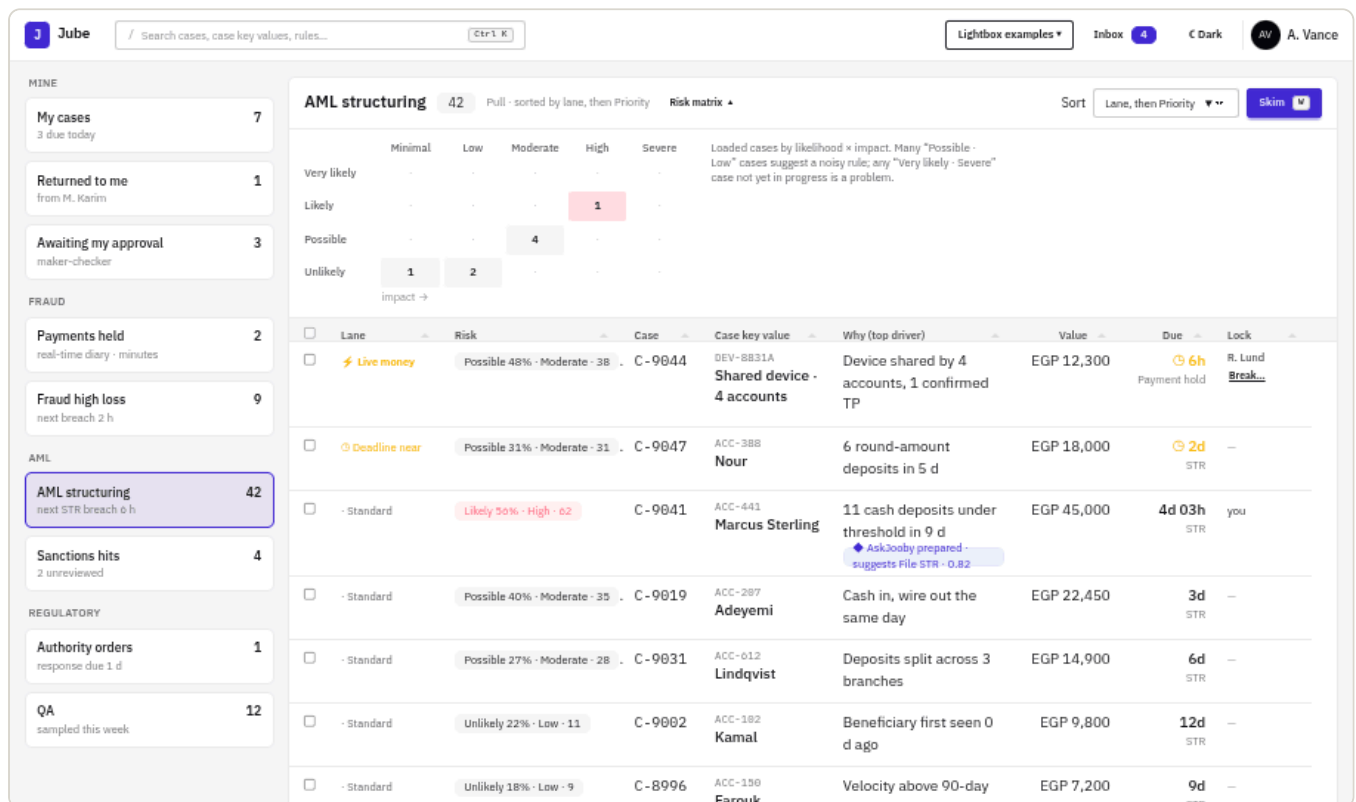


Fig. 02-risk-matrix · Risk matrix

Likelihood (rows) × impact (columns) for the loaded cases; the likely-and-high cells are tinted. On the Team view it covers the whole filter.

Interaction	Does	Call	Status
"Risk matrix ▼"	Counts per likelihood band × impact band for the filter	Proposed: GET /api/CaseWorkflowFilter/{id}/RiskMatrix (not yet in 22; proposed CP-18)	New

6.3 Peek (Space)

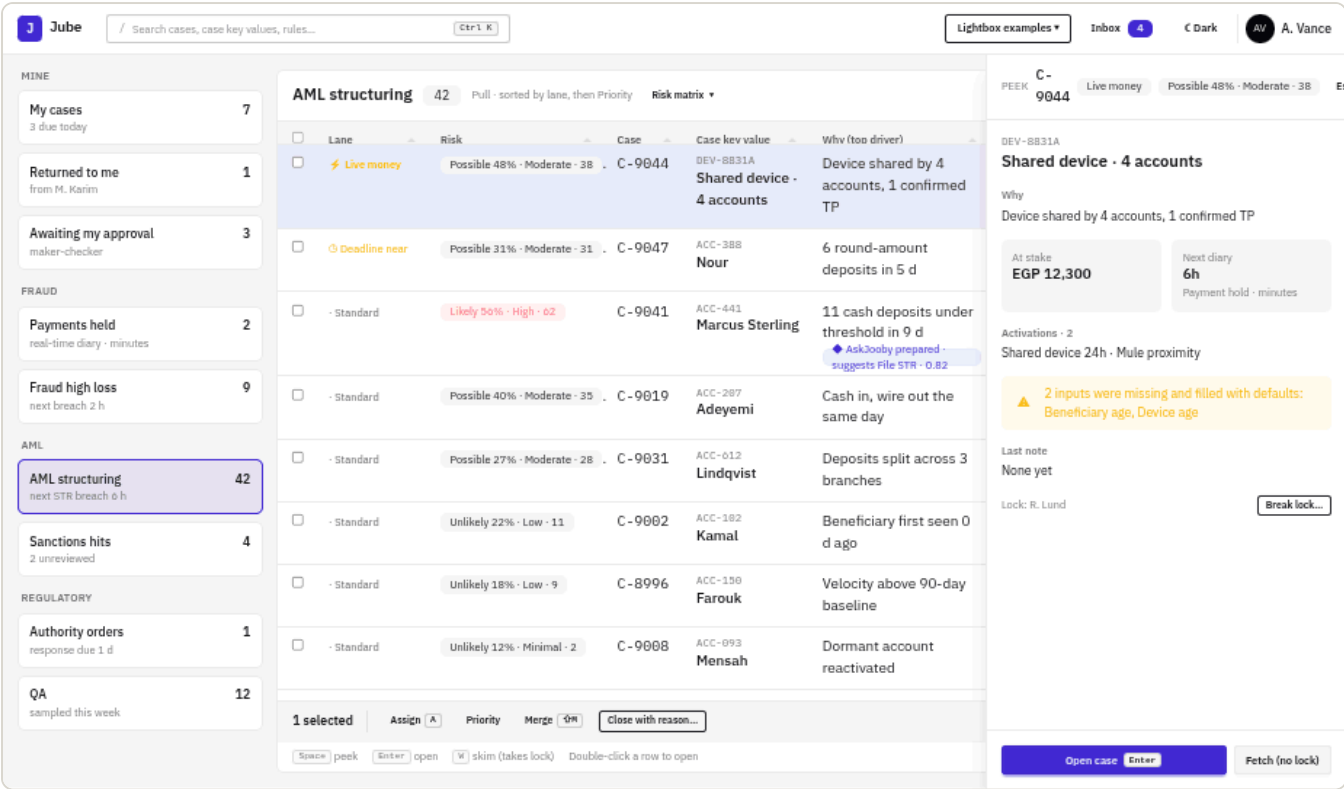


Fig. 03-peek · Peek

Read-only drawer without taking the lock. For C-9044 it shows the data-quality warning: two inputs were missing and filled with defaults.

Interaction	Does	Call	Status
Space	Summary, lane and risk chip, Activations, last note, diaries, health, lock	GET /api/Case/{id}/Summary (CP-06)	New
Open case (Enter)	Open without locking (Fetch)	CH-00	New

7. Supervising: Team view, Inbox and the command palette

What supervisors and the MLRO use to see the whole team's work and the items waiting for them, and what everyone uses to move anywhere by keyboard.

7.1 Team view: desk and wall

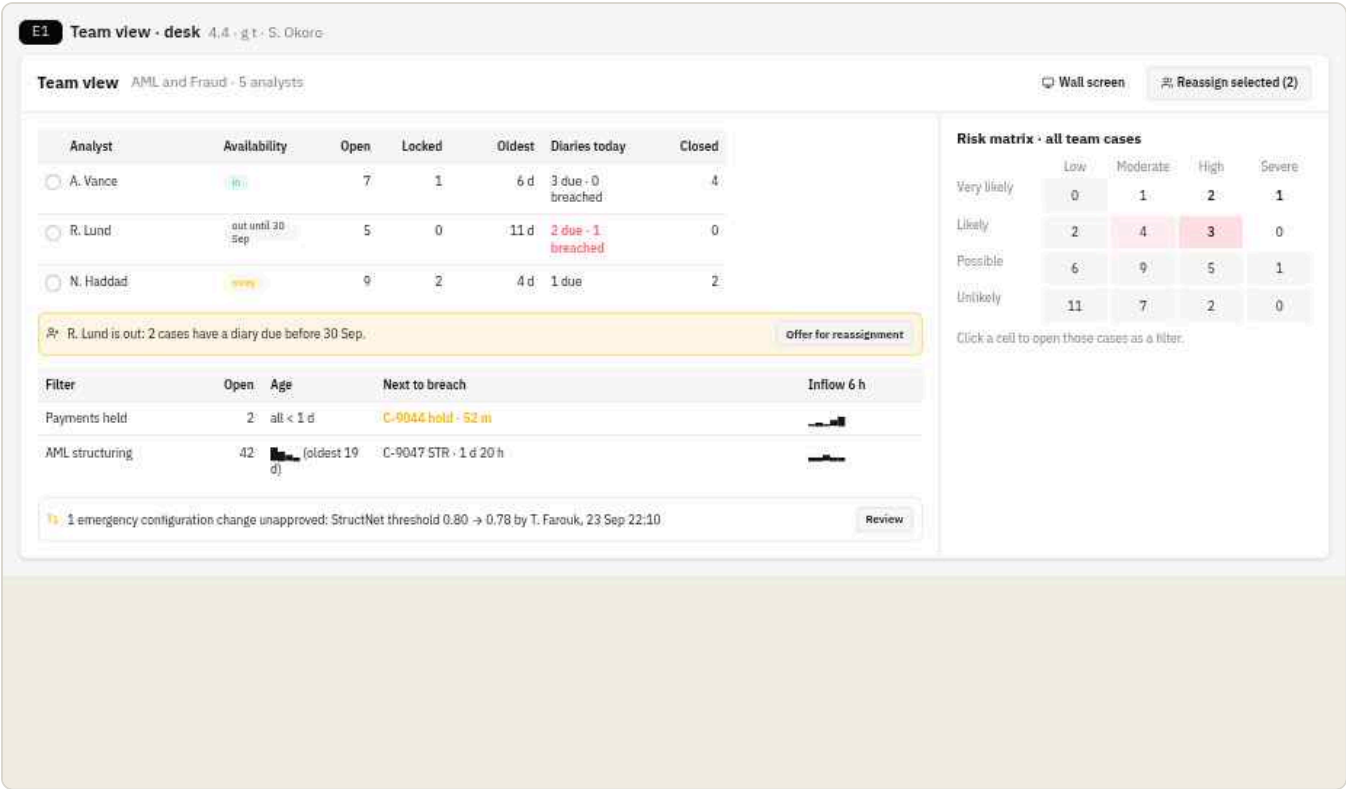


Fig. 43-E1-team-view · Team view desk

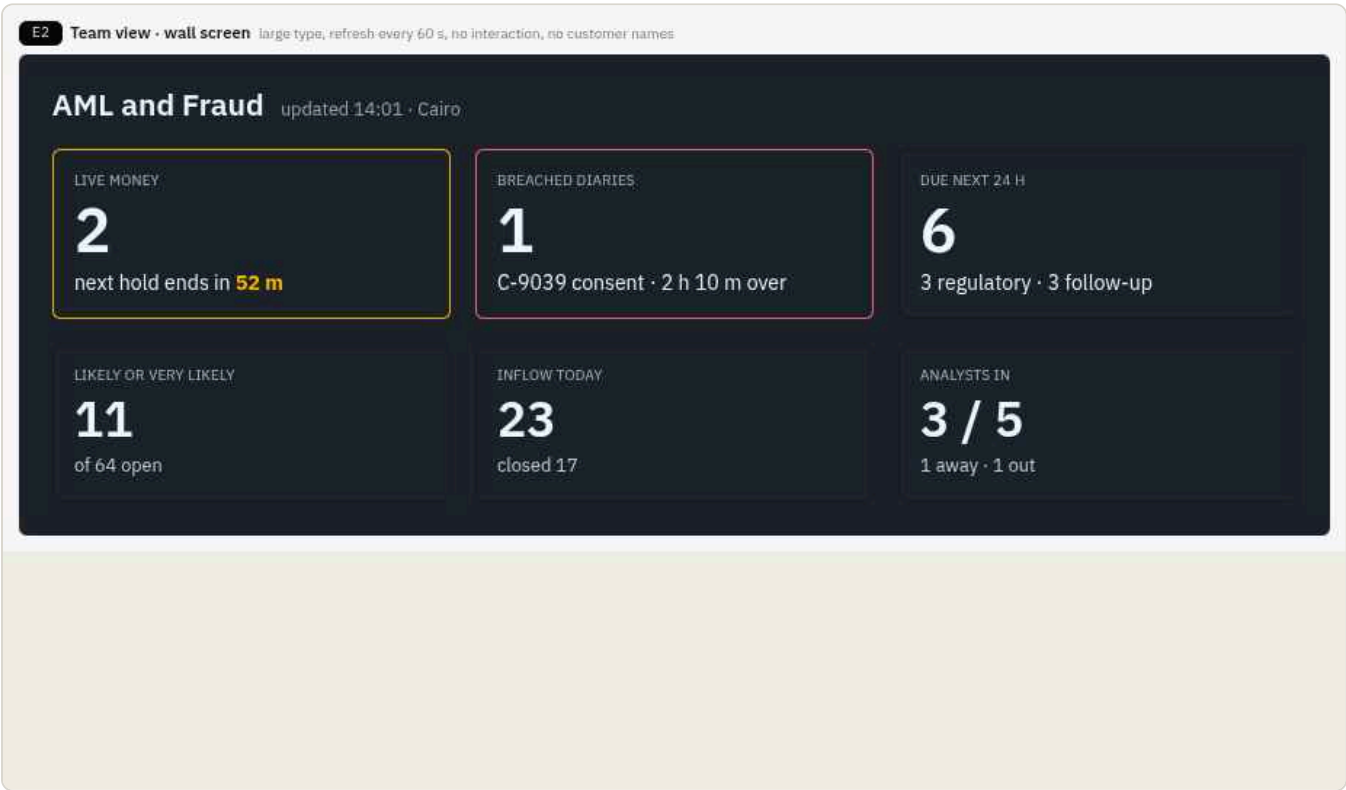


Fig. 44-E2-team-wall · Team view wall screen

- **Desk view:**
 - per-analyst table with availability;
 - absence offer ("R. Lund is out: 2 cases due");
 - per-filter panel with the next case to breach;

- unapproved emergency changes;
- the risk matrix (click a cell to open those cases as a filter).
- **Wall screen:** large type, refreshed every 60 s, no interaction and no customer names.

7.2 Inbox

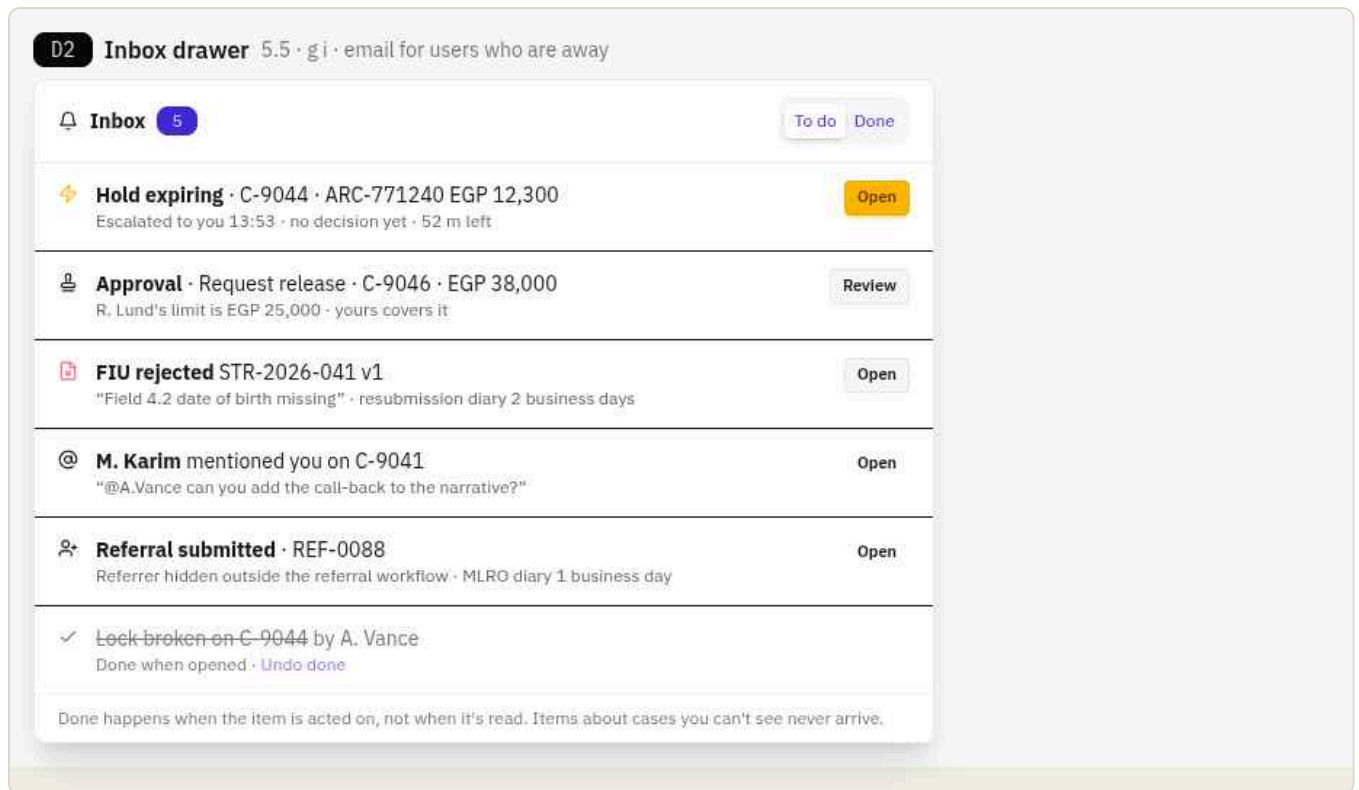


Fig. 40-D2-inbox · Inbox drawer

An item is marked done when it's acted on, not when it's read. Anyone who is away gets it by email instead (F3).

7.3 Command palette and shortcut sheet

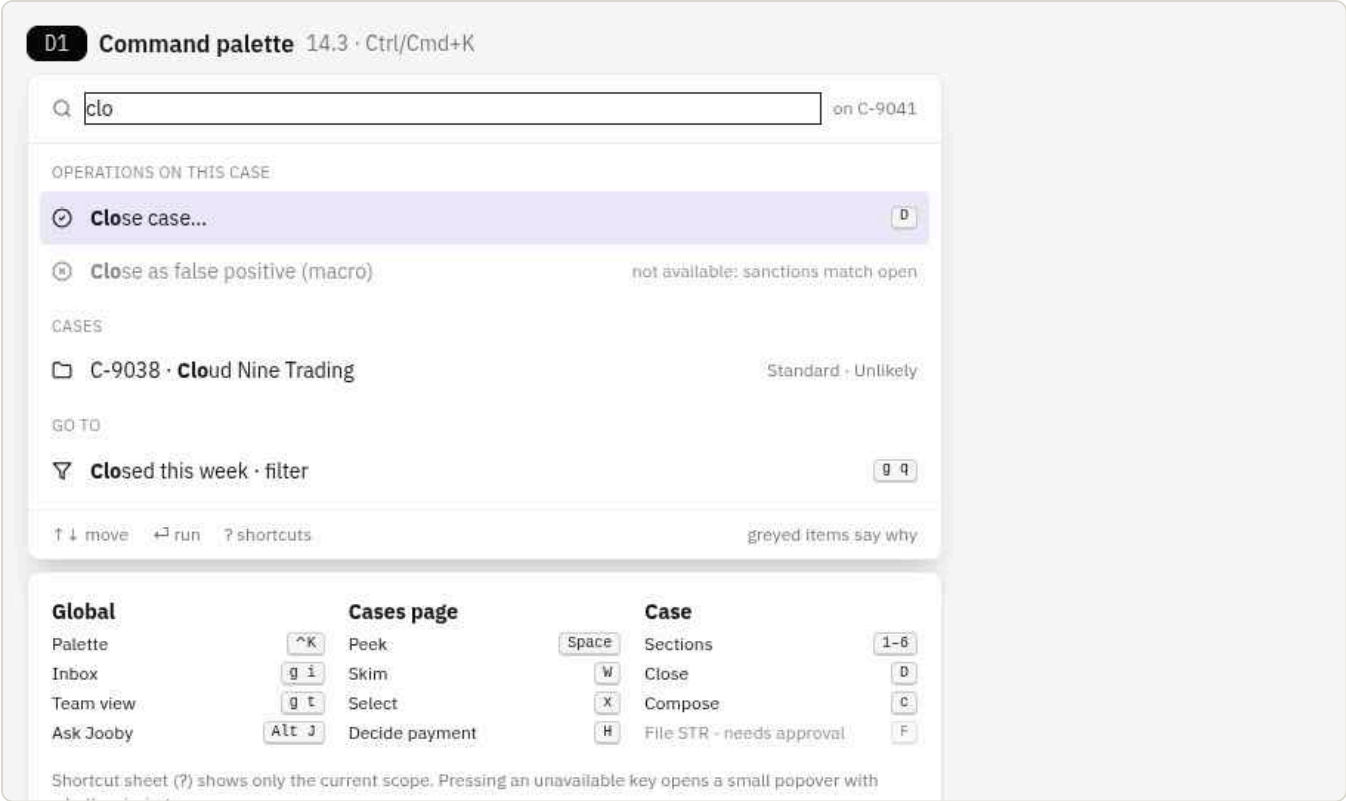


Fig. 39-D1-command-palette · Command palette and shortcut sheet

The palette lists operations on the current case first; greyed items say why they're unavailable. The shortcut sheet (?) shows only the current scope.

8. The case page

One page per case. A header, the case key panel and the Decide column frame six sections; the first paint shows enough to decide most cases without scrolling.

8.1 First paint: header, case key panel, Case detail views, cockpit

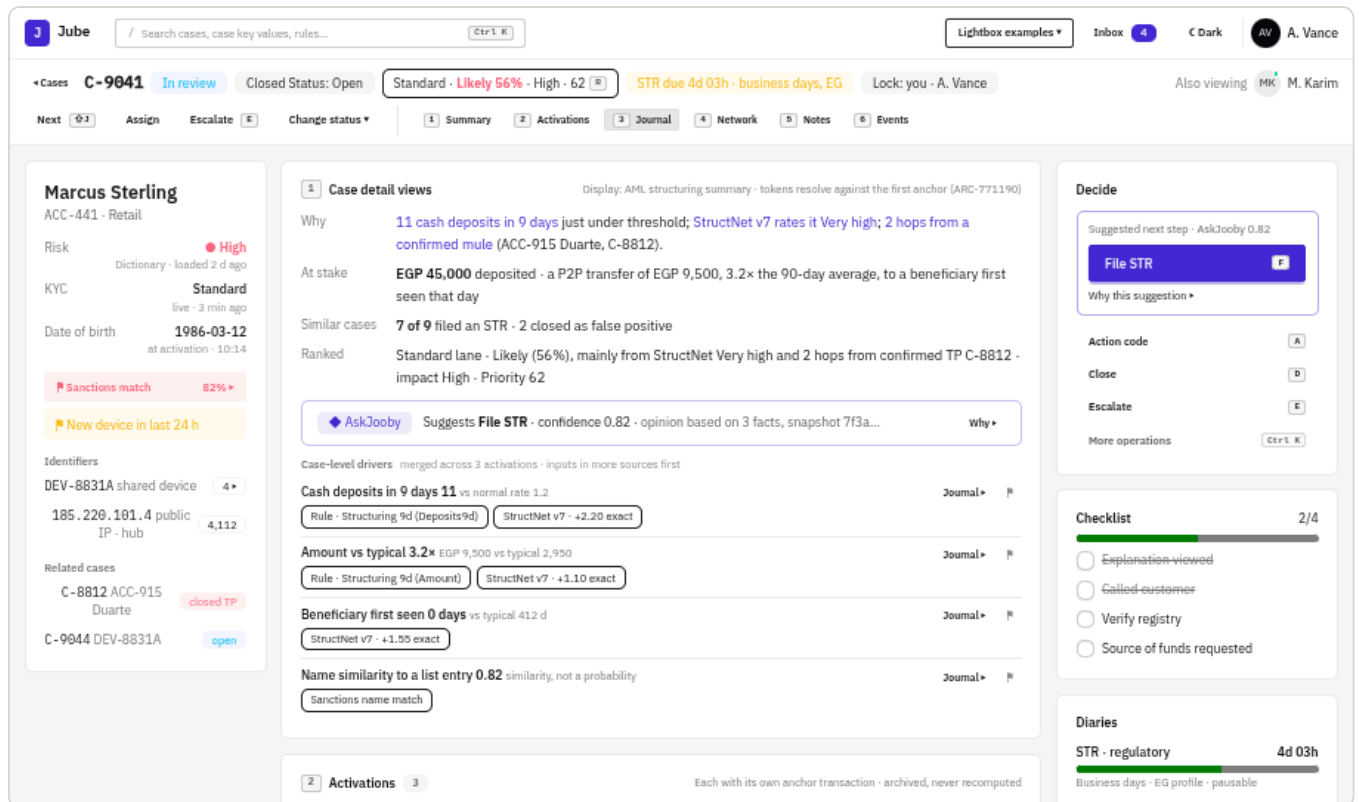


Fig. 04-case-page · Case page

The header carries the risk chip `Standard · Likely 56% · High · 62`, the STR diary (4d 03h, business days, EG), the lock and presence (M. Karim also viewing). The case key panel shows provenance under each value. Case detail views answer first, now including the **Ranked** line, then the case-level drivers.

Interaction	Does	Call	Status
Open the case	One payload for the first paint: header, case key panel, detail views, Activations, risk summary (< 300 ms)	<code>GET /api/Case/{id}/Anchor</code> (CH-00)	New
Presence	Join and receive who else is viewing	<code>CaseHub.Join</code> , <code>Presence</code> (CH-02, CH-10)	New
Live refresh	Risk changed, case changed	<code>CaseHub.CaseRiskChanged</code> , <code>CaseChanged</code> (CH-11)	New
Identifier DEV-8831A	Pivot the Journal to the device	S3-08 → <code>GET /api/Journal</code>	Extend
Identifier counts (4, 4,112)	Shared-identifier counts	<code>GET /api/Graph/KeyCounts</code> (KP-06)	New
Live KYC "3 min ago"	Live lookup at case open through the dispatcher	inside KP-01 (KP-02)	New
Ranked line	One sentence from the case risk	part of CH-00 (S1-09)	New
Driver chips / Journal ▶ / ▮	Jump to the Activation; filter the Journal; feedback	Client; S1-07; <code>POST /api/ExplanationFeedback</code> (S1-08)	Client / New
Cockpit load	Valid operations, checklist, diaries	<code>GET /api/CaseOperation/Available</code> , <code>/Case/{id}/Checklist</code> , <code>/CaseDiary</code> (DC-01)	New

8.2 Case risk popover (R)

The screenshot shows the Jube v2 interface with a case risk popover open for case C-9041. The popover displays the following information:

- Case risk - C-9041**: cold start - recomputed 4 min ago
- Likelihood 56% - Likely**: base rate 8% (AML structuring)
- StructNet v7 - Very high**: +1.15
- Network - 2 hops from ★ C-8812**: +0.83
- Customer risk tier - High**: +0.44
- Structuring 9d - shares inputs, counted at 30%**: +0.20
- Sanctions 0.82 - unconfirmed**: +0.09
- Log-odds contributions after $\kappa 0.7$: they sum exactly to +2.70. Evidence behind it: calibration not yet verified (cold start).**
- Impact High (4)**: structuring 3 - ring of 4 accounts +1 - EGP 45,000 (money band 2)
- Urgency Standard lane**: STR due 4d 03h (business days, EG) - moves to Deadline near at 2 d
- Priority 62**: $62 = \ln(1 + 0.56 \times 30)$, scaled to 0-100
- Your assessment: none**
- Cash deposits**: Rule - Structuring 9d (Amount) vs typical 2,950
- Beneficiary first seen 0 days** vs typical 412 d
- Name similarity to a list entry 0.82** similarity, not a probability

The case details on the left show a high risk level and a standard KYC status. The right sidebar includes a 'Decide' section with a 'File STR' button and a checklist of actions.

Fig. 05-case-risk-popover · Case risk popover

Likelihood 56% (Likely, cold start, base rate 8%). Contributions after $\kappa 0.7$ sum to +2.70: StructNet +1.15, network +0.83, customer tier +0.44, Structuring 9d +0.20 (shares inputs, counted at 30%), sanctions +0.09. Impact High (4). Urgency: Standard lane, moves to Deadline near at 2 d. Priority $62 = \ln(1 + 0.56 \times 30)$ scaled.

Interaction	Does	Call	Status
Hover or R	The full case risk	GET /api/Case/{id}/Risk (CH-03)	New
Your assessment: Low / Medium / High	Recorded beside the computed likelihood, with undo	Op: AssessRisk (CH-14)	New

8.3 Case header: lanes, risk method, Priority override

A1 Case header: lanes, risk method, Priority override 4.5.5 · 4.5.7 · 4.5.12

LANE 1 · LIVE MONEY

C-9044 In review

Live money · hold 5 h 42 m

Possible 48% · Moderate · 38

Held ARC-771240 · EGP 12,300 · ACC-778 Osei → ACC-02 Alpha LLC

Decide payment... H

LANE 2 · MANDATORY (FLOOR: CONFIRMED SANCTIONS MATCH)

C-9050 In review

Mandatory · freeze report due 23 h

Very likely 91% · Severe · 88

Floor set by SAN-01 confirmed match: lane and impact can't drop, Suspend Bypass not allowed

RISK METHOD · COLD START (TODAY) VS CALIBRATED (LEARNED COMBINER, PHASE 1)

Likely 56% · High · 62 cold start

Weights from configuration; base rate 8% from 212 closed cases. Shown as a band first; the number is secondary.

Likely 61% · High · 65 calibrated v2

Learned from 1,004 outcomes · backtest Brier 0.12 · of cases called "Likely", 58% were TP. Popover adds a reliability line.

PRIORITY OVERRIDDEN (Op: CHANGEPRIORITY, REASON AND EXPIRY)

Likely 56% · High · ~~62~~ 90

Set to 90 by S. Okoro · "Police request, same subject" · expires 26 Sep 17:00, then back to computed

Remove override

Fig. 32-A1-case-header · Case header variants

- **Live money** (lane 1) puts the hold countdown in the header, with Decide payment (H).
- **Mandatory** (lane 2) states which minimum-lane rule put it there. Neither its lane nor its impact can drop.
- **Cold start vs calibrated:** the risk chip carries its method. Once calibrated, it adds a reliability line ("of cases called Likely, 58% were TP").
- **Priority override:** the computed value is struck through, and the chip shows who set the override, why, and when it expires (Op: ChangePriority).

8.4 Diaries in the Decide column

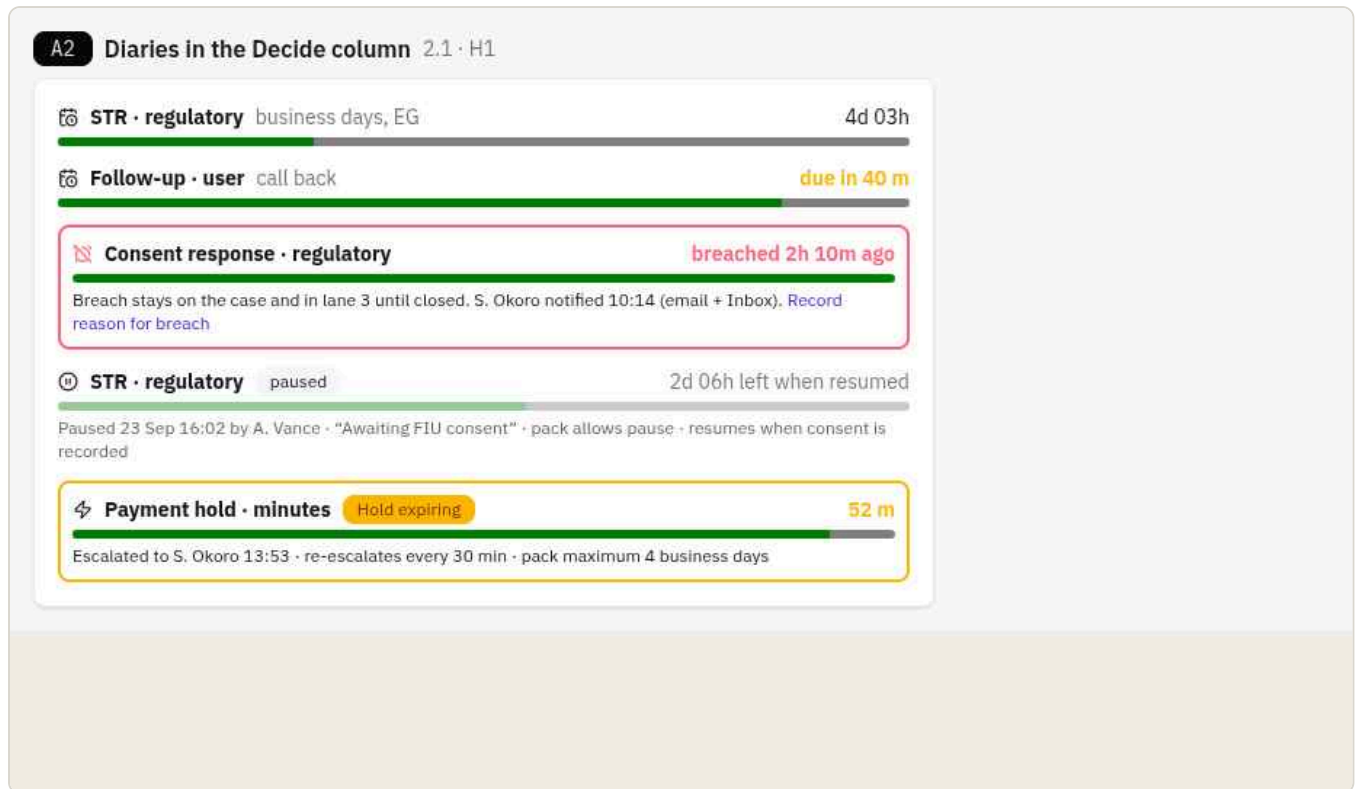


Fig. 33-A2-diaries · Diary states

The same meter serves every diary, in six states: normal, due soon, **breached** (it stays on the case and escalates), **paused** (with the reason and the time left once resumed), payment hold, and **Hold expiring** (escalated).

8.5 Live case state

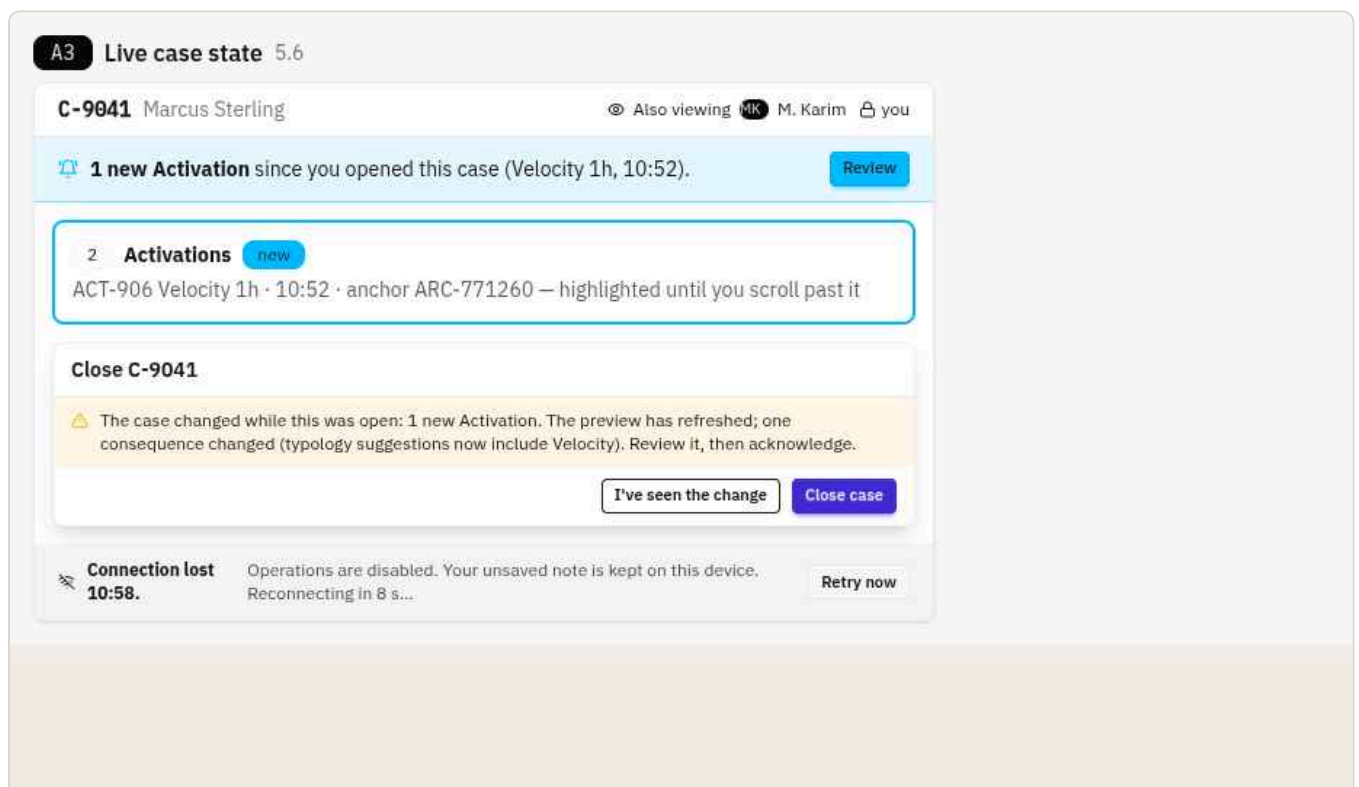


Fig. 34-A3-live-case-state · Presence, case changed, lightbox changed, connection lost

- The header shows who else is viewing the case.
- "1 new Activation" appears as a banner, and the changed section is highlighted.
- An open lightbox refreshes its preview, and submit is disabled until the analyst acknowledges the change.
- If the connection drops, operations are disabled and unsaved text is kept on the device.

9. Why it alerted: activations and explanations

Section 2 of the case page: each model and rule that fired, why it fired, and how much each input contributed.

9.1 StructNet v7: score strip, Exact waterfall, sensitivity, health

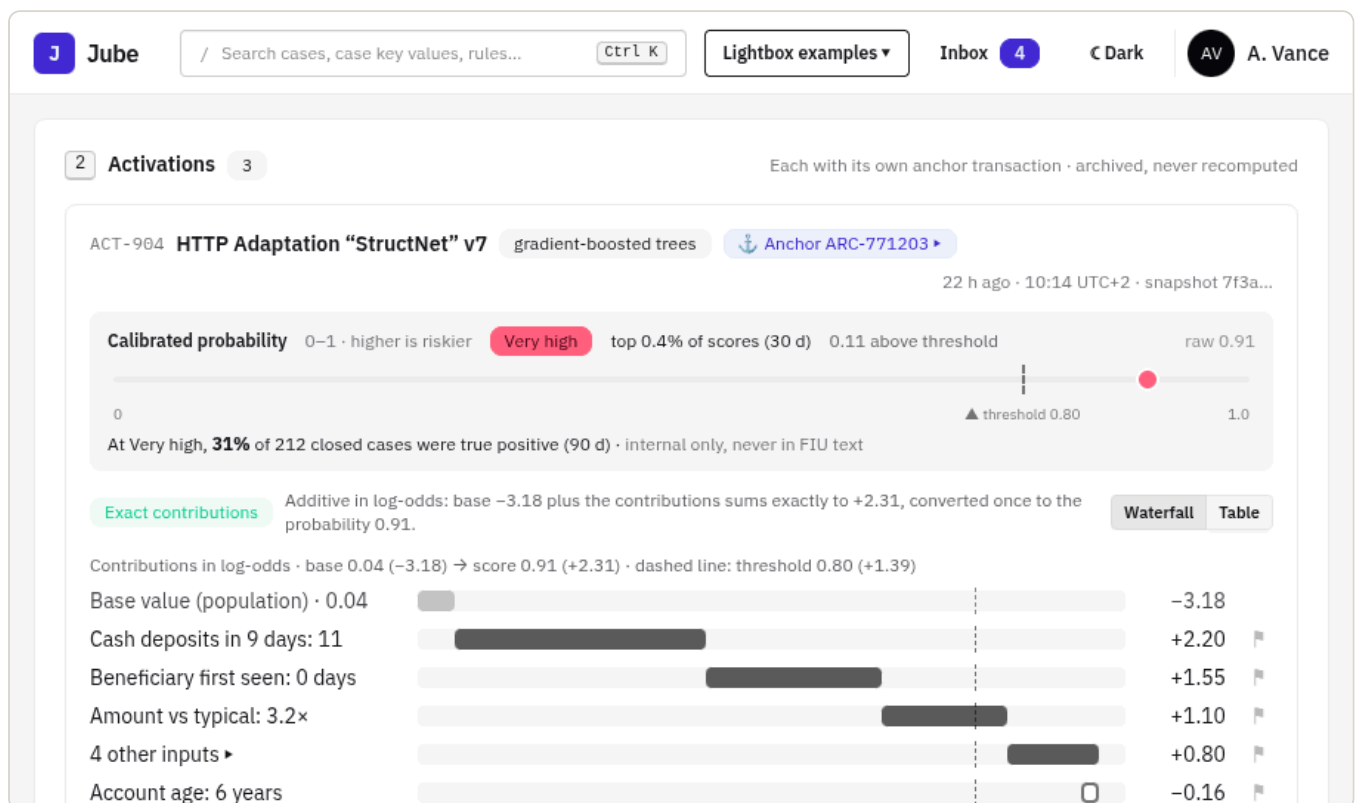


Fig. 06-activation-waterfall · Activation waterfall



Fig. 06b-waterfall-detail · Sensitivity, compared to normal and health

The score strip shows calibrated probability, Very high, top 0.4% (30 d), 0.11 above threshold, and "31% of 212 closed cases were TP". Below it: the tier label, the log-odds waterfall with the dashed threshold, a negative contributor, "4 other inputs ▶", the sensitivity replay (0.74 if the beneficiary were ≥ 30 days old), compared to normal (median and mean rate), and health.

Interaction	Does	Call	Status
Section load	CaseActivations with anchor, version, archived explanation, score metadata, band, percentile, precision, health, baselines	GET /api/Case/{id}/Activations (S2-01) inside CH-00	New
Anchor ARC-771203 ▶	Transaction card	GET /api/Archive/{id}/Card (TC-01)	New
Model name / Model facts ▶	Model card as at the snapshot	GET /api/ModelFacts (S2-04)	New
Waterfall / Table; "4 other inputs"	Switch view; expand	—	Client
Flag on a contribution	Feedback to the model owner	POST /api/ExplanationFeedback (S2-07)	New
Sensitivity line	Deterministic replay, Exact tier only	GET /api/Activation/{id}/Sensitivity (S2-08)	New
Add to narrative	Narrative Facts (behaviour only)	Op: AddNarrativeFact (S2-12)	New

9.2 Structuring 9d and the sanctions match

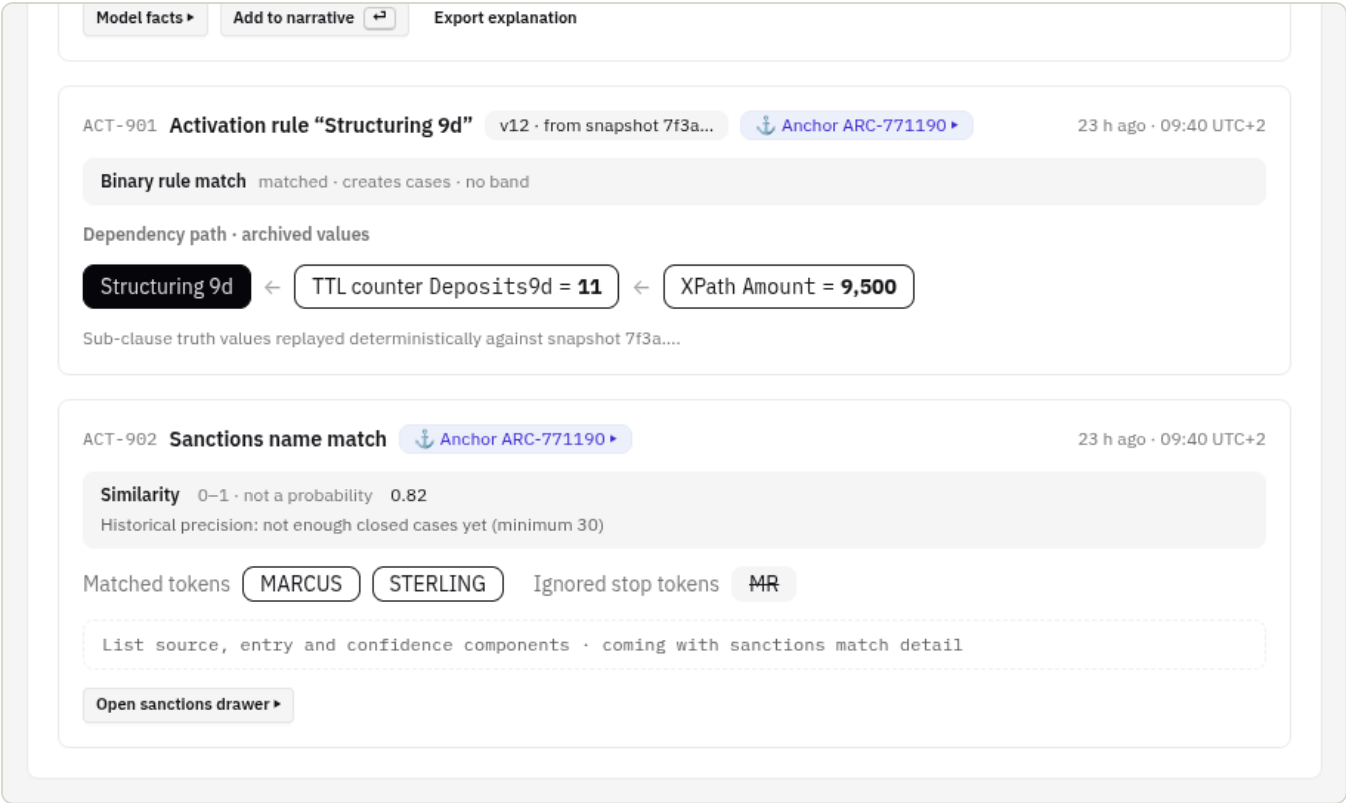


Fig. 07-rule-and-sanctions · Rule and sanctions

Both anchor on ARC-771190. The rule shows its dependency path with archived values. The sanctions match reads "Similarity 0.82, not a probability" and "not enough closed cases yet".

Interaction	Does	Call	Status
Rule dependency path	Parsed rule graph with archived values	GET /api/Activation/{id}/RulePath (S2-09)	New
Open sanctions drawer	Matches by source; match detail	Existing sanction search + /SanctionsMatch (KP-04)	Exists + New

10. The Journal

Section 3 of the case page: the money. Every transaction for the case key, with anchors pinned, baselines, pivots to any identifier, and tags.

10.1 Case subject, anchors pinned

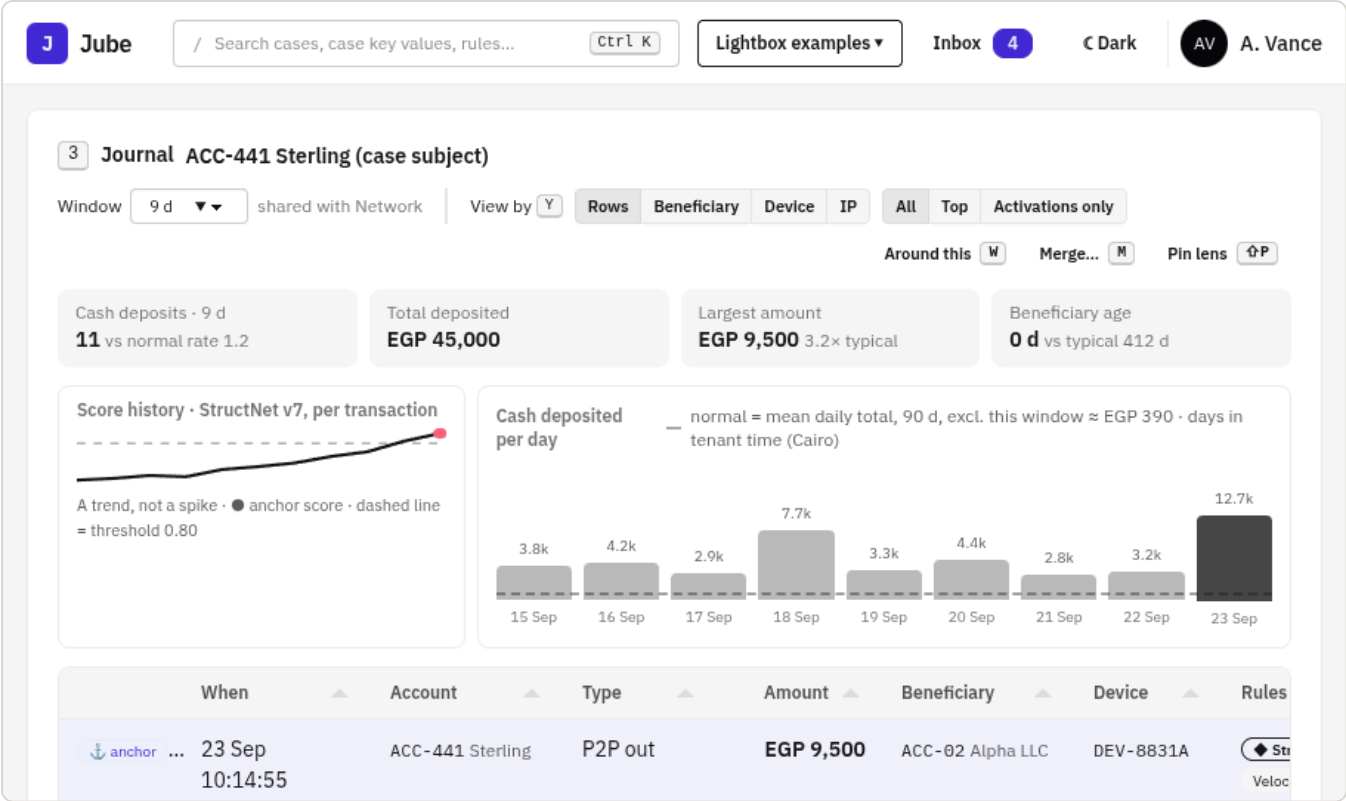


Fig. 08-journal · Journal

	When	Account	Type	Amount	Beneficiary	Device	Rules
anchor ...	23 Sep 10:14:55	ACC-441 Sterling	P2P out	EGP 9,500	ACC-02 Alpha LLC	DEV-8831A	Stu Veloc
anchor ...	23 Sep 09:40	ACC-441 Sterling	Cash deposit	EGP 9,500		Heliopolis	Stu Sa
	23 Sep 10:12	ACC-441 Sterling	Login	—		DEV-8831A	New c
	23 Sep 09:02	ACC-441 Sterling	Cash deposit	EGP 3,200		Heliopolis	
	22 Sep 16:40	ACC-441 Sterling	Cash deposit	EGP 3,200		Nasr City	
	21 Sep 11:25	ACC-441 Sterling	Cash deposit	EGP 2,800		Zamalek	
	20 Sep 14:05	ACC-441 Sterling	Cash deposit	EGP 4,400		Heliopolis	
	19 Sep 10:31	ACC-441 Sterling	Cash deposit	EGP 3,300		Maadi	

Fig. 08b-journal-grid · Journal grid with both anchors pinned

Aggregation strip (baselines labelled typical and normal rate), score-history sparkline, daily chart with the normal line and timezone note, and the grid with both anchors pinned and ♦ rules shown by weight.

Interaction	Does	Call	Status
Rows	Rows for key + value in the window; per row keys, rules fired, anchor flag	GET /api/Journal (S3-01)	Extend (Case Key Journal)
Aggregation strip	Archived counters at the anchor; computed baselines	GET /api/Journal/Aggregate (S3-14)	New
Daily chart	Series + server SVG	GET /api/Journal/Series , GET /api/Chart/JournalSeries (S3-15)	New
Sparkline	Score per transaction	GET /api/Journal/ScoreHistory (S3-16, reads ArchiveScore)	New
Row click / Enter	Select (edges light up) / transaction card	Client / TC-01	Client / New
View by (Y)	Explode lanes	GET /api/Journal/Explode (S3-06)	New
Around this (W)	Same-day activity on the transaction's keys	GET /api/Journal/Around (S3-10)	New

10.2 Pivoted to DEV-8831A: not the case subject

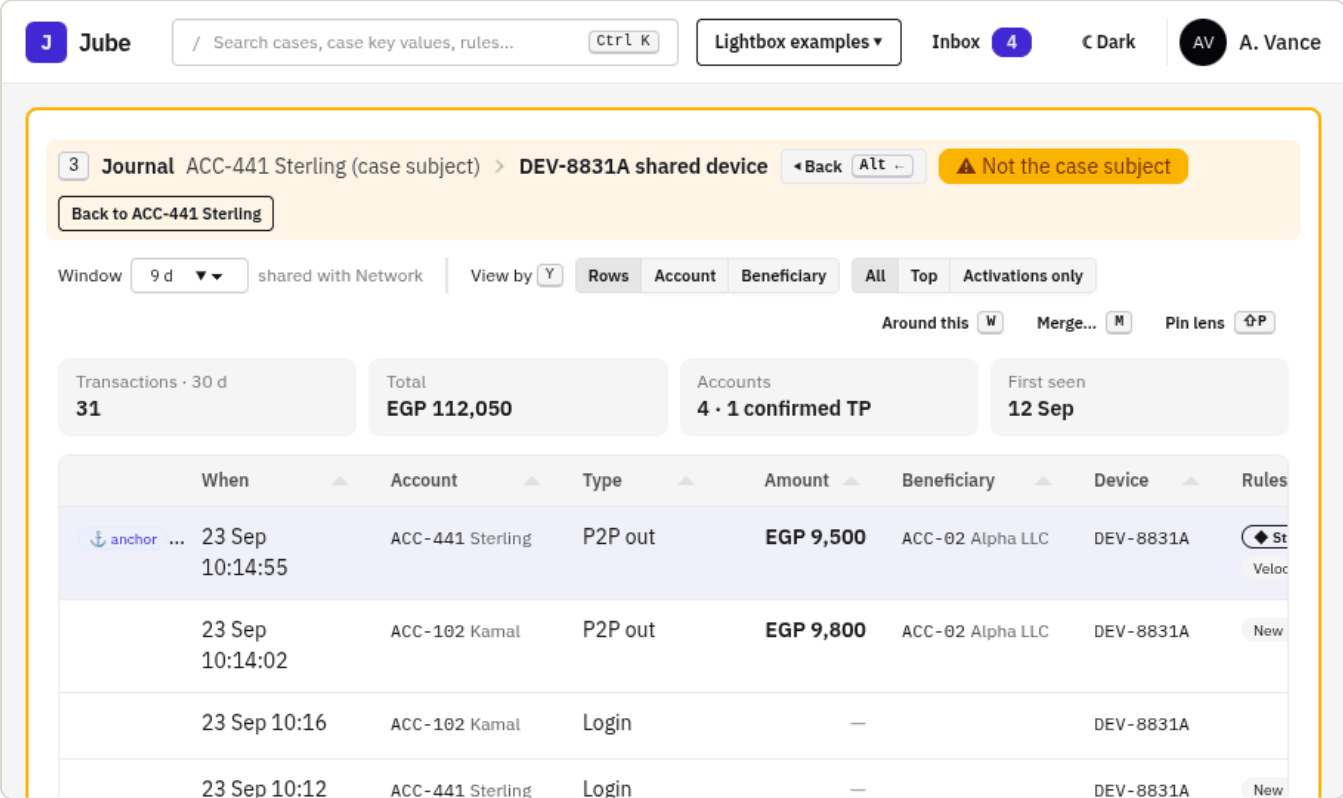


Fig. 09-journal-pivot · Journal pivot

A warning border, "⚠ Not the case subject", a breadcrumb (ACC-441 Sterling > DEV-8831A), Back (Alt+←) and "Back to ACC-441 Sterling". The case key panel, which sits to the left of this section and is not shown in this crop, does not change.

Interaction	Does	Call	Status
Pivot / breadcrumb / Back	Move or restore the focus; kept in the URL	S3-08, S3-09 → GET /api/Journal	Client + read

10.3 Tagging transactions

Today an analyst can tag each transaction in the case journal with a pill, and the tags are set up in configuration. v2 keeps that and puts it on every row of the Journal and in the transaction card.

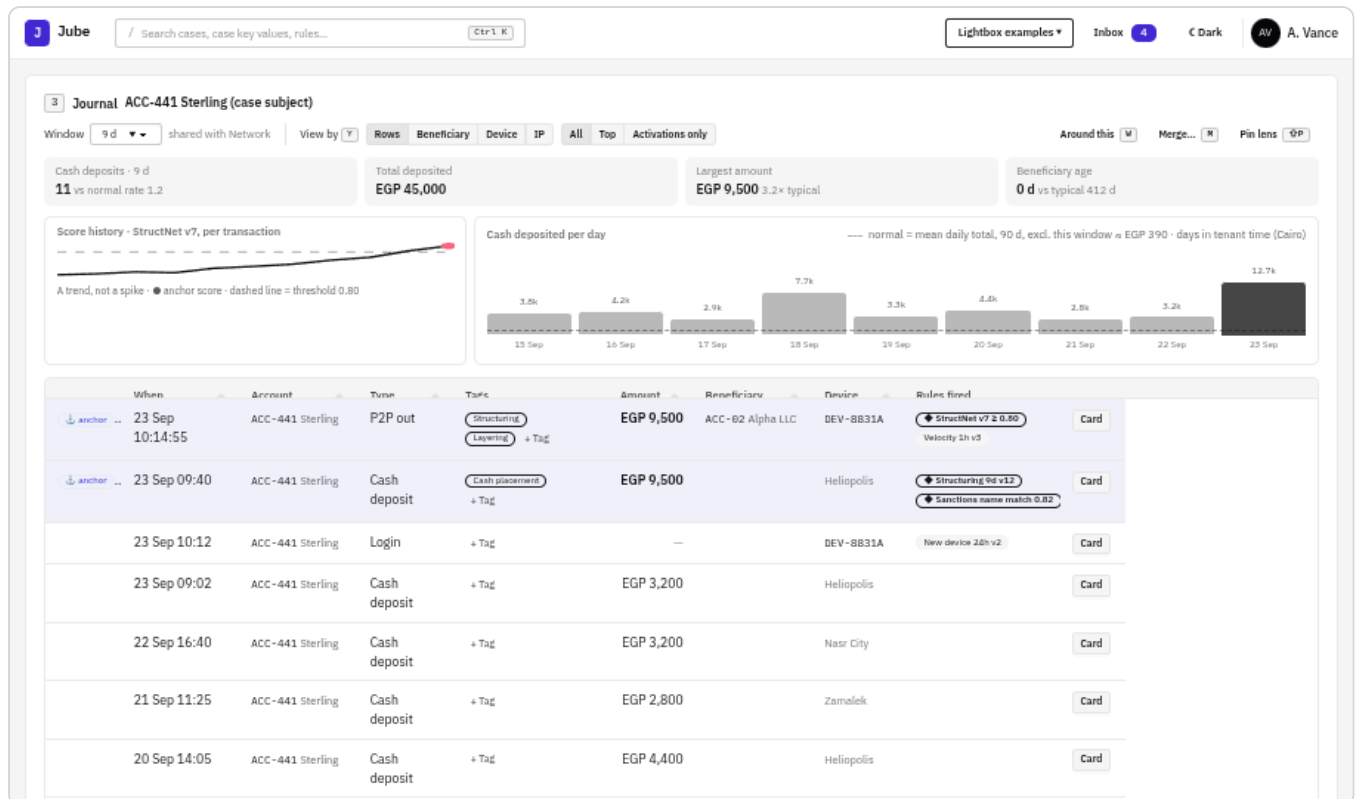


Fig. 29-journal-tags · Journal rows with tag pills

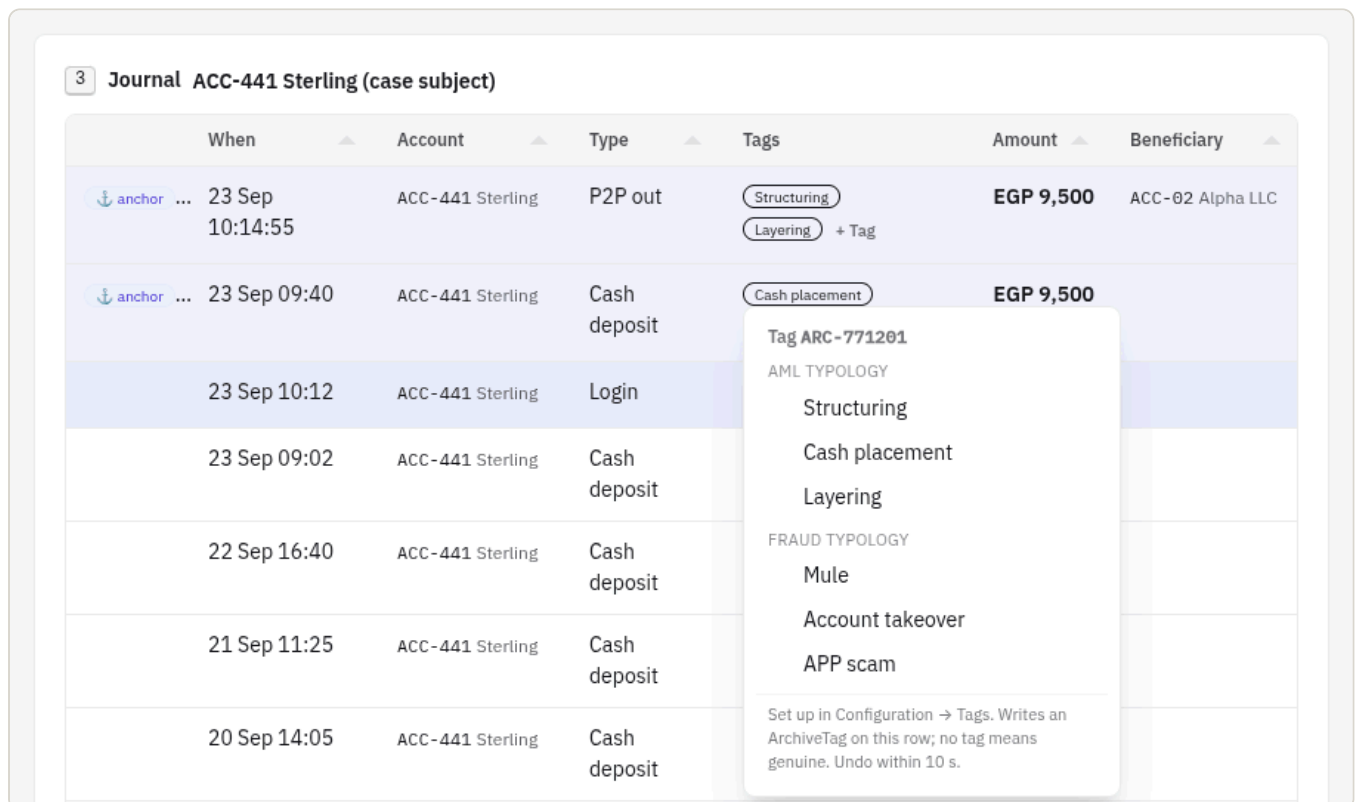


Fig. 30-tag-menu · Tag menu

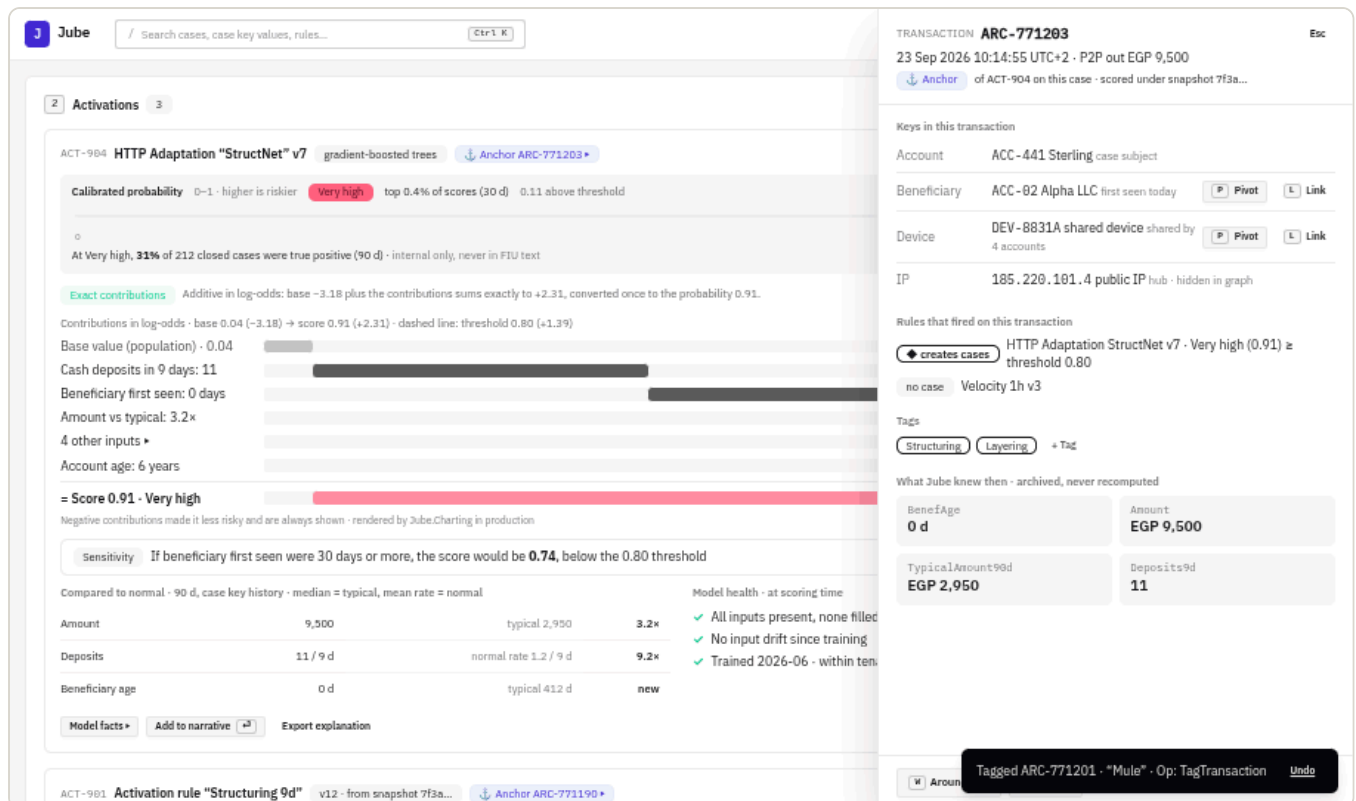


Fig. 31-card-tags · Tags in the transaction card

- **A Tags column** sits beside Type. It shows the row's tags as pills and ends with "+ Tag".
- **" + Tag "** opens a small menu of the tenant's configured tags, grouped as they are set up (here: AML typology and Fraud typology). A tick shows each tag already on the row. Clicking a tag adds or removes it.
- **Reversible:** each change is inline with a 10-second undo toast, so there is no lightbox (5.3). It is still a case operation, so it is audited.
- **The transaction card** shows the same tags with its own "+ Tag", so a transaction can be tagged wherever it is opened.
- **Meaning:** the pill writes an `ArchiveTag` on that archived row. Any row can be tagged, not only anchors or rows linked to Activations. Training is a separate process that reads tags on its own schedule. **No tag means genuine**, so there is no "Genuine" tag.

Interaction	Does	Call	Status
Journal rows	Each row carries its tags	<code>GET /api/Journal</code> (S3-01) returns <code>tags[]</code> per row	Extend
" + Tag " menu	The configured tags for the case's model, grouped, active only	Existing <code>EntityAnalysisModelTag</code> configuration, scoped per model by <code>EntityAnalysisModelId</code>	Exists
Toggle a tag	Adds or removes the <code>ArchiveTag</code> ; undo toast; <code>CaseEvent</code>	<code>Op: TagTransaction</code> / <code>Op: UntagTransaction</code> over today's write, <code>PUT /api/Invoke/Archive/Tag</code> (<code>ArchiveService</code> , operation <code>ArchiveTag</code>)	Exists → Extend into an operation
Undo	Reverse within 10 s	<code>Op: Undo</code>	New
Transaction card tags	Same tags and menu	<code>GET /api/Archive/{id}/Card</code> returns tags (TC-01)	Extend

10.4 Bulk tagging

Design:

- **Selection:** a checkbox column, Shift-click for a range, Ctrl-click to add, and "Select all in view" for the current focus window (for example the 11 deposits of Structuring 9d). A lane header in the Journal offers "Select lane".
- **Bulk bar:** "11 selected · Tag... · Untag... · Clear". **T** opens the tag menu for the selection.
- **Mixed state in the menu:** ✓ on all, – on some, empty on none. Clicking a – tag adds it to the rest.
- **One operation, one undo:** the whole change is one `CaseEvent` and one 10-second undo, as for a single tag (10.3).
- **Limit:** 500 rows per change. Above that, the bar offers "Tag all 2,340 matching rows", which shows the count in a preview and runs as a background job with progress in the Inbox.

Interaction	Does	Call	Status
Tag the selection	Adds and removes tags on many rows at once	Op: TagTransactions {archiveIds[], add[], remove[]} → CG-49 <code>PUT /api/Invoke/Archive/Tag/Bulk</code>	New
Tag by filter	Preview count, then a background job	CG-49 with <code>filter</code> and <code>previewOnly</code>	New
Undo	Reverses the whole change	Op: Undo	New

10.5 Journal: Merge and Pin lens

B1 Merge lens: two keys on one timeline 5,7 - neutral categorical palette, Merge lanes only

3 **Journal** Merge lens **A ACC-441 Sterling (case subject)** **B ACC-102 Karnal** + Add key (max 4) Colour is a lane label only, never a risk signal - every row also carries its letter

When	Type	Amount	Beneficiary · device	Tags
A 23 Sep 10:14:55	P2P out	EGP 9,500	ACC-02 Alpha LLC - DEV-8831A	Layering
B 23 Sep 10:14:02	P2P out	EGP 9,800	ACC-02 Alpha LLC - DEV-8831A	
A 23 Sep 09:40	Cash deposit	EGP 9,500	Heliopolis branch	Cash placement
B 23 Sep 09:12	Cash deposit	EGP 9,700	Heliopolis branch	

Pin lens Pinned: ARC-771203 (A) and ARC-771201 (B). They stay at the top in every lens and pivot, and travel to Compose as facts. 53 s apart - same device - same beneficiary

Fig. 35-B1-merge-pin-lens · Merge lens and Pin lens

Up to 4 keys on one timeline. Each lane has a letter and a low-chroma colour, used as a label only and never as a risk signal. Pinned transactions stay at the top in every lens and travel to Compose as facts.

11. The Network

Section 4 of the case page: who and what is connected to the case subject, as a graph and as a list.

11.1 Graph with shared selection

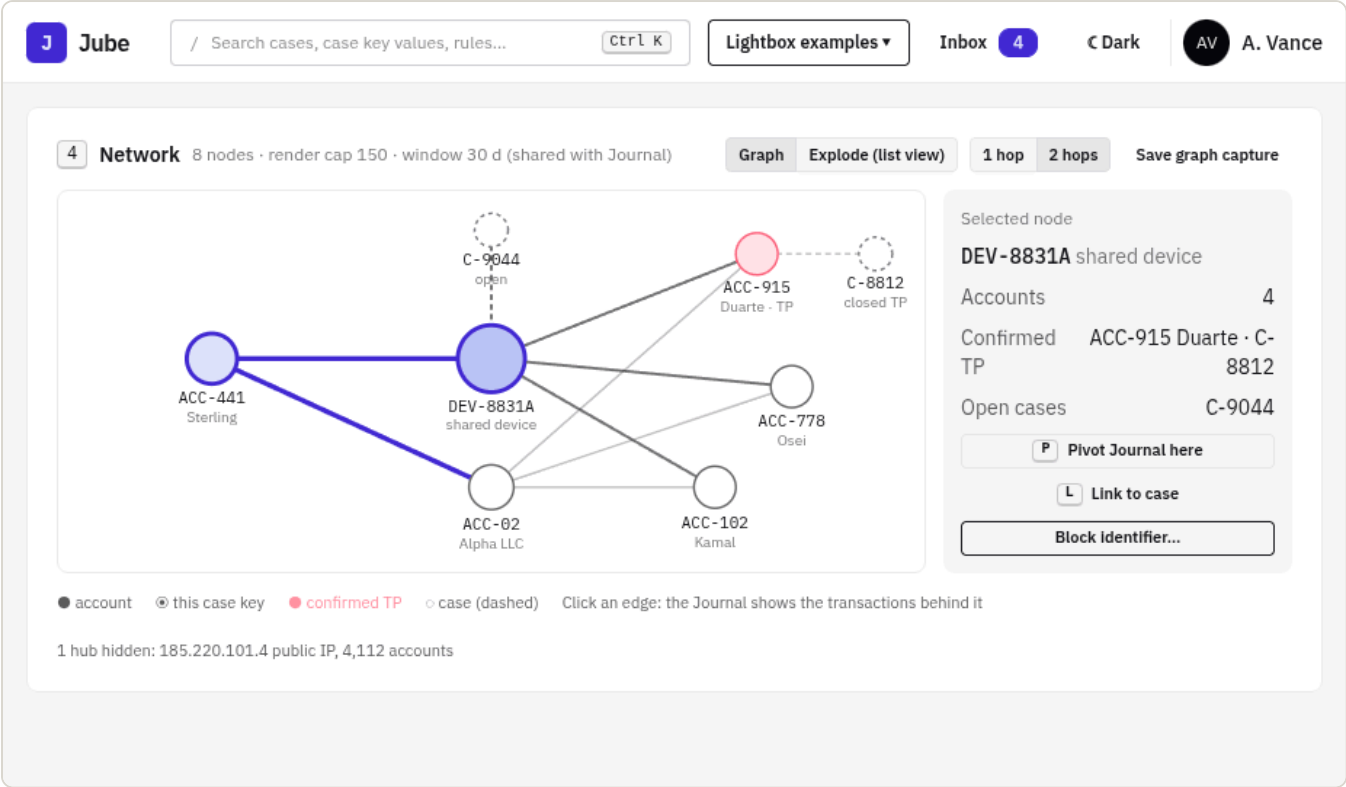


Fig. 10-network · Network

The selected transaction ARC-771203 highlights its edges. Clicking a node fills the panel (Pivot, Link, Block). Clicking an edge filters the Journal to the transactions behind it. The IP hub is hidden.

Interaction	Does	Call	Status
Section load	Neighbourhood; hubs suppressed; cap 150	GET /api/Graph/Neighbourhood (S4-01)	New
Edge click	Transactions behind the edge → Journal	GET /api/Graph/Edge/{id}/Transactions (S4-05)	New
Link to case / Block identifier	Lightboxes	Op: LinkCaseKey, Op: BlockIdentifier (S4-07, S4-08)	New

11.2 Explode: the Network's list view

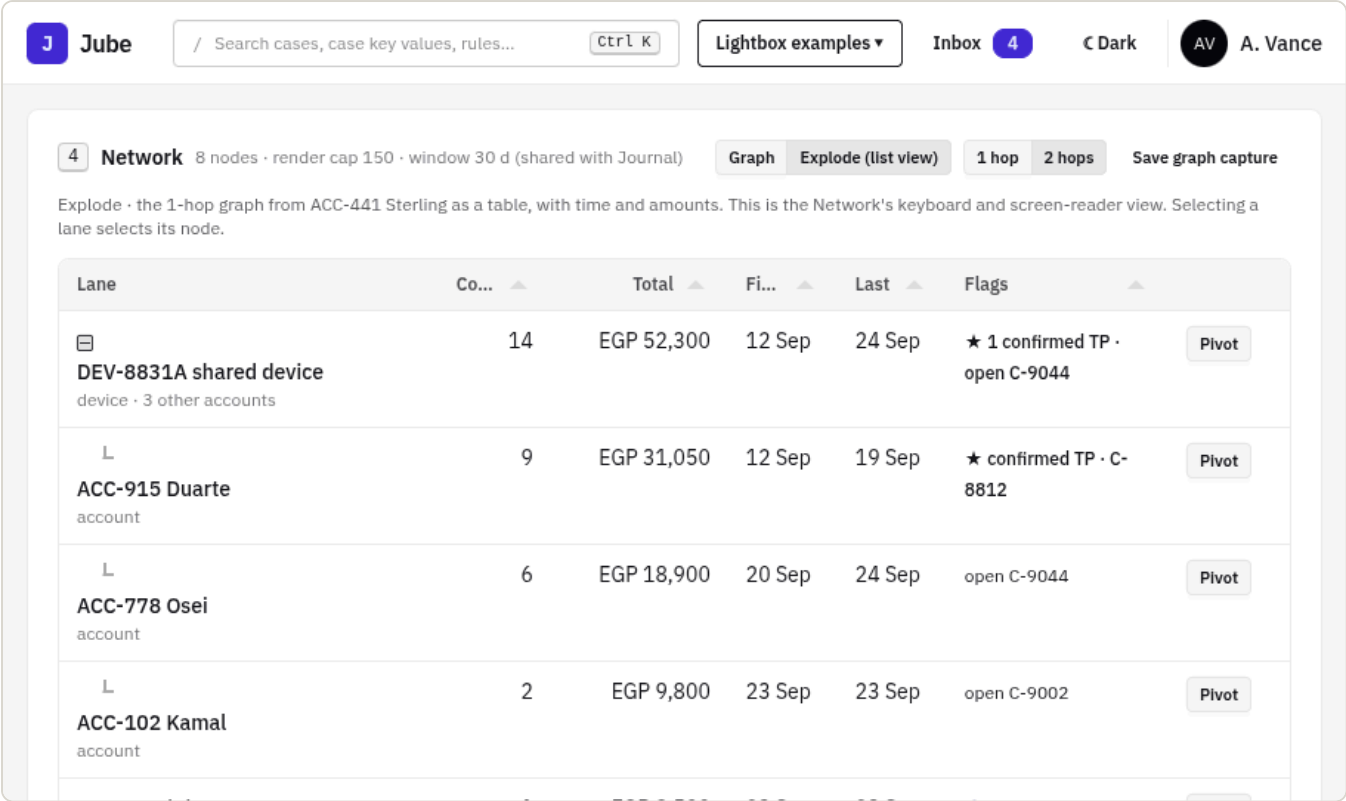


Fig. 11-explode · Explode

The 1-hop graph as a Tabulator data tree with count, total, first and last, and flags. The hub is one collapsed lane.

Interaction	Does	Call	Status
Explode (list view)	Lanes by linked key	GET /api/Journal/Explode?by=linkedKey (S4-09)	New
Lane click	Select the node	—	Client

11.3 Explode with sparklines

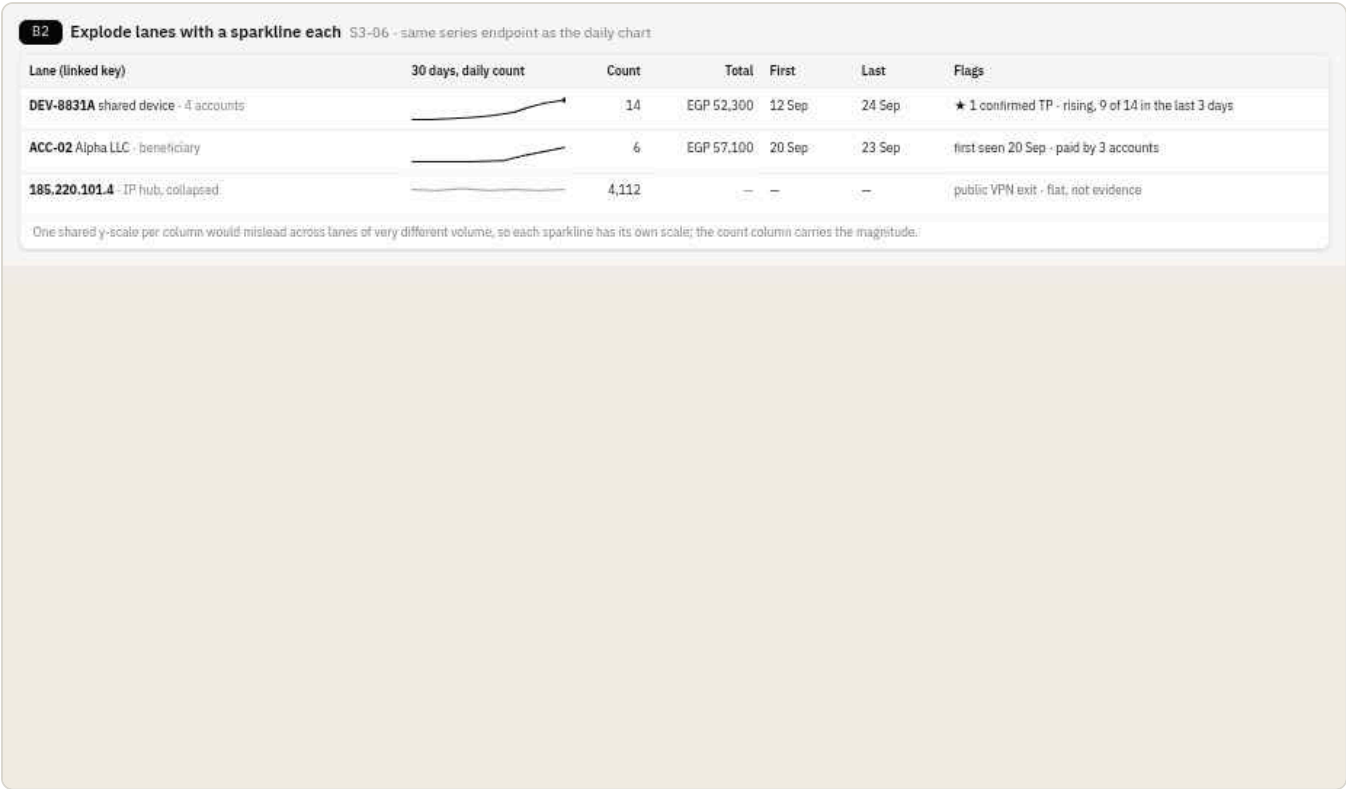


Fig. 36-B2-explode-sparklines · Explode lanes with sparklines

One 30-day sparkline per lane, each on its own scale; the count column carries the magnitude. The hub lane is shown flat and faded.

12. Drawers

Detail that opens beside the page without losing your place: the transaction card, its raw payload and the model's facts.

12.1 Transaction card and raw payload

The screenshot displays the Jube transaction card interface. On the left, a sidebar shows the case details for 'Marcus Sterling' (ACC-441 - Retail), including risk level (High), KYC status (Standard), and date of birth (1986-03-12). The main panel shows 'Case detail views' with a summary of 11 cash deposits in 9 days, a P2P transfer of EGP 9,500, and a StructNet v7 score of 0.82. The right panel shows the transaction details for 'TRANSACTION ARC-771203' (23 Sep 2026 10:14:55 UTC+2), including keys (Account, Beneficiary, Device, IP), rules that fired (HTTP Adaptation StructNet v7, Velocity 1h v3), and what Jube knew then (BenefAge 0 d, Amount EGP 9,500, TypicalAmount90d EGP 2,950, Deposits9d 11).

Fig. 14-transaction-card · Transaction card

The screenshot displays the Jube payload interface. The left sidebar is identical to the previous figure. The main panel shows 'Case detail views' with a summary of 11 cash deposits in 9 days, a P2P transfer of EGP 9,500, and a StructNet v7 score of 0.82. The right panel shows the transaction details for 'TRANSACTION ARC-771203' (23 Sep 2026 10:14:55 UTC+2), including keys (Account, Beneficiary, Device, IP), rules that fired (HTTP Adaptation StructNet v7, Velocity 1h v3), and what Jube knew then (BenefAge 0 d, Amount EGP 9,500, TypicalAmount90d EGP 2,950, Deposits9d 11). The central panel displays the raw JSON payload for the transaction, including fields like 'ArchiveId', 'EntityAnalysisModel', 'CreatedDate', 'SnapshotId', 'Payload', and 'Branch'.

Fig. 15-payload · Payload

The anchor ARC-771203: keys with Pivot and Link, rules that fired (◆ StructNet ≥ 0.80 creates cases; Velocity 1h does not), and what Jube knew then. Payload opens as the second drawer.

Interaction	Does	Call	Status
Open	Archived row, keys, rules with versions, counters	GET /api/Archive/{id}/Card (TC-01)	New
Payload ▶	Raw payload, audited	GET /api/Archive/{id}/Payload (TC-05)	Extend
Around this / Add to narrative facts	—	S3-10; Op: AddNarrativeFact	New

12.2 Model facts

The screenshot shows the Jube interface for case C-9041. The main panel displays 'Case detail views' with the following information:

- Why:** 11 cash deposits in 9 days just under threshold; StructNet v7 rates it Very high; 2 hops to confirmed mule (ACC-915 Duarte, C-8812).
- At stake:** EGP 45,000 deposited - a P2P transfer of EGP 9,500, 3.2x typical, to a beneficiary first seen 0 days.
- Similar cases:** 7 of 9 filed an STR - 2 closed as false positive.
- Ranked:** Standard lane - Likely (56%), mainly from StructNet Very high and 2 hops from confirmed impact High - Priority 62.

The 'Model facts' panel on the right shows details for 'StructNet v7':

- Name:** StructNet
- Version:** v7 (scored this case)
- Type:** Gradient-boosted trees
- Runs:** HTTP Adaptation endpoint
- Owner:** not declared by the endpoint
- Score:** Calibrated probability
- Score type:** 0-1 - higher is riskier
- Base value:** 0.04 (log-odds -3.18)
- Calibration:** Isotonic - 2026-06-30
- Operating point:** 0.80 (activation rule threshold)
- Training:** 2026-06
- Training window:** not declared by the endpoint
- Examples and positives:** not declared by the endpoint
- Performance since:** Very high band 31% of 212 closed cases true positive (90 d)
- Inputs:** Cash deposits in 9 days count - higher is riskier; Beneficiary first seen days - lower is riskier

Fig. 16-model-facts · Model facts

StructNet v7 as it was when it scored: gradient-boosted trees, base 0.04 (−3.18), "v8 is now live", "not declared by the endpoint", an unlabelled input flagged.

Interaction	Does	Call	Status
Open	Model card from the snapshot	GET /api/ModelFacts (MF-01)	New
Snapshot diff ▶	Diff between snapshots	GET /api/Snapshot/Diff (MF-02)	New

13. Notes and writing

Section 5 of the case page: coded notes, the Compose workspace for reports, and AskJooby beside the case.

13.1 Notes and action codes

Fig. 12-composer · Composer

Activity → result chips (digits) → text → `Ctrl+Enter`. "No answer" shows its follow-up rule (+4 h, capped by the STR diary). System notes sit quieter than analyst notes.

Interaction	Does	Call	Status
Activity select	Action codes, last used first	<code>GET /api/CaseWorkflowAction</code> (S5-03)	Extend
Result chips	Results with diary effect	<code>GET /api/CaseWorkflowActionResult</code> (S5-04)	New
Add note with code	Coded note, follow-up, hooks via the dispatcher (after the undo window)	Op: RecordAction (S5-06)	New

13.2 Compose and the quality scorecard

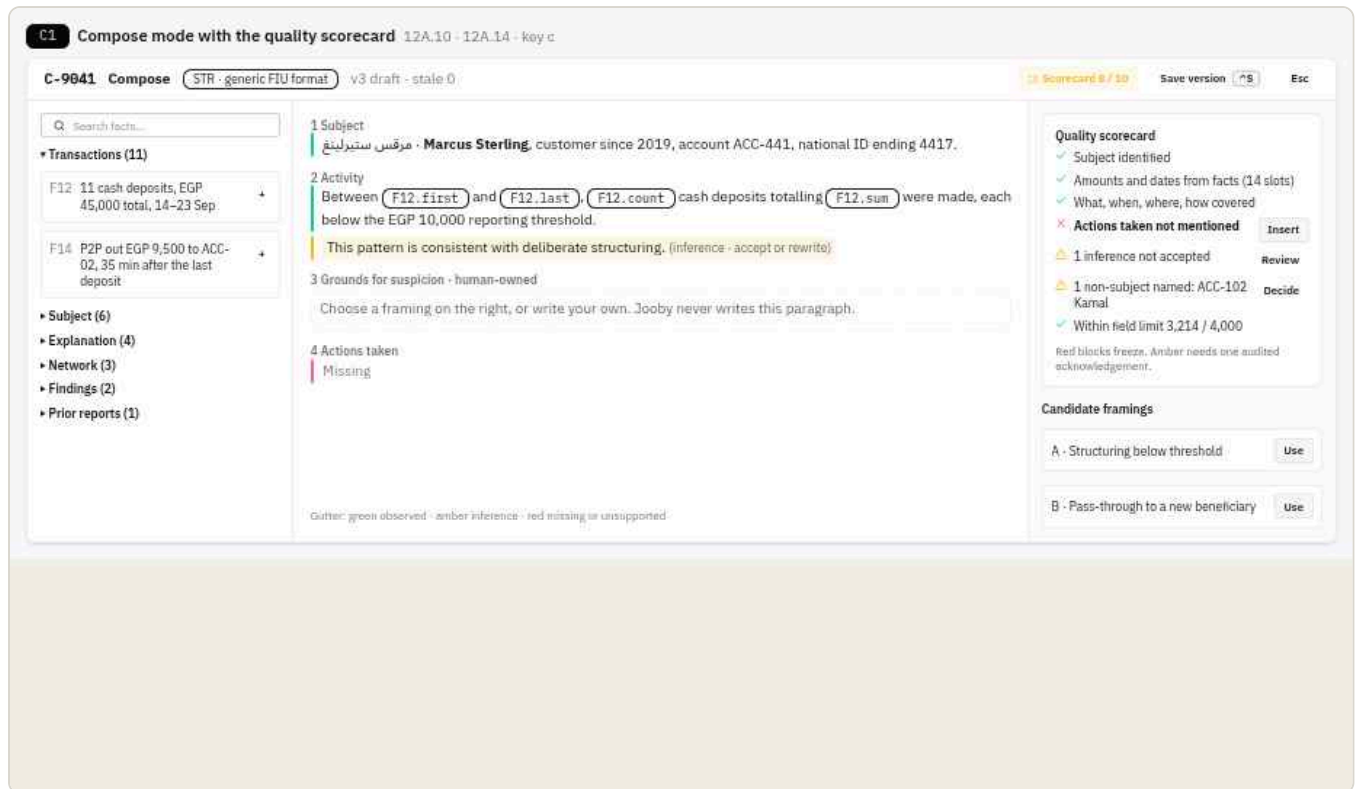


Fig. 37-C1-compose-scorecard · Compose mode

The facts tray is on the left and the narrative on the right. The narrative has a gutter marking each sentence as observed, inference or missing. The scorecard sits in the right column: red blocks freeze, and amber needs one audited acknowledgement. The grounds for suspicion are always written by a person.

13.3 AskJooby in the Decide column

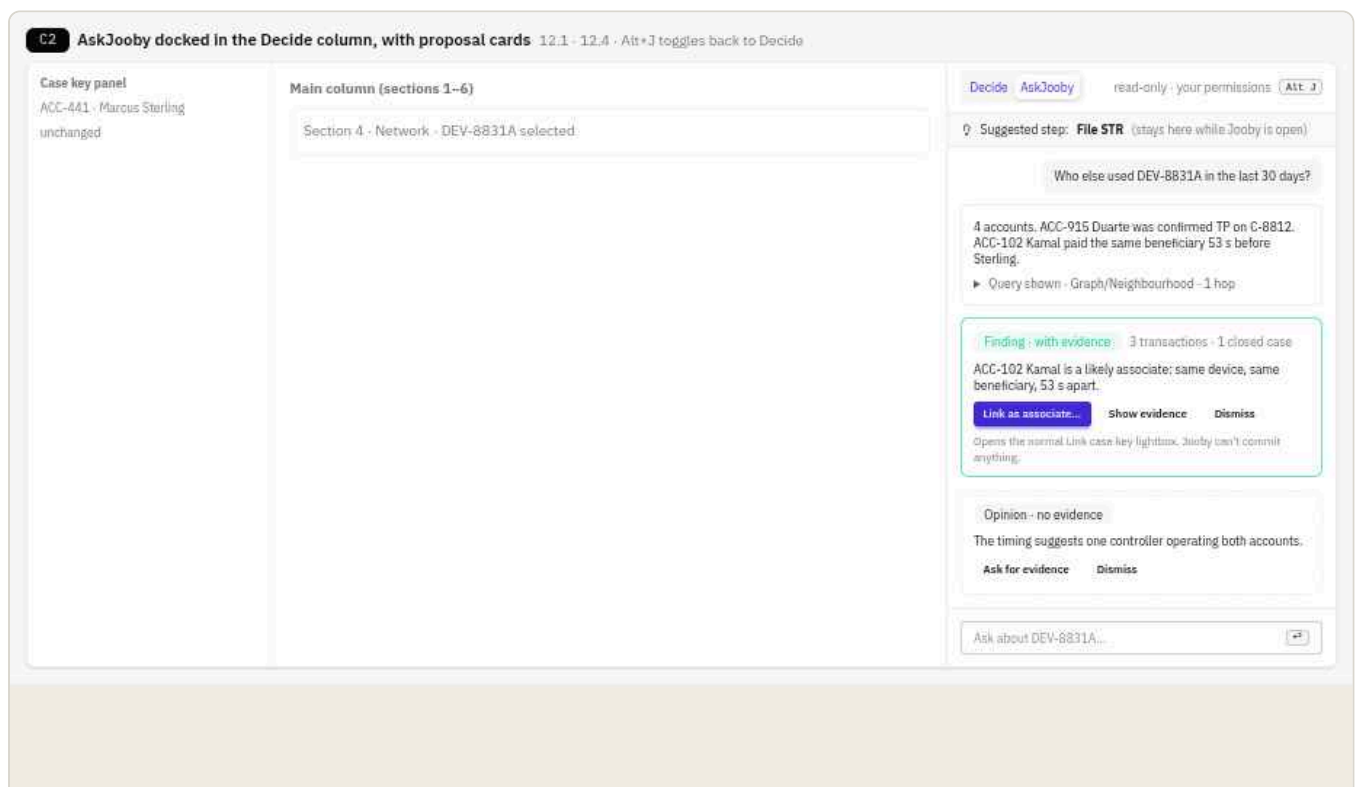


Fig. 38-C2-askjooby-panel · AskJooby docked with proposal cards

Alt+J swaps Decide for AskJooby, and the suggested step stays visible at the top. Every answer shows the query it ran. A **finding** (with evidence) has one primary button that opens the normal lightbox. An **opinion** (no evidence) can only ask for evidence or be dismissed.

14. Case history and audit

Section 6 of the case page: everything that happened to the case, in a tamper-evident chain, including who looked at it.

14.1 Events and risk history

Case Events Journal

hash chain verified · 8 events

When	Event	By	Detail	Chain
24 Sep 08:49	CaseRiskRecomputed	System	Scheduled sweep · Likely 56% · High · Standard · 62	✓
24 Sep 08:09	DiaryStarted	System	Follow-up · +4 h from No answer	✓
24 Sep 08:09	NoteAdded	A. Vance	Called customer → No answer	✓
24 Sep 08:02	Take	A. Vance	Lock taken via Skim	✓
23 Sep 10:14	ActivationAttached	System	StructNet v7 · Very high (0.91) · anchor ARC-771203	✓
23 Sep 09:41	DiaryStarted	System	STR · regulatory · business days, EG	✓
23 Sep 09:40	ActivationAttached	System	Sanctions name match · 0.82 · anchor ARC-771190	✓
23 Sep 09:40	CaseCreated	System	Structuring 9d v12 · anchor ARC-771190 · snapshot 7f3a...	✓

Case risk history every recompute is kept · Close, approvals and reports cite the one in force

#	When	Trigger	Method	Likelihood	Impact	Lane	Priority
4	24 Sep 08:49	Scheduled sweep (decay lanes)	cold start v1	Likely 56%	High	Standard	62

Fig. 13-events-risk-history · Case Events Journal

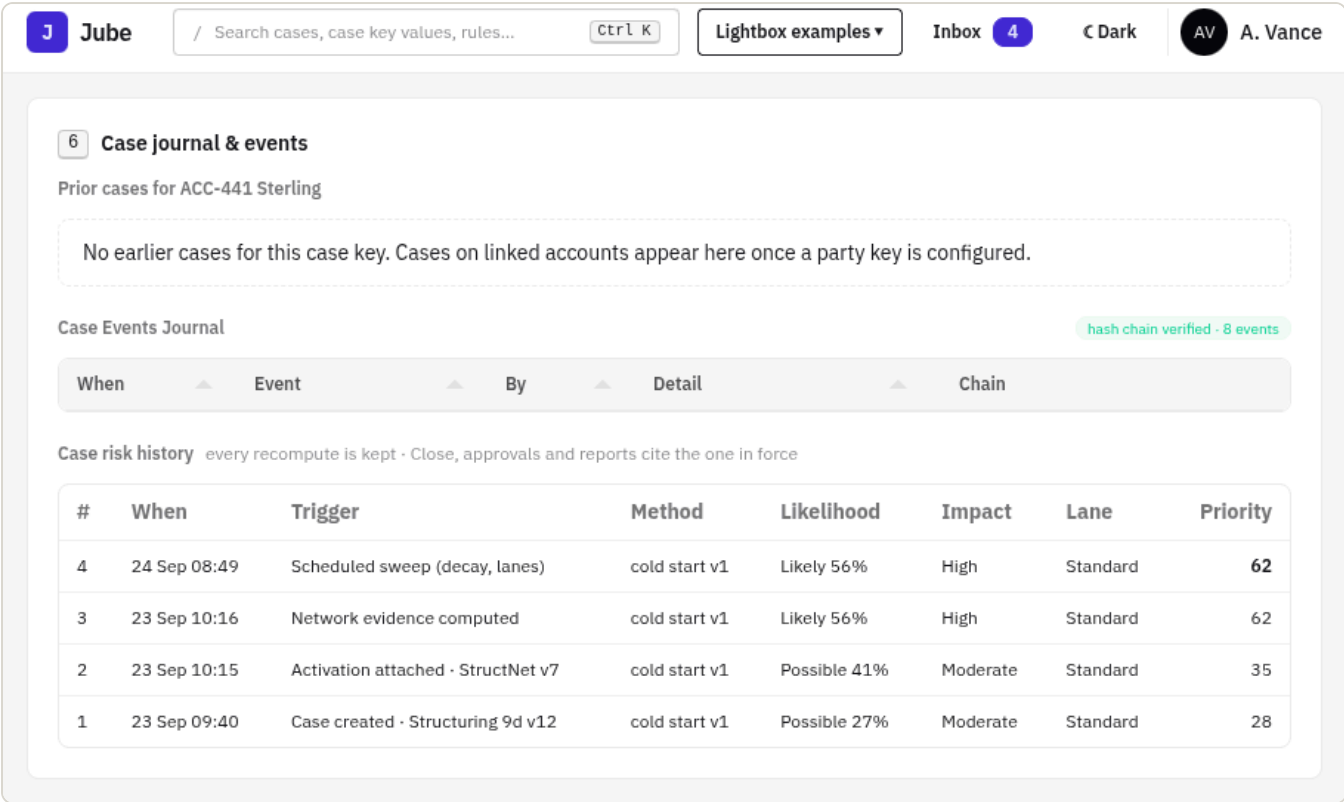


Fig. 13b-risk-history · Case risk history

Prior cases (empty state), the typed Case Events Journal with its hash-chain badge (now including CaseRiskRecomputed), and the **case risk history**.

Interaction	Does	Call	Status
Events	Typed events, operation ids	GET /api/CaseEvent (S6-02)	Extend
Hash-chain badge	Verify the chain	GET /api/CaseEvent/Verify (S6-03)	New
Risk history	Every CaseRiskAssessment	GET /api/Case/{id}/Risk/History (S6-05)	New

14.2 Read audit

Every view of a case is recorded as a CaseViewed event, with controls around it for sensitive accounts.

- **What is recorded:** case open, peek, transaction card, raw payload, customer data reveal, export, print, and opening a case from search. Each record has who, when, from where (screen) and why (if asked).
- **Sensitive accounts:** an account can be marked Sensitive (staff, related to staff, VIP, PEP). Opening a case on one, when it is not assigned to you or your team, asks for a reason first ("Assigned by supervisor", "Linked case", "QA review", other with text). This is break-glass: it never blocks, it records.
- **Viewed by:** in the case history (14.1), a "Views" filter lists who looked, when and why. Supervisors and the MLRO only.
- **Unusual viewing:** a Team view tile flags views outside assignment, after hours, or of many Sensitive accounts, for the supervisor to review.
- **Retention:** view records are kept for a tenant-set period (default 24 months), then aggregated.
- **Relation to conflict of interest (specification 8.1):** conflict of interest stops a related person from working a case; the read audit records anyone who looks. Both are needed.

Interaction	Does	Call	Status
Views recorded	One event per view	<code>CaseEvent</code> type <code>CaseViewed</code> with <code>surface</code> and <code>reason</code>	Extend
Reason prompt	Asked on Sensitive accounts outside assignment	Returned by CH-00 as <code>requiresViewReason</code> ; answer via CG-50 <code>POST /api/Case/{id}/ViewReason</code>	New
Viewed by	The views list for supervisors	<code>GET /api/CaseEvent?caseId=&type=CaseViewed</code> (S6-01 filter)	Extend
Unusual viewing tile	Flags for review	CG-51 <code>GET /api/Team/ViewAnomalies</code>	New

15. Operations

Every change to a case is an operation: previewed, confirmed, then executed exactly as previewed.

15.1 Operation lightboxes

Every lightbox opens with a server Preview and submits with Execute (22.13). They re-preview only when an input that changes the consequences changes.

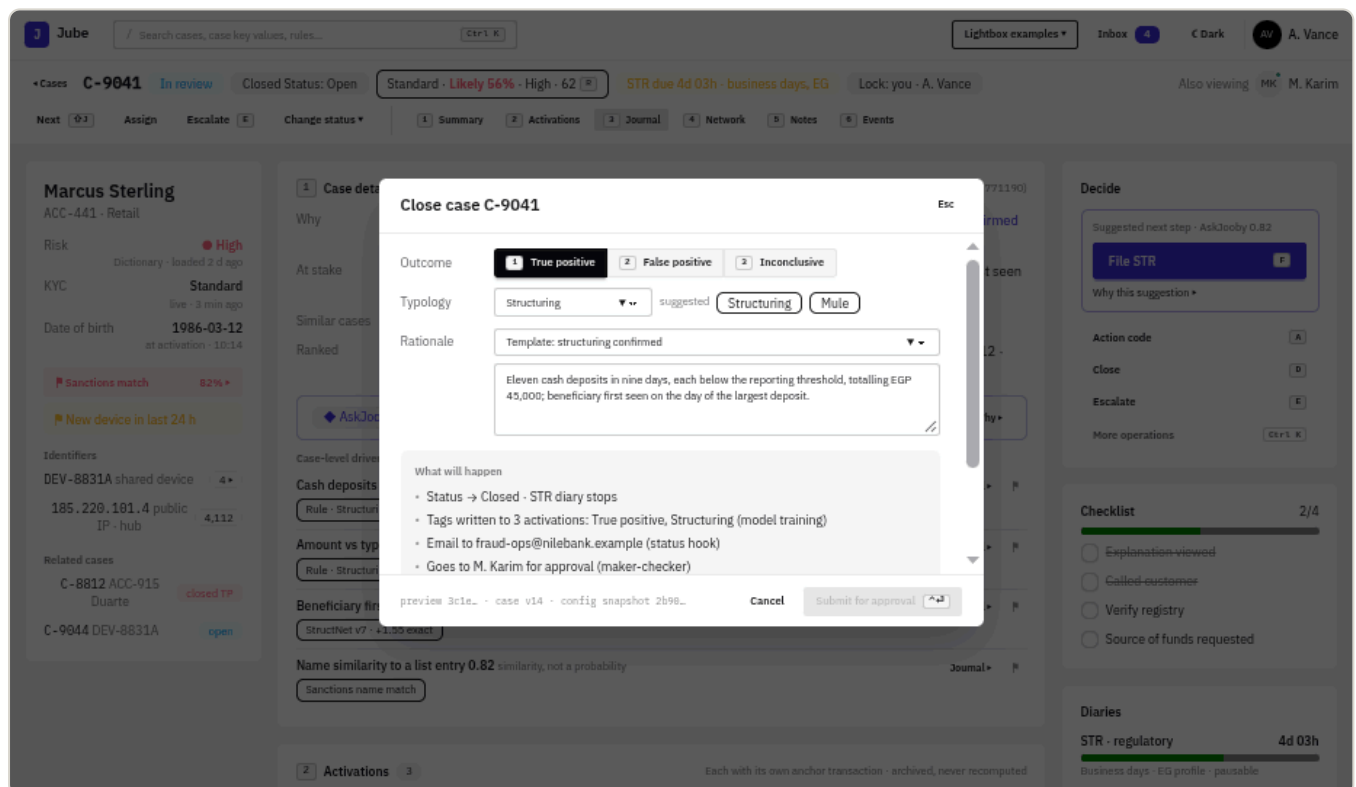


Fig. 17-close-lightbox · Close

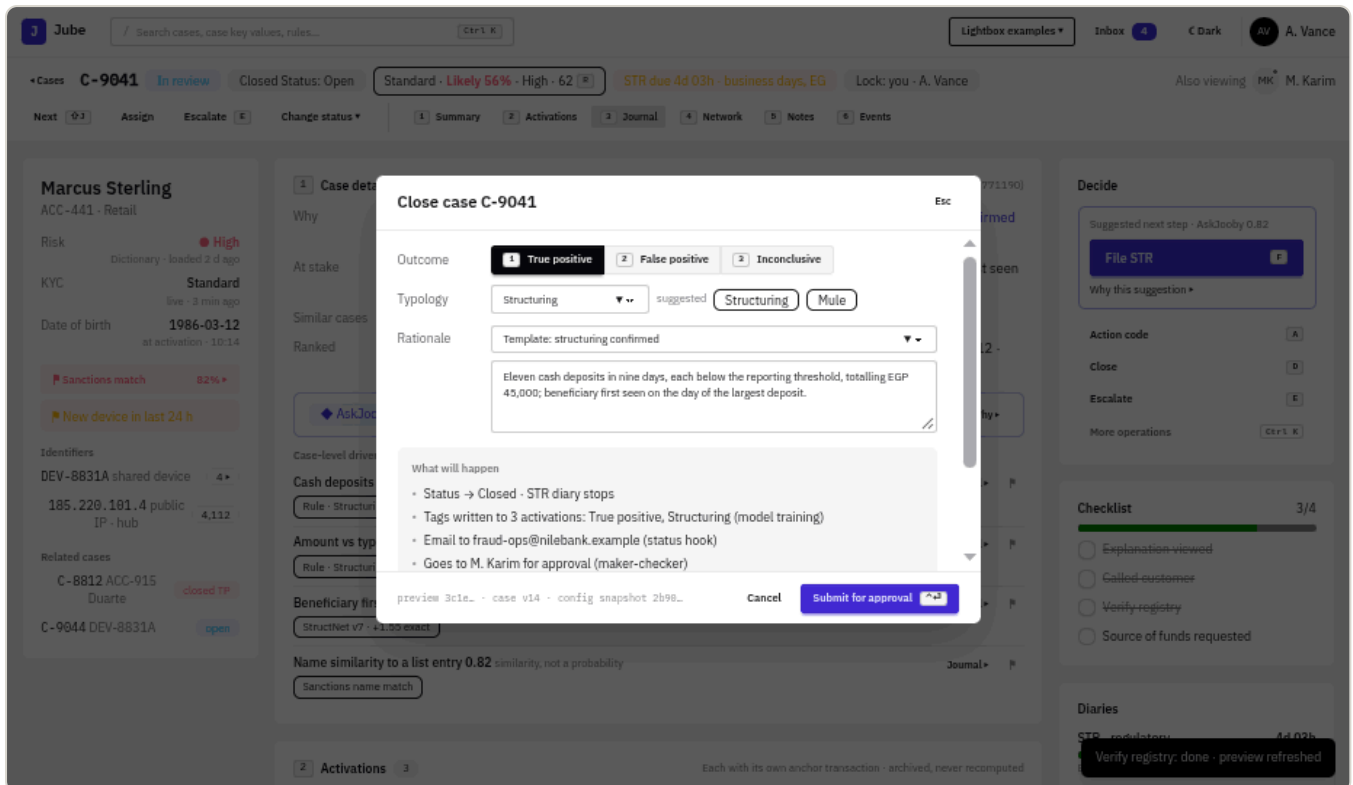


Fig. 18-close-ready · Close ready

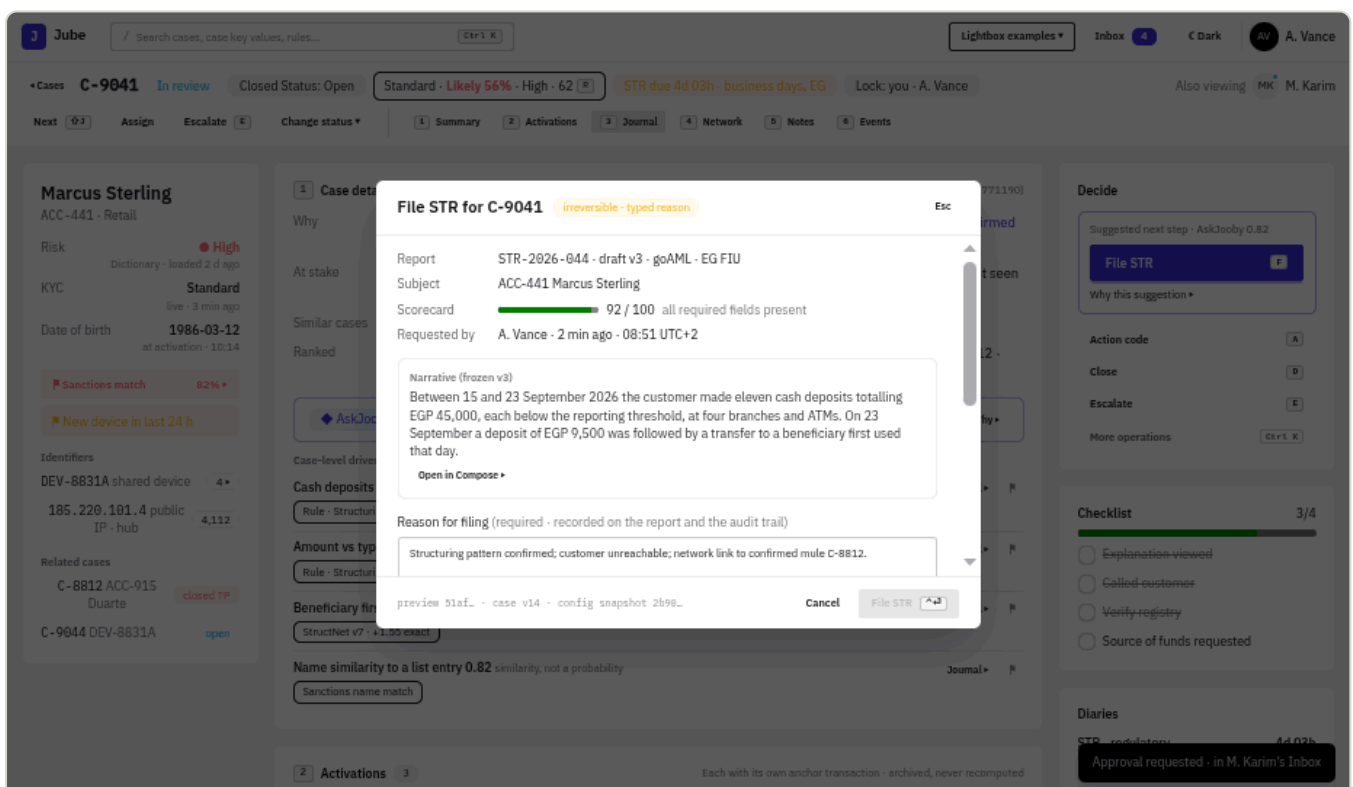


Fig. 19-file-str · File STR

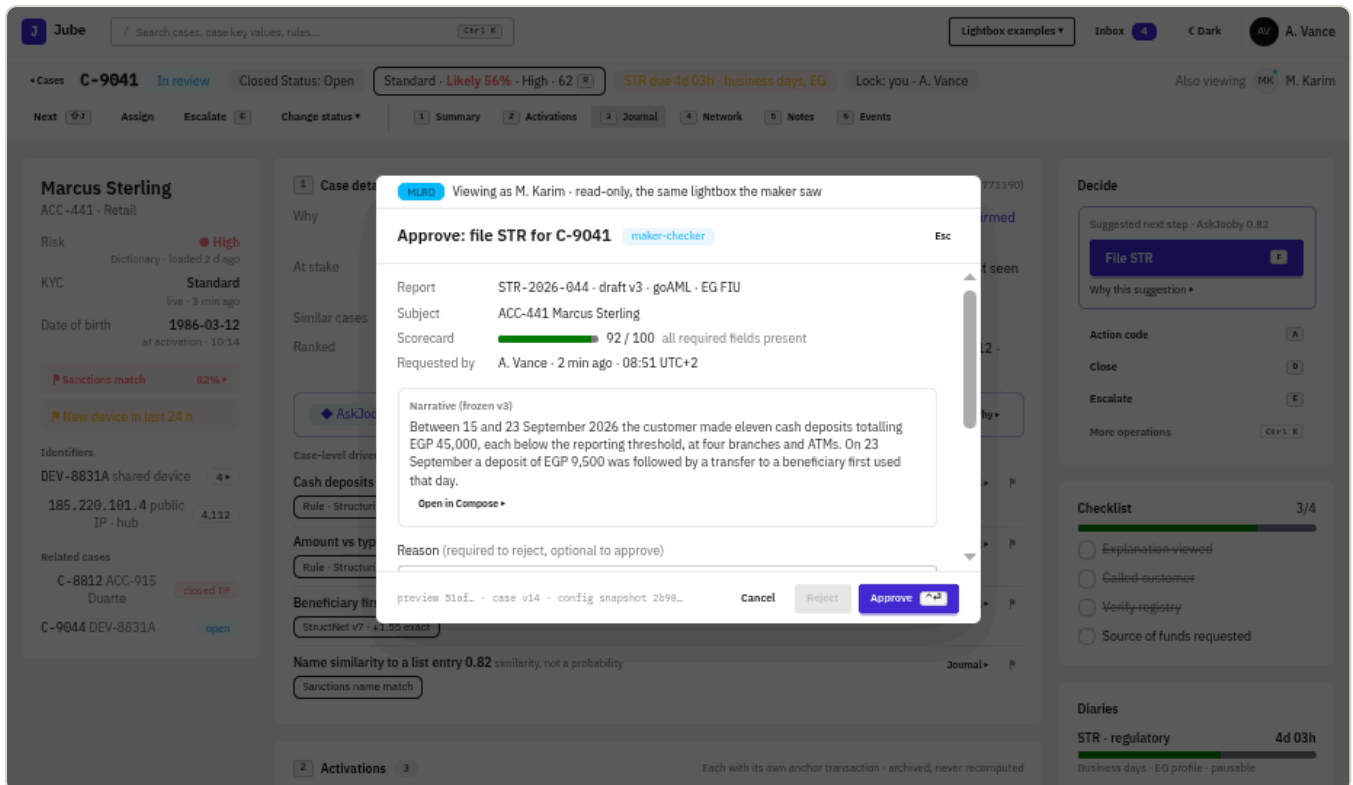


Fig. 20-approver · Approver

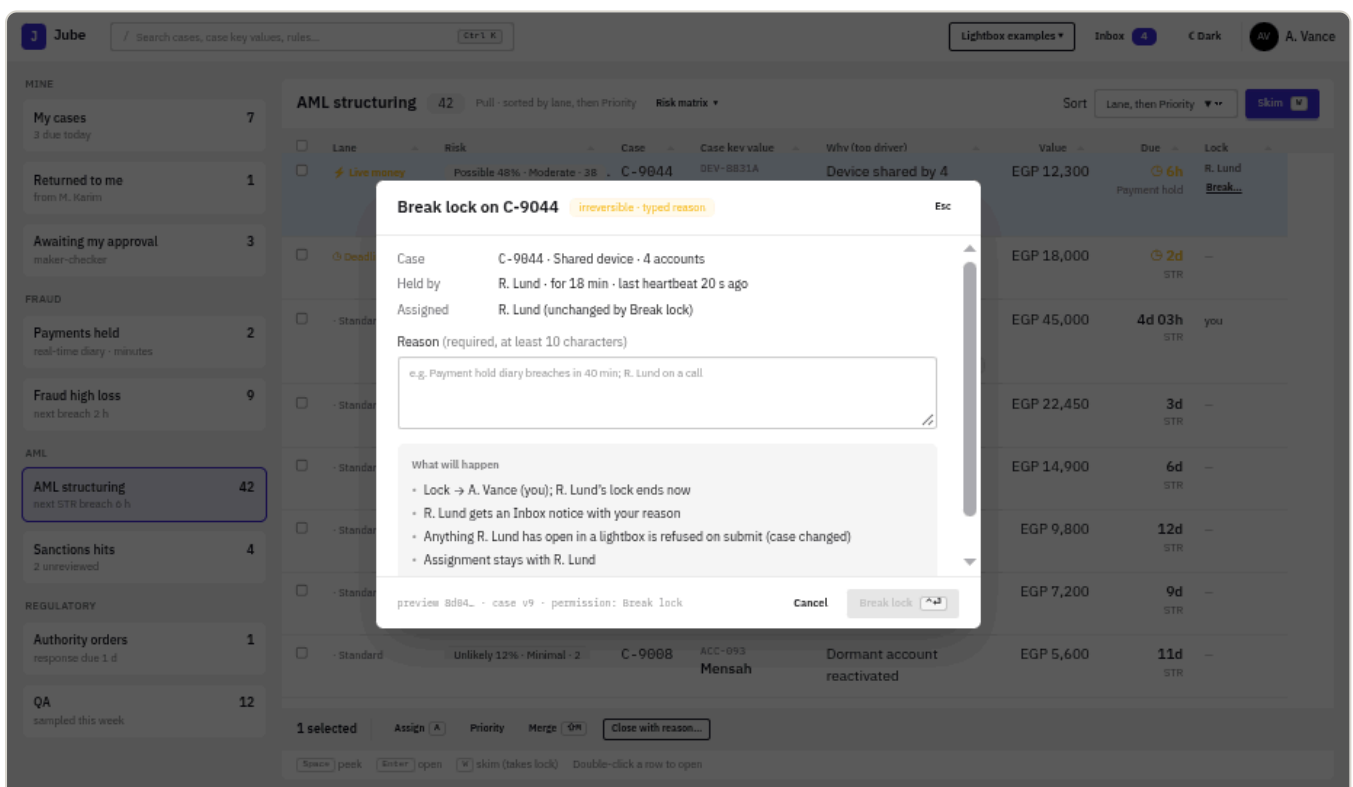


Fig. 21-break-lock · Break lock

Lightbox	Opens from	Calls	Status
Close (with "Do it now")	D , cockpit	POST /api/CaseOperation/Close/Preview , /Execute ; /Case/{id}/TypologySuggestions ; rationale templates (LB-C). Close cites the CaseRiskAssessment in force.	New
File STR (typed reason)	F , suggested step	Preview/Execute; blocked until approved; Op: RequestApproval (LB-F, LB-RA)	New
Approver's view	M. Karim's Inbox	GET /api/CaseOperation/Approval/{id} ; Op: Approve / Reject (LB-A)	New
Break lock (typed reason)	Lock column, peek	Op: BreakLock (LB-BL)	New
Bulk close	Bulk bar	Preview with caseIds[] (LB-B)	New
Step-up	Any, when required	POST /api/Authentication/StepUp (LB-06)	New

15.2 State catalogue

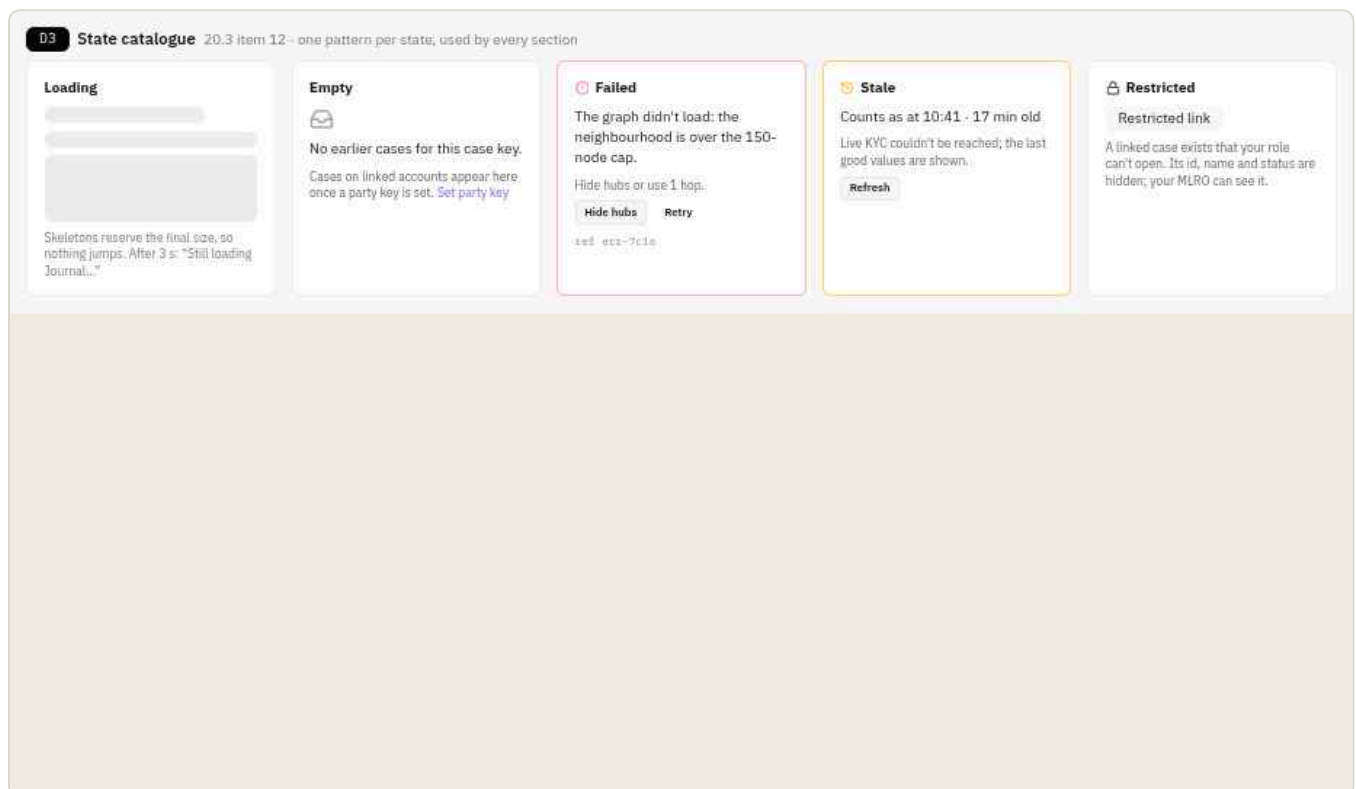


Fig. 41-D3-state-catalogue · Loading, empty, failed, stale, restricted

One pattern for each state, used by every section:

- **loading:** a skeleton the size of the final content;
- **empty:** says what to do next;
- **failed:** says how to fix it, with a reference;
- **stale:** shows the time of the last good values;
- **restricted:** a "restricted link", with no details.

16. Payments: holds, release and refuse

The design for a transaction whose state is **held**: how it appears, how an analyst decides it, how re-authentication sits inside the decision, and how the result is reported. The spec lists the operations (5.4.1 Mitigation, 11 Payment decisions, J1) and step-up (10.2), but neither had been designed.

16.1 The held payment card

The screenshot displays the Jube AML structuring interface. On the left, a sidebar lists various categories: MINE (My cases, Returned to me, Awaiting my approval), FRAUD (Payments held, Fraud high loss), AML (AML structuring, Sanctions hits), and REGULATORY (Authority orders, QA). The main panel shows a table of AML structuring cases. The first case, C-9044, is highlighted and shows details: 'Live money', 'Possible 48% - Moderate - 3B', 'DEV-8831A', 'Shared device - 4 accounts', and 'Device shared by 4 accounts, 1 confirmed TP'. A right-hand panel provides a detailed view of the selected case, including a 'Shared device - 4 accounts' section with a 'Why' section explaining the device sharing. Below this, there's a 'Decide payment...' button and a note about missing inputs. The bottom of the interface shows a '1 selected' status and various action buttons like 'Assign', 'Priority', 'Merge', and 'Close with reason...'.

Fig. 22-held-payment-card · Held payment card

On a case in the **Live money** lane, the peek panel (and the top of Case detail views) shows the held transaction first, because it is the only thing on the case with a clock measured in hours. It shows the payment, who from and to, and what held it. It shows whether the payment system has confirmed the hold, the time left, and **what happens if nobody decides**.

Interaction	Does	Call	Status
Card loads	The held transaction, its hold record and live status	Proposed <code>GET /api/Case/{id}/PaymentHolds</code> (inside CH-00 for the first paint)	New
Status line	Whether the payment system confirmed the hold, from its synchronous HTTP response, read from the execution log	Inside <code>GET /api/Case/{id}/PaymentHolds</code>	New
Countdown	Minutes diary (<code>CaseDiary</code> , type Payment hold)	CH-00 / <code>CaseHub.PaymentHoldChanged</code>	New
Decide payment... (H)	Opens the lightbox	Op: <code>DecidePayment Preview</code>	New

16.2 The decision lightbox

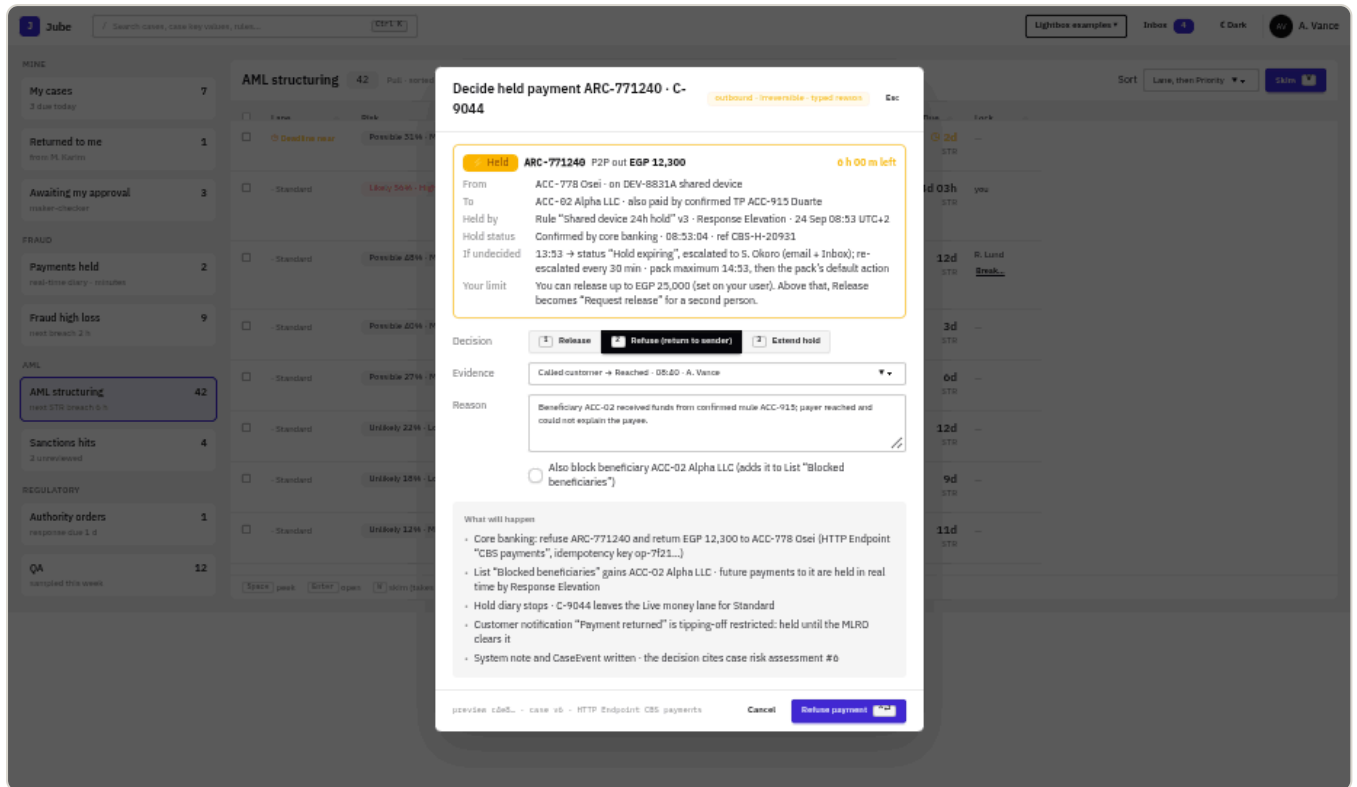


Fig. 23-payment-lightbox · Payment decision lightbox

One lightbox, three decisions, keys 1 – 3 : **Release**, **Refuse (return to sender)**, **Extend hold**. It asks only what the operation needs:

- the decision;
- the evidence behind it (a coded note, for example "Called customer → Reached");
- a typed reason;
- for Refuse, whether to block the beneficiary as well.

The "What will happen" block comes from the server and changes with the decision. It names the HTTP Endpoint and idempotency key, the List change, the diary and lane, the tipping-off check on any customer notification, and the case risk assessment the decision cites.

Interaction	Does	Call	Status
Choose a decision / extend by	Re-preview (a consequence input)	POST /api/CaseOperation/{ReleasePayment}	RefusePayment ExtendHold}/Preview New
Evidence select	Links the coded note that justifies it	GET /api/CaseNote?caseId= (already loaded)	Exists
Also block beneficiary	Adds Op: BlockIdentifier to the same execution (all-or-nothing)	Preview includes it	New
Submit (↵)	Step-up if needed, then Execute	POST /api/CaseOperation/{op}/Execute with stepUpToken	New

16.3 Step-up inside the lightbox

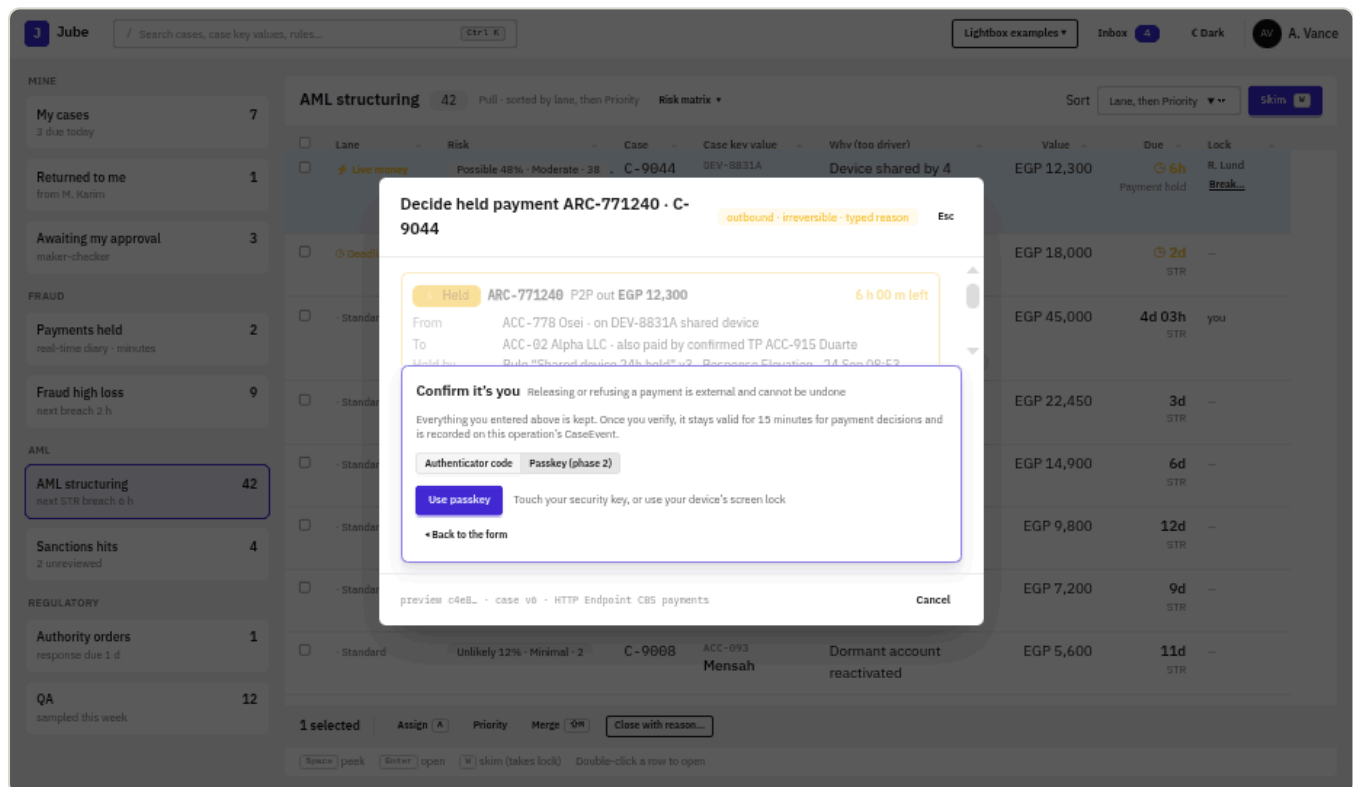


Fig. 24-step-up-passkey · Step-up with passkey

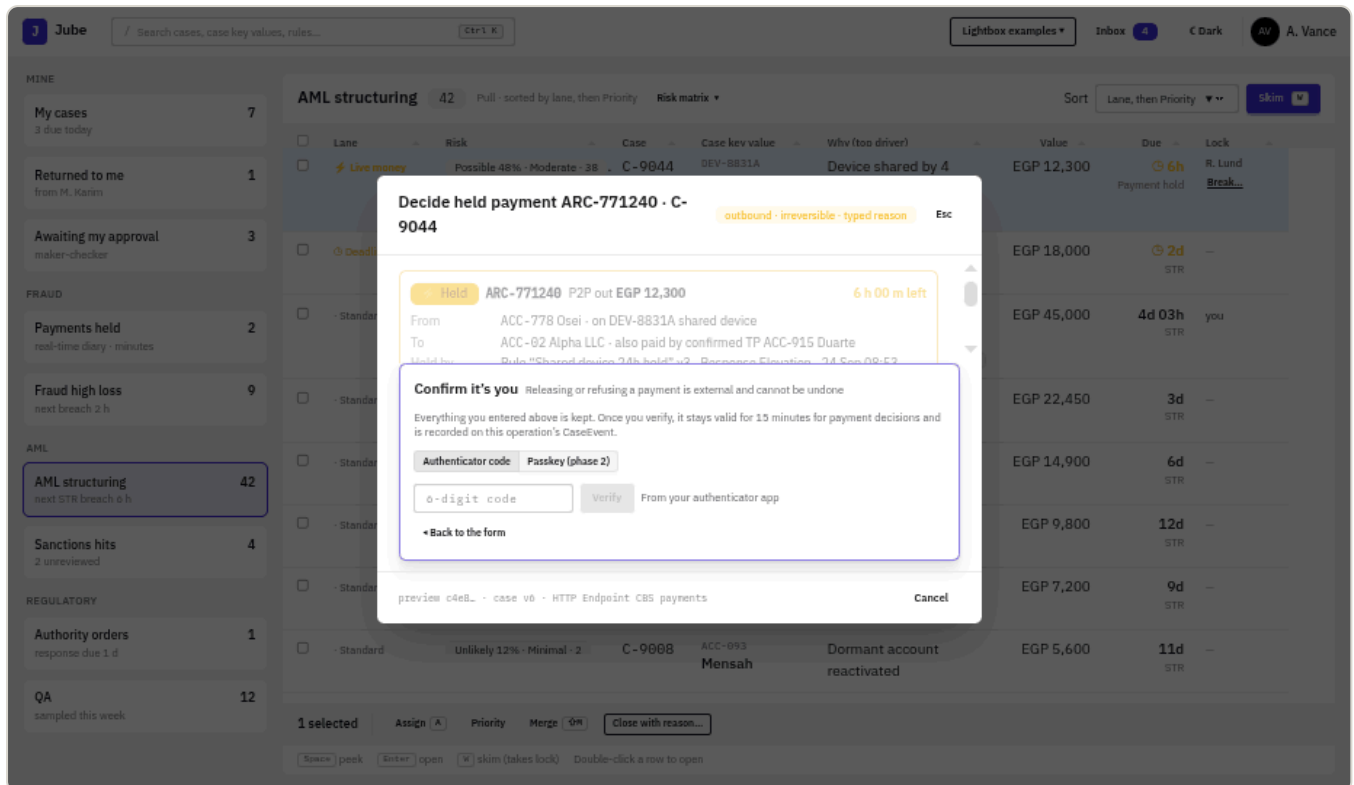


Fig. 25-step-up-code · Step-up with a code

Submitting an operation that needs re-authentication does not open a new window. A panel appears inside the same lightbox, and everything entered stays visible but inactive above it. The panel offers the methods enabled for the user: authenticator code (phase 1) and passkey (phase 2). There is no SMS. "Back to the form" returns with every input intact. A successful step-up is valid for 5 minutes (15 minutes for payment decisions) for that user (so M. Karim approving, then A. Vance filing, each step up once) and is recorded on the operation's `CaseEvent`.

Operations that ask for it:

- from 8.2: File, Approve, Break lock;
- Release and Refuse payment. Extend hold does not ask, because no money moves.

Interaction	Does	Call	Status
Panel opens	Server says step-up is required (Execute answers 401 with <code>step_up_required</code> , or Preview flags it)	LB-06	New
Choose a method	Starts the challenge (TOTP prompt, or WebAuthn options)	Proposed <code>POST</code> <code>/api/Authentication/StepUp/Begin {method}</code>	New
Use passkey / Verify	Completes it; returns a short-lived <code>stepUpToken</code>	Proposed <code>POST</code> <code>/api/Authentication/StepUp/Complete</code>	New
Continue	Execute carries the token; the lightbox proceeds without re-entry	LB-04	New

16.4 Honest result

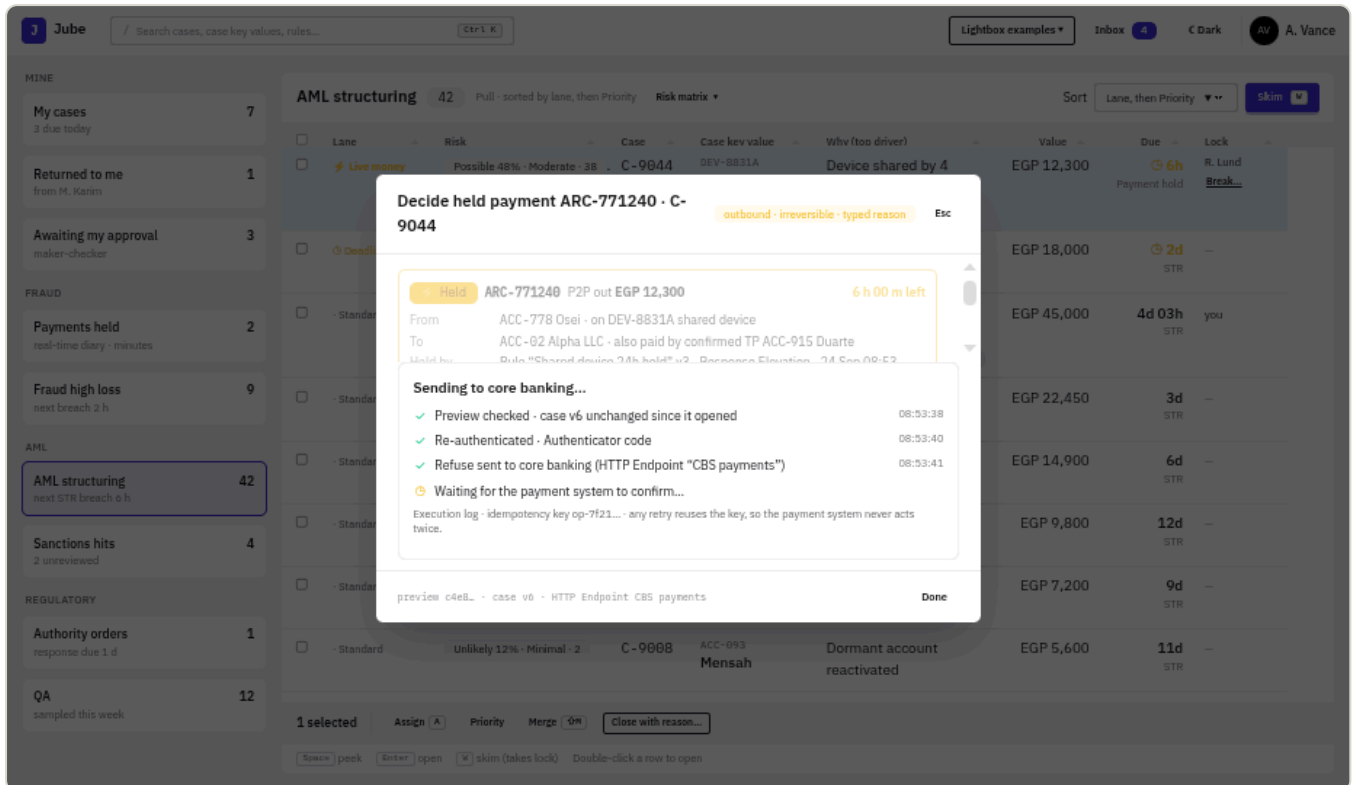


Fig. 26-payment-sending · Sending

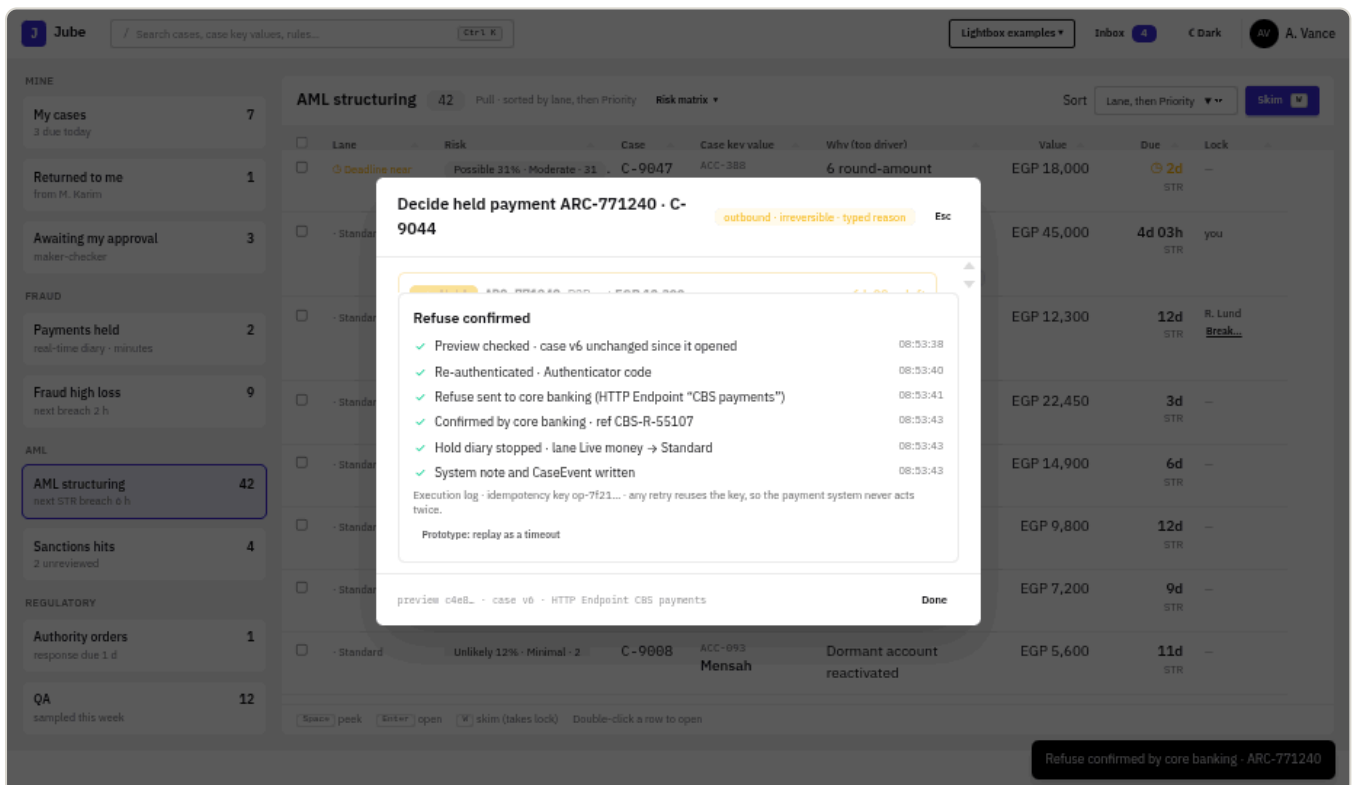


Fig. 27-payment-confirmed · Confirmed

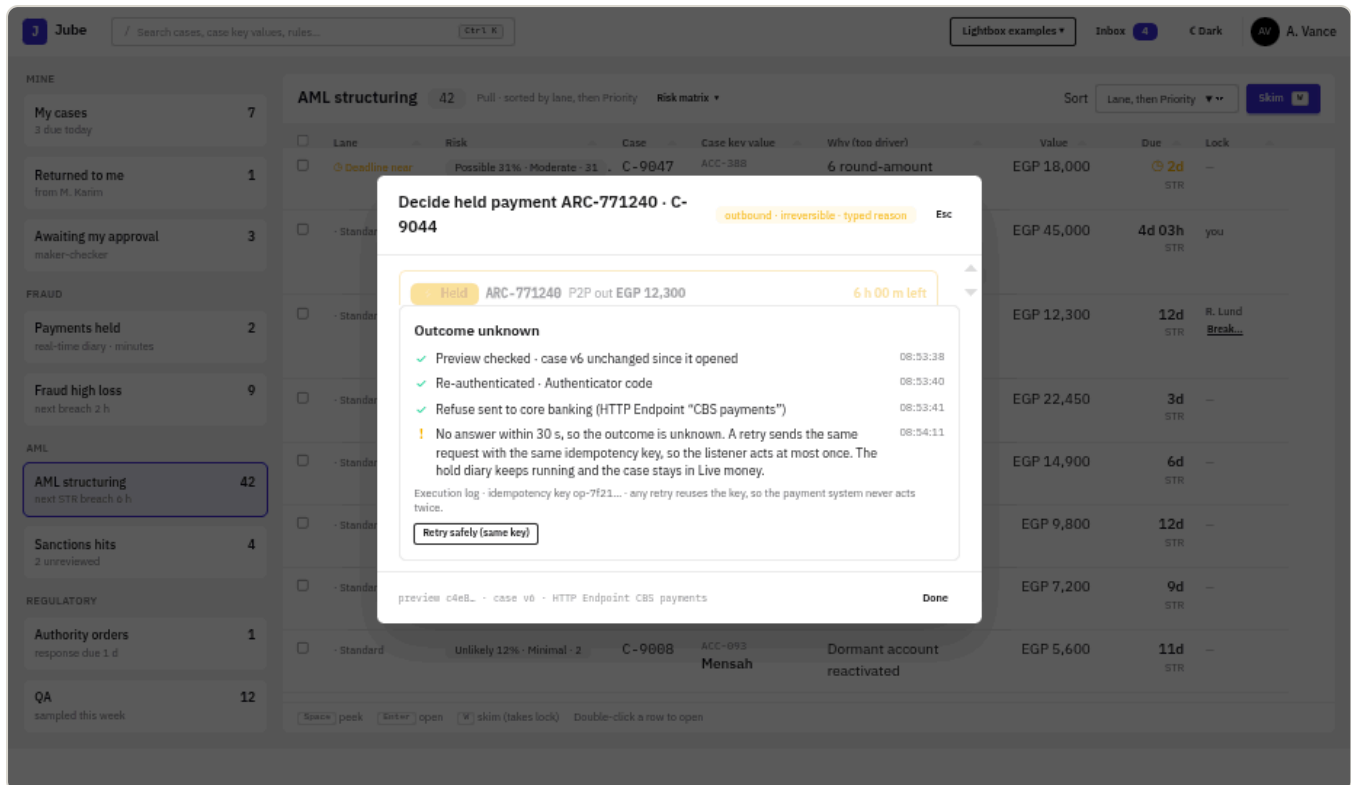


Fig. 28-payment-timeout · Timeout: outcome unknown

Because the call leaves Jube, the lightbox does not simply close on Submit. It shows the steps as they happen:

1. preview checked;
2. re-authenticated;
3. sent to core banking;
4. the payment system's own confirmation and reference, then the diary and lane change and the system note.

If the payment system does not answer, the lightbox says **"Outcome unknown"**. It does not report failure, because the payment may already have moved. The case stays in Live money. "Retry safely" re-sends the same request with the same idempotency key, so the listener acts at most once.

Interaction	Does	Call	Status
Confirmation arrives	The synchronous HTTP response is the confirmation	Dispatcher HTTP Endpoint + execution log	Exists + Extend
Retry safely	Re-sends with the same idempotency key	Op: {same op}/Execute, same key	New
Result recorded	System note, CaseEvent , lane change, CaseRiskChanged push	Execute + worker	New

16.5 Rules for every hold

- **Nobody decides, it escalates.** Before the hold ceiling (default 60 minutes, set per market), the status becomes **Hold expiring**, the supervisor is emailed with a deep link, and the escalation repeats every 30 minutes until someone acts. Only at the legal maximum does the market's default apply (for the UK: release, unless there is evidence to refuse).
- **Step-up on Release and Refuse**, because both move money irreversibly. Extend hold does not need it.

- **Per-user release limit.** Each user has a release limit with a currency. Above it, Release becomes **Request release**, and a second user whose limit covers the amount approves it with step-up. Refuse has no limit, because it is the safe direction.
- **Extensions:** no count limit, but a time ceiling from the market's hold policy. Each extension records a reason and a next step.
- **Confirmation** is the payment system's synchronous answer. On timeout the outcome is unknown, and "Retry safely" re-sends with the same idempotency key; the listener treats a repeated key as the same request (default timeout 30 s).
- **Step-up methods:** an authenticator code first, then passkeys as the phishing-resistant option. Tenants signing in through their own identity provider step up with a fresh provider login. No SMS. A step-up lasts 5 minutes, and for payment decisions it is bound to the exact decision previewed: a changed amount, payee or decision needs a new step-up.
- **Payer told about the hold:** where the market requires it, the notice goes out automatically through the dispatcher, subject to the tipping-off check, and the card shows "Payer notified 08:55 by SMS" or "Not yet sent: due by end of 25 Sep".
- **Payment system unavailable:** the lightbox shows "Payment system unavailable since 08:41" and disables Submit. Decisions are never queued; the hold diary keeps running and the supervisor escalation starts early.
- **No bulk Release.** Refuse can be bulk only for payments to the same beneficiary, with one reason.
- **Timers are accessible:** step-up expiry warns 60 s before with "Keep verified"; hold countdowns announce politely at 1 h and 15 min, not every second; nothing relies on colour alone.

16.6 Hold expiring email, approver's release, step-up enrolment

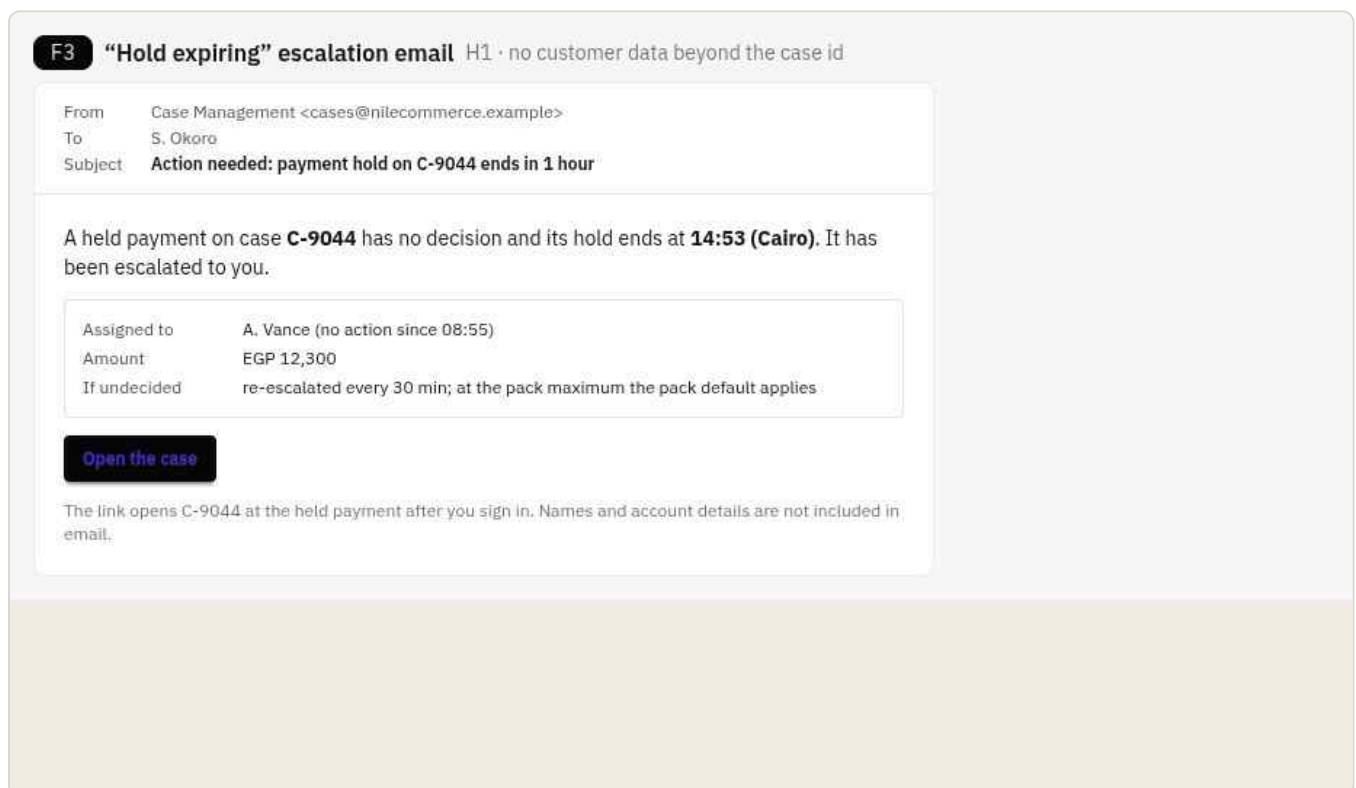


Fig. 47-F3-hold-email · Hold expiring email

F4 Approver's view of Request release H3 · above the maker's limit

Approve release · C-9046 maker-checker · step-up

Payment ARC-771301 · P2P out **EGP 38,000** · ACC-310 Nasser → ACC-77 Delta Imports

Requested by R. Lund · limit EGP 25,000 · 13:12

Their reason "Customer confirmed on recorded call-back; invoice INV-5521 matches."

Evidence Called customer → Reached · 13:05 · upload INV-5521.pdf (sha256 a1c4...)

Your limit EGP 100,000 · covers this

Hold left **2 h 40 m**

Reason (required to reject)

On approve: step-up (authenticator code), then Release is sent to core banking under your name as approver and R. Lund's as maker.

CancelRejectApprove release

Fig. 48-F4-approve-release · Approve release above the maker's limit

F5 Step-up enrolment and recovery codes H6 · user settings · authenticator first, passkey in phase 2

Authenticator app step 2 of 3

Scan with any authenticator app (Microsoft, Google, 1Password...).

QR code

Can't scan? Key: JBUS 4Q2X 7KDP ...

Enter the 6-digit code to confirm

Confirm

Passkey · available in phase 2

No SMS option. If your tenant signs in through its own identity provider, step-up is a fresh sign-in there instead.

Recovery codes step 3 of 3

Each code works once, if you lose your phone. Store them somewhere safe; Jube shows them only now.

7F3K-92QD

M8XP-41LA

Q2ZR-6T0N

H5WB-83JC

D9EV-27MU

K4RS-50GY

DownloadCopy

☐ I've stored these codes

Finish

Resetting another user's step-up is an admin operation with its own step-up and CaseEvent-style audit.

Fig. 49-F5-step-up-enrolment · Step-up enrolment and recovery codes

- **The email** carries the case id and a deep link, never customer names or account details.
- **The approver** sees the maker's limit and reason, the evidence, their own limit and the hold time left.
- **Enrolment:** authenticator first, passkey later, no SMS, and six one-time recovery codes.

16.7 Payment hold policy: one row per market

Hold rules are data, not code. Each jurisdiction pack owns rows in a new configuration table, `PaymentHoldPolicy`, edited through the generic DTO form (`[FormEndpoint]`, maker-checker publish, versioned). The hold diary, the "Hold expiring" escalation, the Extend hold ceiling and the payer notice all read the active row for the payment's market. Nothing about any market is hard-coded.

Column	Type	Meaning	UK row (example)	Egypt row
Market	ISO 3166 code + optional scheme (for example GB , GB-FPS)	Which payments the row applies to; the scheme-level row wins over the country row	GB	EG , values from compliance
Direction	Outbound, Inbound or Both	Lets inbound holds have their own rules	Both	from compliance
MaxHold	integer	The ceiling	4	from compliance
HoldUnit	BusinessDays or Hours	How MaxHold is counted; business days use the pack's holiday calendar	BusinessDays	from compliance
HoldClockStart	PaymentReceived or HoldPlaced	When the ceiling starts counting	PaymentReceived	from compliance
OnMaxHold	Release, Refuse or EscalateOnly	What happens at the ceiling with no decision. EscalateOnly means no automatic action, and the case stays escalated until someone decides	Release	from compliance; the safe default until known is EscalateOnly
EscalateBefore	minutes	When the status becomes "Hold expiring" and the supervisor is emailed	60	60
ReEscalateEvery	minutes	How often the escalation repeats	30	30
PayerNoticeEnabled	boolean	Whether a payer notice is sent. Optional per market	true	false until compliance says otherwise
PayerNoticeDue	integer + unit	How soon after the hold starts it must be sent	1 BusinessDay (end of the next business day)	—
PayerNoticeChannel	SMS, Email, App or the customer's preferred channel	How it's sent, through the dispatcher	Customer preferred	—
PayerNoticeTemplateId	FK	The message, which is subject to the tipping-off check	"Payment paused"	—
EffectiveFrom , EffectiveTo	dates	Rule changes take effect on a date without a release; holds already running keep the row they started under	30 Oct 2024 →	—
Source	text	Which regulation or internal policy the values come from, for audit	PSR 2017 as amended 2024; FCA guidance	—

Rules:

- If no row matches a payment, the hold is still placed, and a config warning shows on the Team view. The hold defaults to **EscalateOnly**, with no ceiling and no notice. Jube never invents a legal limit.
- The held payment card shows the row that applies, for example "Pack GB · 4 business days from receipt · release at ceiling · notice sent 08:55".
- Changing a row is a configuration change: it needs maker-checker approval, is recorded as an event, and appears in Pending changes.

New endpoints: CG-24 `/api/PaymentHoldPolicy` (generic DTO CRUD with Schema), and CG-25 `GET /api/PaymentHoldPolicy/Resolve?market=&direction=&at=`, used by the hold worker and the held payment card.

17. Payments: inbound holds, recall and payee checks

The same card, lightbox, step-up and honest result as section 16, extended to money arriving at mule accounts, money that has already left, and the payee name check made before payment. Every external clock is a diary, so it sorts the lanes and escalates like any other.

17.1 Inbound holds

Why: UK payment-delay legislation covers outbound payments only. FCA guidance (FG24/6) explains how a PSP may delay crediting a suspicious inbound payment under its existing financial crime obligations, and expects it to talk to the payee unless that would be unlawful (tipping off). The mule account is where networks are caught.

Design:

- **Direction chip** at the top of the held payment card: "Inbound → ACC-02 Alpha LLC" or "Outbound ← ACC-01". The direction also shows in the Cases page Why column ("Inbound hold · 3 h left").
- **Decisions (keys 1–3): Credit to account, Return to sender, Extend hold.** A fourth, **Credit and hold outbound**, credits the payment but places a time-boxed outbound hold rule on the receiving account (default 24 h), so money that is onward-forwarded within minutes (the mule pattern) is caught without refusing a payment that may be genuine.
- **Return to sender** sends the return through the dispatcher and offers to notify the sending PSP with a minimised fraud notice. It needs step-up, like Refuse.
- **Payee contact:** for inbound holds, the payee notice is **off by default** because the payee is the suspect. Turning it on runs the tipping-off check (16.5) and records the result.
- **Consent regime:** where a suspicious activity report with a consent request is filed (for example a UK DAML), the hold diary follows the report's notice and moratorium periods from the jurisdiction pack, and the card says so ("Held under consent request · notice period ends 9 Oct").
- **Network link:** the card links the sender as a Network node. If the same sender has paid other held or flagged accounts, the card says "Sender also paid 3 accounts in this network".

Interaction	Does	Call	Status
Card loads	Hold with <code>direction</code> , sender and receiver, policy row	<code>GET /api/Case/{id}/PaymentHolds</code> returns <code>direction</code>	Extend
Policy	The inbound row for the market (<code>Direction = Inbound</code>)	<code>CG-25 PaymentHoldPolicy/Resolve?direction=Inbound</code>	Exists (designed)
Credit to account	Releases the inbound hold	Op: CreditInbound Preview/Execute	New
Credit and hold outbound	Credits, then adds a time-boxed outbound hold rule on the account	Op: CreditInbound with <code>holdOutboundHours</code>	New
Return to sender	Returns the funds; optional sender-PSP notice	Op: ReturnInbound (+ Op: NotifyCounterpartyPsp)	New
Extend hold	Same as outbound, ceiling from the inbound row	Op: ExtendHold	Exists (designed)

17.2 Recall: the payment has already left

Why: on instant rails the payment usually completes before anyone looks. In SEPA, the originator's bank sends a recall (camt.056). For the reason "fraudulent origin" it can do so for up to 13 months; for duplicates and technical errors, 10 banking days. The beneficiary bank must answer within 15 banking days, either returning the funds (pacs.004) or refusing with a reason (camt.029). UK and other schemes have their own channels, so the rules sit in a table per scheme.

Outbound recall (we sent it):

- **Request recall** appears on any executed outbound transaction: in the transaction card, in the Journal row menu, and as the suggested operation in the cockpit when a case's suspect payment has already settled.
- **Lightbox:** the reason, offered from the scheme row (for SEPA: Fraud, Duplicate, Technical); the amount (full, or partial where the scheme allows); the receiving bank (from the payment); the deadline to send ("Fraud recall possible until 4 Nov 2027"); and a coded note as evidence. "What will happen" names the message, the diary for the answer and any customer notice. It needs no step-up, because no money leaves.
- **Recovery card** in Case detail views, one per recall: Sent → Acknowledged → **Returned** (full or partial, with the amount) or **Refused** (reason) or **No answer by the due date** (escalates to the supervisor, offers "Chase" and records it). The card never says "recovered" until the return has been credited.
- **One recall per payment.** A second request on the same payment is blocked, as the schemes reject duplicates.

Inbound recall (we are the receiving bank):

- A recall received for a payment credited to one of our accounts **opens or joins a case on that account**, in the Deadline near lane, with a diary for the answer (SEPA: 15 banking days).
- **Recall request card:** who asked, the payment, the reason, the answer due, and the **available balance now**, with how much has already left the account and where (linked to the Journal).
- **Decisions:** **Return funds** (full, or partial up to the balance), **Refuse with reason** (no funds, account closed, legal reason, customer refused where consent is needed), **Ask the customer** (where national law requires consent, using the RFI flow, section 20.3). Return needs step-up.
- **Signal:** a fraud recall against an account feeds the models (`InboundFraudRecallCount`) and adds the account to the case's Network as a suspected mule.

Interaction	Does	Call	Status
Request recall	Preview then send through the dispatcher	Op: RequestRecall Preview/Execute	New
Recall rules	Reasons, windows and response time for the scheme	CG-40 GET /api/RecallSchemeRule/Resolve? scheme=&reason=	New
Recovery card	Status of every recall on the case	CG-41 GET /api/Case/{id}/Recalls (inside CH-00)	New
Answer arrives	Status moves, diary closes, system note	Dispatcher inbound endpoint → CG-42 POST /api/Recall/{id}/Response	New
Chase	Records a chase and resets the reminder	Op: ChaseRecall	New
Recall received	Opens or joins a case on the receiving account	CG-42 (inbound message) + case creation rule	New
Answer an inbound recall	Return funds, refuse, or ask the customer	Op: AnswerRecall {return, refuse, askCustomer}	New

17.3 Payee name checks (Verification of Payee, Confirmation of Payee)

Why: since 9 October 2025, euro-area PSPs must check the payee name against the IBAN before a euro credit transfer. The EPC scheme returns Match, Close match (with the account holder's name), No match, or Check not possible. The UK Confirmation of Payee codes are finer: they also report an account-type mismatch (business or personal), opted-out accounts and switched accounts. The EU Payment Services Regulation, agreed in November 2025, extends the check to all credit transfers and moves the loss to the payer's PSP if it fails to warn. A payer who goes ahead after a No match is one of the strongest scam signals.

Design:

- **One normalised record** on each transaction: `PayeeCheck { scheme, result: Match | CloseMatch | NoMatch | NotPossible, reasonCode, nameEntered, nameReturned, accountTypeMismatch, warningShown, payerProceeded, checkedAt }`. Raw scheme codes (EPC, or CoP codes such as ANNM, MBAM, BANM, PAMM, OPTO, CASS) are kept and shown on hover.
- **Payee check chip** on the held payment card, the transaction card and as an optional Journal column: an icon and words, never colour alone ("No match · payer went ahead 2 min later"). Close match shows both names side by side.
- **Case detail views line:** "Payee check: No match (warned 10:12, sent 10:14)" when the case's anchor payment has a non-match.
- **Model inputs:** `PayeeCheckResult`, `PayerProceededAfterWarning`, `SecondsFromWarningToSend`, `NameSimilarity`. They are offered to model authors as standard features, with their meaning documented in the model facts drawer.
- **Receiving side:** when we answer payee checks for our own accounts, the count of No match and Close match answers against an account in 24 h is a mule signal: "11 payers were warned about this account today" appears in the case key panel of a case on that account.
- **Evidence:** the claim view (18.1) shows the payee check and whether the warning was shown, because that decides liability under the EU rules.

Interaction	Does	Call	Status
Chip and line	The payee check on the transaction	GET /api/Archive/{id}/Card (TC-01) and GET /api/Journal (S3-01) return payeeCheck	Extend
Capture	The payee check arrives with the transaction payload	PayeeCheck fields in the model's request XPath set	Extend (configuration)
Receiving-side count	Checks answered against an account	CG-43 GET /api/Account/{id}/PayeeCheckStats?window=24h	New

18. Claims and customers who need support

When a customer reports a scam, the claim runs against its legal clocks; customers who need support get adjusted treatment throughout.

18.1 APP reimbursement claims

Why: the UK rule covers Faster Payments and CHAPS. The sending PSP must reimburse within **5 business days**, may **stop the clock** to get information it needs, and must reach an outcome within **35 business days**. The cap is £85,000 per claim; an optional excess up to £100 may not be applied to vulnerable customers; the receiving PSP pays half; claims can be made up to 13 months after the last payment. The exceptions are first-party fraud, gross negligence (the consumer standard of caution) and civil disputes. An independent review of the cap, the split and the caution exception runs through 2026/27. The EU Payment Services Regulation adds a refund duty where a fraudster impersonated the PSP and the customer reported it to the police, from about 2027–28.

Claim case: a case type **APP claim**, opened from a case, from Journal rows selected together, from an Inbox referral or from a customer call.

- **Two clocks in the header**, always both visible: **Decision** (5 business days, pausable) and **Outcome deadline** (35 business days, absolute). While paused, the Decision clock shows "Paused 2 d · waiting for customer's bank statements" and a resume condition. The absolute clock never pauses.
- **Stop the clock** needs a reason category and what is being waited for. Sending an RFI (20.3) with "Stop the clock" ticked pauses it, and the customer's reply resumes it automatically.
- **Payments in scope:** one or more outbound payments, picked from the Journal. The panel shows each with its scheme, receiving PSP, payee check, and the hold decision if there was one (so a payment released after a hold is visible as such). Payments outside the scheme (international, or same-firm) are shown greyed with the reason.
- **Assessment panel:** claimed amount, cap, excess (automatically 0 if a vulnerability record is active), and the three exceptions as a checklist. Choosing an exception requires linked evidence. **Gross negligence also requires a supervisor's approval** and can never be chosen by AskJooby or an agent.
- **Receiving PSPs:** one row per receiving PSP: notified at, acknowledged, contribution requested, contribution received. Notification is a diary of its own, set from the scheme row.
- **Decide claim:** **Reimburse in full**, **Reimburse in part** (reason per payment), **Decline** (exception and evidence). Reimburse moves money, so it needs step-up and respects the per-user release limit. Decline needs maker-checker.

- **Customer letter:** the outcome letter is composed in Compose (13.2) from the scheme's template and goes out through the dispatcher.
- **Receiving side:** a claim notice from another PSP about one of our accounts opens or joins a case on that account, with a diary for our contribution and the claim as evidence.

****Scheme rules (ReimbursementScheme , one row per scheme):**** Scheme (GB-FPS, GB-CHAPS, EU-PSR-Impersonation), DecisionDays , AbsoluteDays , DayUnit , Cap , MaxExcess , ExcessWaivedIfVulnerable , ReceivingShare , ClaimWindowMonths , NotifyReceivingWithin , Exceptions[] , EffectiveFrom/To , Source . Edited like PaymentHoldPolicy ; open claims keep the row they started under.

Interaction	Does	Call	Status
Open claim	Creates the claim case with selected payments	Op: OpenClaim	New
Claim panel	Payments, clocks, receiving PSPs, assessment	CG-44 GET /api/Claim/{caseId} (inside CH-00 for claim cases)	New
Scheme rules	Clocks, cap, excess, share for the scheme	CG-45 /api/ReimbursementScheme (DTO CRUD) and /Resolve	New
Stop / resume the clock	Pauses or resumes the Decision diary	Op: StopClock {reason, awaiting} · Op: ResumeClock	New
Notify receiving PSP	Sends the notice, starts their diary	Op: NotifyReceivingPsp	New
Decide claim	Reimburse (step-up, limit) or Decline (maker-checker)	Op: DecideClaim	New
Contribution	Requests or records the receiving PSP's share	Op: RequestContribution · Op: RecordContribution	New
Claim register	Export of claims, clocks and outcomes	CG-46 GET /api/Claim/Register?from=&to=	New

18.2 Customers who need support

Why: the FCA treats vulnerability as a spectrum of risk, driven by health, life events, resilience and capability. Firms are expected to record customers' needs so they can be found at the next contact, review the records, and monitor outcomes for vulnerable customers against others; its 2025 review found most firms weak at outcome monitoring. Under the UK reimbursement rules, no excess may be charged to a vulnerable customer.

Design:

- **Record:** VulnerabilityRecord { driver: Health | LifeEvent | Resilience | Capability, characteristic (coded, optional), needs[] (for example "Call, not SMS", "Allow extra time", "Speak to authorised third party"), source: CustomerTold | ThirdParty | StaffObserved, consentRecorded, recordedBy, recordedAt, reviewBy }. A review date is mandatory (default 6 months).
- **Shown as needs, not labels:** the case key panel shows a chip "Support needs · 2", which opens the needs. The driver and characteristic are hidden behind an audited reveal, like masked fields (8), because they can be health data.
- **Where it changes behaviour:**

- the payment lightbox and RFI form show the needs at the top, and RFI uses the customer's preferred channel;
 - the claim sets the excess to 0 and requires a supervisor for gross negligence;
 - the Compose quality scorecard checks plain language when needs include capability;
 - the payer notice uses the preferred channel.
- **Not a risk input:** the record is excluded from case risk and fraud models, so it can never raise a customer's risk score. AskJooby may point out possible indicators in notes, but only staff create a record.
 - **Outcome monitoring:** a Team view tile compares outcomes for customers with and without support needs: hold duration, claim time to decision, claims declined, complaints.

Interaction	Does	Call	Status
Chip and needs	Active needs for the case's customer	CG-47 GET /api/Customer/{id}/Vulnerability (needs only; inside CH-00)	New
Reveal driver	Shows driver and characteristic, audited	POST /api/Customer/{id}/Vulnerability/Reveal (a CaseEvent)	New
Add or review	Records needs with source, consent and review date	Op: RecordVulnerability · Op: ReviewVulnerability	New
Outcome tile	Outcomes split by support needs	CG-48 GET /api/Team/Outcomes?split=supportNeeds	New

19. Reporting and referrals

Filing suspicious activity reports with approval, tracking them with the authority, and taking referrals from staff.

19.1 Referral form and receipt

F1 Referral form and receipt 2.3.1 · tenant logo and name only, nothing of Jube

logo Nile Commerce Bank

Report a concern to the MLRO

Confidential. The customer is never told. You'll get a receipt with the time.

What did you see?

Customer asked twice how to keep deposits under the limit.

When24 Sep 2026 11:20Account, if knownoptional

Customer name, if known

Marcus Sterling

Attach a file (optional)

Send to MLRO

logo Nile Commerce Bank

Received

ReferenceREF-0088

Disclosed at24 Sep 2026 11:24:07 (Cairo)

ToThe MLRO

This receipt records when you made your disclosure. You won't be told the outcome; that protects you and the investigation. Don't discuss this with the customer.

Download receipt (PDF)

My receipts (3)

Fig. 45-F1-referral · Referral form and receipt

Tenant branding only. The receipt gives the time of disclosure and never the outcome.

19.2 Report status

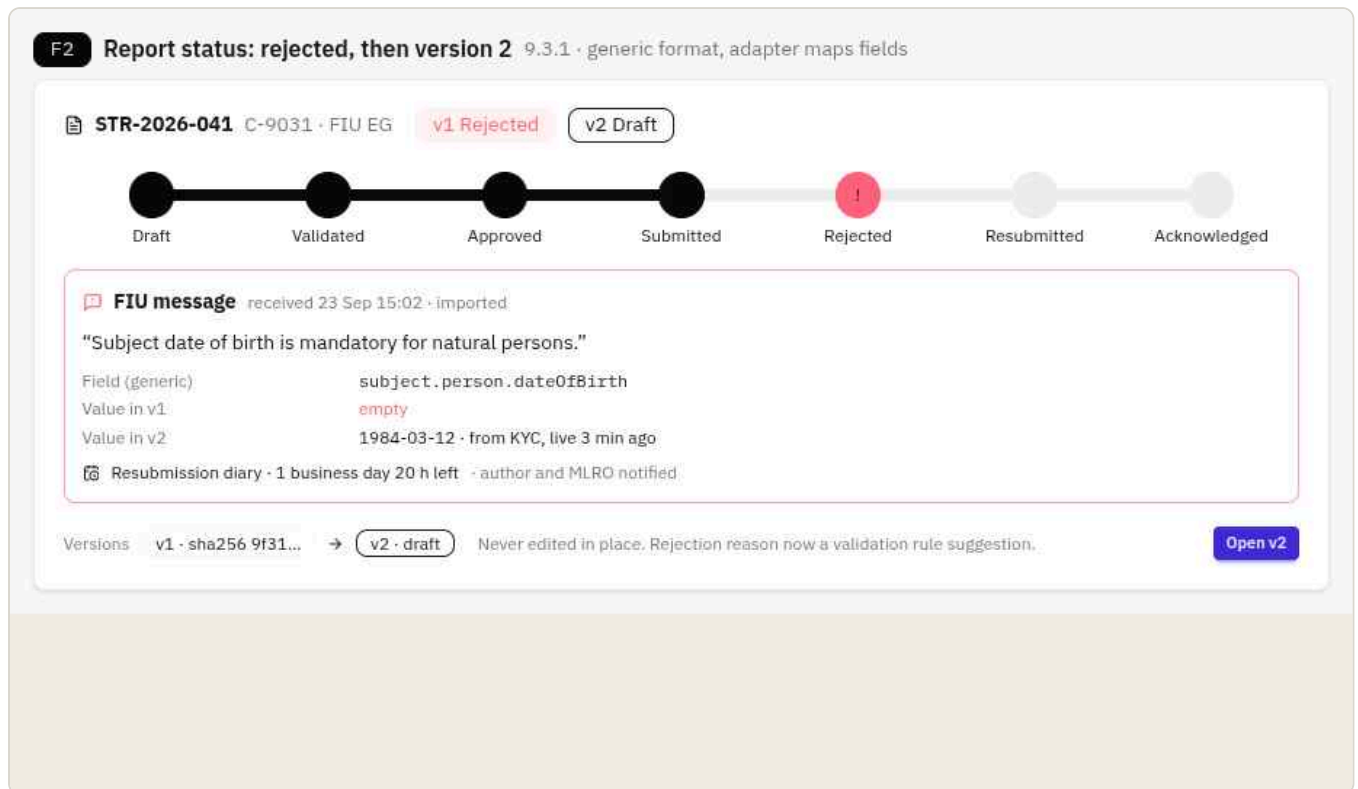


Fig. 46-F2-report-status · Report lifecycle with rejection

The lifecycle runs as steps. The FIU's message is shown against the generic field it refers to, followed by the resubmission diary and the version chain (v1 is never edited in place).

20. Assurance and automation

Tools that let a team check its own work, ask customers for information, and spend analyst time where it matters. Agent triage and web research are off by default: agent triage is enabled per filter, web research per tenant with every query logged.

20.1 Agent L1 triage with a work log

M1

Agent L1 triage with work log

top of Summary · agent recommends, analyst executes

Triage agent

Researcher · read-only tools

ran 10:15 on case creation · 41 s · 9 steps

Re-run

RECOMMENDS

Escalate: Investigate as structuring

agreement with past analysts on similar cases: 84%

11 cash deposits EGP 45,000, each below the EGP 10,000 threshold, 14–23 Sep · Journal, 11 rows

P2P out EGP 9,500 to a beneficiary first seen 20 Sep, 35 min after the last deposit · ARC-771203

Shared device DEV-8831A with confirmed TP ACC-915 Duarte (C-8812) · Graph, 1 hop

No prior cases; KYC tier Retail; declared income does not explain the cash · KYC live 10:15

✓ Accept · open Close as Escalate...

Override...

Accept pre-fills the lightbox; you still review and submit.

Work log · 9 steps, all recorded as CaseEvents

Hide

10:15:02

Case/Anchor C-9041

ok · 212 ms

10:15:04

Journal ACC-441 · 30 d · type=Cash deposit

11 rows

10:15:07

Graph/Neighbourhood DEV-8831A · 1 hop · hubs off

4 nodes

10:15:11

Case search ACC-915 · closed

C-8812 TP

10:15:40

Policy check · AML structuring SOP v4 §2

escalate

4 more steps · model deepseek-v4.1-flash (tenant setting) · prompt and tool versions pinned in the run record

Fig. 50-M1-agent-triage · Agent triage card with work log

An agent pre-investigates each new case using read-only tools and recommends a disposition, citing the evidence it used. **Accept** opens the normal Close lightbox pre-filled, and the analyst still reviews and submits. **Override** records the disagreement with a reason. Every step is a CaseEvent, and the model and prompt versions are pinned in the run record. Where the agent and the analyst disagree, the case is more likely to be sampled for QA.

Interaction	Call	Status
Card loads	CG-01 GET /api/Case/{id}/AgentRun	New
Re-run	CG-02 POST /api/Case/{id}/AgentRun	New
Accept	Opens Close Preview (existing lightbox)	Reuse
Override	CG-03 Op: OverrideAgent	New

20.2 QA sampling and review

M2 QA sampling and review Team view card + review lightbox

QA sampling

Plan

5% of closed cases, weekly, Monday 07:00

Weighting

×3 where analyst overrode the agent · ×2 new starters

Queue

14 to review · 3 overdue

Last 30 d

Pass 88% · Minor 9% · Major 3%

Open queue

Edit plan

QA review · C-8990

closed FP by R. Lund, 19 Sep · sampled (override ×3)

Check	Pass	Fail	N/A
All activations reviewed	☒	☐	☐
Customer contact attempted where SOP requires	☐	☒	☐
Rationale supports outcome	☒	☐	☐
Agent recommendation addressed (overridden: reason given)	☒	☐	☐

SOP 3.1 requires a call-back for P2P to a new beneficiary over EGP 5,000; none recorded.

Outcome

Pass

Minor

Major

☒ Reopen case (needs approval)

Cancel

Record review

Fig. 51-M2-qa-sampling · QA sampling card and review lightbox

The sampling plan (rate, schedule and weightings) sits on the Team view. Reviewers work a queue with a pass, fail or N/A checklist. A **Major** outcome can reopen the case, which needs approval.

Interaction	Call	Status
Plan	CG-04 GET/PUT /api/QaPlan	New
Queue	CG-05 GET /api/QaQueue	New
Record review / Reopen	CG-06 Op: RecordQaReview , CG-07 Op: Reopen	New

20.3 Request for information to the customer

M3

RFI to the customer

lightbox · tenant portal · thread in Notes

Send RFI · C-9044

Template

Source of funds · payment to new beneficiary

1. What is the payment of EGP 12,300 to Alpha LLC for?

2. Upload an invoice or contract

+ Add question

Due

26 Sep 17:00

Send to

o...@mail.example (KYC)

Tipping-off check passed: no SAR filed or pending on this case key.

If a SAR is pending, sending is blocked unless the MLRO approves.

Cancel

Send RFI

logo

Nile Commerce Bank

We need a little more information

What is the payment of EGP 12,300 to Alpha LLC for?

Machinery deposit, invoice attached.

INV-2231.pdf · scanned ✓

Send answers

Link works once and expires 26 Sep 17:00.

RFI-0142

Answered

diary stopped

Sent 09:02 · viewed 09:40 · answered 10:05 · 1 upload added to the case

Fig. 52-M3-rfi · RFI lightbox, customer portal and thread

The analyst sends questions and document requests from the case. The **tipping-off check** blocks sending when a SAR is pending, unless the MLRO approves. The customer answers through a single-use, tenant-branded link, and the answers come back as case uploads and a note. An RFI diary runs until the customer answers.

Interaction	Call	Status
Send / cancel	CG-08 Op: <code>SendRfi</code> , CG-11 Op: <code>CancelRfi</code>	New
Portal	CG-09 GET <code>/api/Rfi/{token}</code> , CG-10 POST <code>/api/Rfi/{token}/Answer</code> (public, rate-limited)	New

20.4 Web research with citations

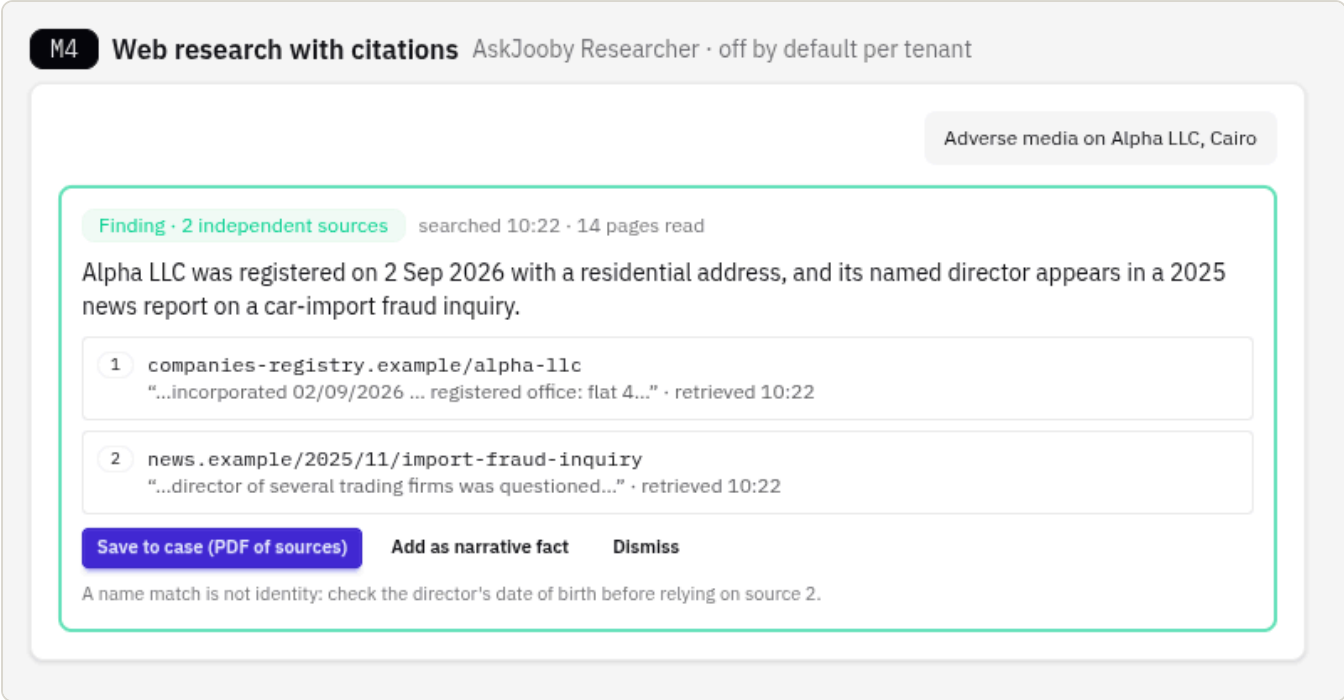


Fig. 53-M4-web-research · Web research finding with citations

This is AskJooby's Researcher persona. Every claim cites its sources, showing the URL, retrieval time and the quoted passage. A **finding** needs at least two independent sources. **Save to case** stores a PDF of the sources. It is off by default for each tenant, because it sends data outside Jube.

Interaction	Call	Status
Ask	CG-12 POST /api/AskJooby/Research	New
Save to case	CG-13 Op: SaveResearch	New

20.5 Automation recipes

M5 Automation recipes
one mechanism for macros, hooks and schedules · maker-checker publish

Periodic review · high-risk customers
draft v2

Test on last 30 days
Publish...

When
Every day 06:00 (Cairo)

If
Customer risk tier = High and last review older than 365 days
query builder · compiled server-side

Then
Registered operations only

- Op: CreateCase → workflow "Periodic review"
- Op: Assign → pull queue "KYC team"
- Op: SetDiary → 10 business days

Dry run: would have created 37 cases in 30 days (peak 6 on 1 Sep); 0 failures.

Run	Result (v1)	Events
27 Sep 06:00	2 cases created	view
26 Sep 06:00	1 failed: queue full, retried 06:05 ✓	view

Fig. 54-M5-automation-recipes · Recipe builder with dry run and run log

A recipe is **When** (a schedule or event), then **If** (a condition from the query builder, compiled on the server), then **Then** (registered operations only). **Test** replays the last 30 days to show what the recipe would have done. **Publish** needs maker-checker approval. Each run is logged with its result and links to its CaseEvents. Recipes replace separate macros, hooks and scheduled tasks with one audited mechanism.

Interaction	Call	Status
Recipes	CG-17 <code>/api/AutomationRecipe</code> CRUD	New
Test	CG-18 <code>POST /api/AutomationRecipe/{id}/DryRun</code>	New
Run log	CG-19 <code>GET /api/AutomationRecipe/{id}/Runs</code>	New
Publish	Op: <code>PublishRecipe</code>	New

20.6 Tune a rule from outcomes

M6

Tune a rule from outcomes: backtest and shadow from Activations “Tune this rule...”

≡ Structuring 9d v3 · 90 days · 412 hits · 212 closed

Proposed change

count(cash deposit, 9d) ≥ 10 (was 8) and each < 10,000

Suggested by outcomes: 71% of FP closures had 8–9 deposits.

Backtest · same 90 days

	v3	v4
Hits	412	251
TPs caught	66	63
TPs missed	—	3
Analyst hours	206	126

Open the 3 missed TPs

Shadow runs v4 beside v3 without creating cases, then promotion needs approval.

Start 14-day shadow

Fig. 55-M6-rule-tuning · Rule backtest and shadow mode

This opens from the rule path in Activations. It shows the proposed threshold, a backtest over the same 90 days (hits, true positives caught and missed, analyst hours), and a link to the missed true positives. **Shadow mode** runs the new version alongside the live one without creating cases. Promoting it needs approval.

Interaction	Call	Status
Performance	CG-20 GET /api/ActivationRule/{id}/Performance	New
Backtest	CG-21 POST /api/ActivationRule/{id}/Backtest (reuses the llm-tool-offload backtest service)	New
Shadow / promote	CG-22 Op: StartShadow / PromoteShadow	New

Deliberately not built:

- a cross-institution fraud consortium, which conflicts with self-hosting;
- agents closing cases on their own. Agents recommend and people execute.

21. Suppressions and lists

Why: Lists and Dictionaries are now used far more to build rules than to suppress alerts. Today anyone with the menu item can change them, and the change takes effect within moments, with no version or approval. Rule outcomes then depend on something outside the model's version, so a snapshot cannot replay a past decision, and the audit trail doesn't show why a rule matched.

The strategy:

- **Lists and Dictionaries become model artefacts:** versioned, approved, and captured in the model snapshot.
- **Suppression becomes the only override surface:** time-bound, with a required reason, recorded on every transaction it affects, and usable both from a case and on its own.

21.1 What Suppression does today

Suppression is keyed by a Request XPath field with Enable Suppression switched on (for example IP or AccountId), and applies either to the whole model or to one activation rule.

- **Still happens while suppressed:** the rule still matches, and TTL counter increments are not suppressed.
- **Stopped:** response elevations (declines), notifications, case creation and the activation watcher.
- **How it's set:** with a switch after Fetch. There is no reason, no expiry, and no record of which matches it stopped.

A separate mechanism shares the word. When an HTTP Adaptation returns an `Error`, its `Value` is null ("suppressed" in the protocol, §4), and rules that read it do not match. **This is model health, not an override.** The UI calls it "**unavailable**" so the two are never confused.

21.2 Suppress from an activation

S1 Suppress from an activation lightbox · time-bound · reason required

Suppress · Foreign velocity 24h · C-9052 reversible · audited

Suppress for: AccountId · ACC-518 IP · 41.33.8.12 DeviceId · DEV-2207

Scope: This rule only All rules on model "Retail cards" · needs approval

For: 7 d 14 d 30 d Until... until 12 Oct 09:00 · max 90 d (tenant policy)

Customer contact: confirmed travel

Reason: Called 27 Sep 10:40, customer in Lisbon until 10 Oct; card use confirmed.

Evidence: Note N-3312 · Called customer → Reached · A. Vance

What will happen

- ✓ ACC-518 transactions are still scored, archived, and matched by this rule. Each match is recorded as **suppressed by SUP-0142**.
- ⓘ While active, this rule's matches do not cause: **response elevation (decline), notifications, case creation, activation watcher**
- ⓘ TTL counters still increment, so velocity is still counted and the other rules still see it
- ⓘ Last 30 days: 0 matches would have been suppressed; none on a case later confirmed TP
- ⓘ Expires 12 Oct 09:00. You get an Inbox reminder 3 days before, and renewing needs a new reason

⚠ **Not available for:** SAN-01 sanctions screening, which is a floor rule and can never be suppressed. Keys with a SAR pending or a confirmed TP in the last 12 months need MLRO approval.

Cancel Suppress for 14 days

Fig. 56-S1-suppress-lightbox · Suppress lightbox

On any activation card: **Suppress...** opens a lightbox with these fields:

- **Key:** only the suppression-enabled fields present on this transaction.

- **Scope:** this rule, or the whole model. Whole model needs approval.
- **Duration:** required. 7, 14 or 30 days, or a date. At most 90 days by tenant policy, and never indefinite.
- **Reason:** a category plus text.
- **Evidence:** a note from the case.

"What will happen" is the server Preview:

- what still runs (scoring, archive, matching, TTL counters);
- which four actions stop;
- how many matches in the last 30 days would have been suppressed, and whether any were on cases later confirmed TP;
- when it expires, and the reminder.

Guardrails:

- **Never allowed:** floor rules (sanctions).
- **MLRO approval needed:** keys with a pending SAR, or a confirmed TP in the last 12 months.
- **Maker-checker:** model scope, or more than 30 days.

Other entry points:

- **Close lightbox:** when the outcome is FP, it offers "Also suppress {rule} for {key}", pre-filled.
- **Agent:** can recommend a suppression, but never create one.

Interaction	Does	Call	Status
Suppress...	Preview with consequences and the 30-day impact	CG-27 Op: <code>CreateSuppression</code> Preview (impact from CG-30)	New
Submit	Create; approval if the policy requires it	CG-27 Execute	New (writes today's suppression rows + the new fields)
Key options	Suppression-enabled Request XPath fields on this transaction	Existing Request XPath <code>EnableSuppression</code>	Exists

21.3 Suppressed and unavailable, as seen in the case

The screenshot displays the 'S2 Suppressed and unavailable, as seen in the case' panel. It includes a 'Case key' section with 'ACC-518', '1 active suppression', and 'SUP-0142 · Foreign velocity 24h · until 12 Oct'. Below this, an activation entry for 'ACT-9120 Foreign velocity 24h' is shown as 'matched · suppressed' on '27 Sep 18:02'. The suppression details state it was applied by 'SUP-0142 (this rule, AccountId ACC-518) · A. Vance · reason "confirmed travel" · until 12 Oct. No decline, no notification, no case.' and includes 'Open SUP-0142' and 'Revoke...' buttons. A yellow warning box indicates 'StructNet v7 unavailable' with the message: 'the adaptation returned an error, so its Value is null. "Timeout after 800 ms". 2 rules that use it did not match on this transaction: High score, Score × velocity. This is not a suppression: nobody switched anything off. It is shown under model health.' At the bottom, a journal entry shows '27 Sep 18:02', 'Card, foreign', 'EUR 212.40', and 'Lisbon · matched Foreign velocity 24h, suppressed'.

Fig. 57-S2-suppressed-in-case · Suppressed activation and unavailable adaptation

- **Case key panel:** a "1 active suppression" chip.
- **Activation matched while suppressed:** the card is greyed and labelled "matched · suppressed by SUP-0142", with who, why, until when, and a Revoke button.
- **Journal:** rows affected by a suppression carry the same icon.
- **Unavailable adaptation:** an adaptation that returned an error shows its message and **which rules did not match because of it**.

Interaction	Call	Status
Suppressions on this case's keys	CG-32 GET <code>/api/Case/{id}/Suppressions</code>	New
"matched · suppressed by" on each activation	CG-33 engine stamps <code>SuppressedBy[{id, version}]</code> into the archive	New (engine)
Revoke	CG-28 Op: <code>RevokeSuppression</code> (reason required)	New
Adaptation unavailable	Existing <code>HttpAdaptation.{name}.Error</code> in <code>Archive.Json</code>	Exists

21.4 Suppressions page, with or without a case

Fig. 58-S3-suppressions-page · Suppressions page

This is the top-level page, replacing the model and rule switch tree. It covers:

- **Search:** by key and value (today's Fetch).
- **Filters:** active, expiring within 7 days, without a case, model scope, pending approval, and legacy with no reason.
- **Detail:** scope, what it does not stop, owner, a history timeline, and Renew, Revoke and Open matches.
- **New suppression:** create one without a case, for example when a customer phones in. The same reason, expiry and guardrails apply.
- **Bulk:** bulk revoke is allowed. Bulk create is not: every suppression gets its own reason.

Migration: each existing suppression becomes a row with the reason "Legacy, no reason" and an expiry of migration date + 30 days, and its owner is told. Nothing is left open-ended.

Interaction	Call	Status
List and search	CG-26 GET <code>/api/Suppression?key=&value=&status=&scope=</code>	Extend (today's Fetch)
History	CG-31 GET <code>/api/Suppression/{id}/History</code>	New
Renew	CG-29 Op: <code>RenewSuppression</code> (new reason)	New
Expiry reminder	Inbox item 3 days before expiry; <code>ServiceChange</code> area <code>Suppression</code>	New

21.5 A list is a model artefact

S4 A list is a model artefact: versioned change set, approved, in the snapshot model configuration > Lists

Retail cards > Lists > **Blocked beneficiaries** v14 live v15 draft used by 3 rules - in snapshot 2026-09-27 (hash 3f9a...)

Upload CSV Backtest v15 Submit for approval

Lists are part of the model: changes are versioned, approved, and recorded in the model snapshot, so any past decision can be replayed exactly. To stop actions for one customer, use a suppression.

Value	Source	Proposed by
+ ACC-92	Proposal from C-9044 (Refuse payment)	A. Vance
+ ACC-77	CSV upload, row 1	T. Farouk
- ACC-311	Account closed 2025	T. Farouk

412 unchanged values hidden · show all

Backtest v15 against v14 - last 30 days

	v14	v15
Beneficiary hold (RE)	19	27
Mule pass-through	4	6

Urgent?
An emergency change goes live now and needs approval within 24 h. It shows in Pending changes on the Team view.

Emergency publish...

Fig. 59-S4-list-change-set · List change set

A list or dictionary sits under its model's configuration.

- **Change sets:** edits and CSV uploads create a **draft version** of the whole list, shown as a diff (additions, removals and their source).
- **Test and approve:** a backtest compares the new version with the live one, then it is submitted for approval.
- **Snapshots:** the model snapshot records the list version and hash, so every activation can be replayed exactly.
- **Urgent changes: emergency publish** goes live now and must be approved within 24 hours. It shows in Pending changes on the Team view.

From a case, lists can't be written.

- "Block identifier" and "Also block beneficiary" (on Refuse payment) become **Propose list change:** a line in the model's draft change set, with the case as its source.
- To stop actions for one customer, use a suppression.

Interaction	Call	Status
Change set: draft, diff, CSV	CG-34 /api/EntityAnalysisModelList/{id}/ChangeSet (the same for Dictionaries)	New (replaces direct value writes)
Propose from a case	CG-35 Op: ProposeListChange (replaces Op: BlockIdentifier)	New
Backtest a version	CG-21 backtest service with listVersion	Extend
Version in the snapshot	CG-36 model snapshot includes list and dictionary version + hash	New (engine)

21.6 Rules

1. **Expiry is mandatory:** default 14 days, maximum 90 days per tenant, and no indefinite suppressions. Anything longer-lived is a rule-tuning or list problem.
2. **Maker-checker** for model scope or more than 30 days. MLRO approval for keys with a pending SAR or a confirmed TP in the last 12 months. Floor rules can never be suppressed.
3. **No step-up:** a suppression is reversible and time-bound, and approval covers the risky cases.
4. **Tuning signal:** a rule with more than 20 active suppressions is flagged in rule tuning and on the Team view, because suppressing one key at a time hides a badly tuned rule.
5. **Lists live in model configuration**, not the main menu. Customer-service roles keep Suppressions and lose direct list editing.

22. Configuration

Configuration screens are generated from the DTOs (section 1.2). This section covers the hub navigation and the tables that hold legal limits.

22.1 Configuration hub cards

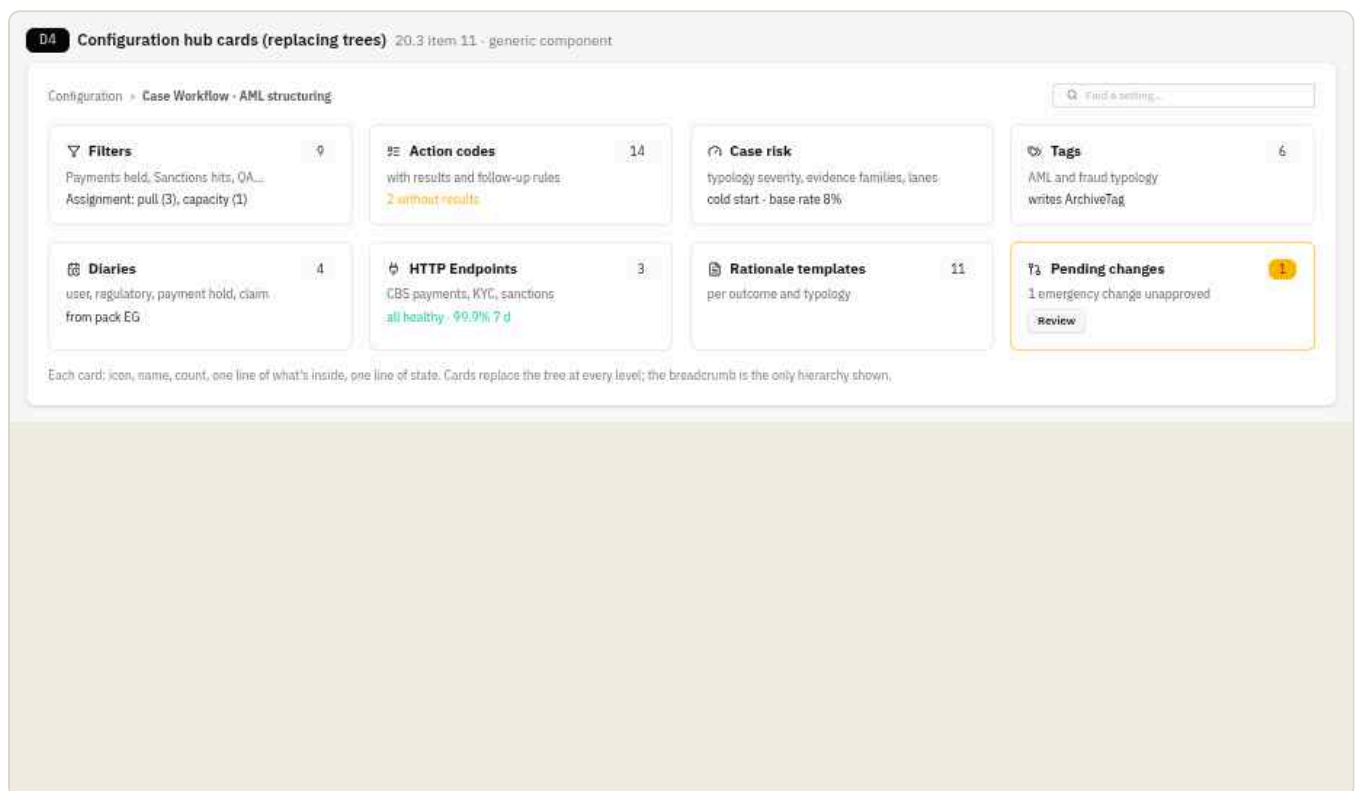


Fig. 42-D4-config-hub · Hub cards

Cards replace trees at every level. Each card has an icon, name, count, one line on what's inside and one line of state. The breadcrumb is the only hierarchy shown.

22.2 Rule tables per market and scheme

Legal limits are data, never code. Each table is edited through the generic configuration form, versioned, published with maker-checker approval, and dated so a change takes effect without a release; work already running keeps the row it started under.

- **Payment hold policy** (section 16): hold ceilings, escalation and payer notices per market and direction.
- **Recall scheme rules** (section 17): recall reasons, windows and response times per payment scheme.
- **Reimbursement schemes** (section 18): claim clocks, cap, excess, receiving-PSP share and exceptions per scheme.
- **Release limits** on each user (section 16).

PART IV

Reference

Endpoints, the build handoff and the regulatory basis.

23. Endpoints

Endpoint	Used by	Status
GET /api/Case/{id}/Anchor	First paint (CH-00)	New
GET /api/Case/{id}/Risk	Risk chip hover, popover (CP-17, CH-03)	New
GET /api/Case/{id}/Risk/History	Section 6 (S6-05)	New
GET /api/CaseSearch + lane, likelihood, band, impact, Priority, sort=lane,priority	Cases list (CP-02)	Extend
GET /api/Case/{id}/Summary + lane and risk chip	Peek (CP-06)	New
GET /api/CaseWorkflowFilter/{id}/RiskMatrix	Risk matrix header	Proposed (add to 22 as CP-18)
Op: AssessRisk; Op: ChangePriority (override with reason and expiry)	Popover, bulk bar	New
CaseHub.CaseRiskChanged	Open pages and list rows	New
GET /api/Case/{id}/PaymentHolds	Held payment card	New
Op: ReleasePayment / RefusePayment / ExtendHold / RequestRelease	Payment lightbox	New
CaseHub.PaymentHoldChanged	Hold countdown, lane	New
POST /api/Authentication/StepUp/Begin , /Complete ; step-up enrolment	Step-up panel, user settings	New
GET /api/Journal + tags[] ; GET /api/Archive/{id}/Card + tags	Journal Tags column, transaction card	Extend
Op: TagTransaction / UntagTransaction (over today's ArchiveTag write)	" + Tag" menu	Extend
Configuration: User.PaymentReleaseLimit ; pack MaxHold , HoldClock , OnMaxHold ; workflow status "Hold expiring"	Payment rules	New

Background, not called by the UI: the case risk worker (4.5.8), ArchiveScore , and the case risk model registry and backtest (4.5.9).

23.1 Endpoints for holds, recall, claims, support needs, bulk tagging, the read audit and AskJooby

#	Endpoint	Purpose	Status
CG-40	<code>/api/RecallSchemeRule</code> + <code>/Resolve</code>	Recall reasons, windows and response times per scheme	New
CG-41	<code>GET /api/Case/{id}/Recalls</code>	Recovery cards (outbound) and recall requests (inbound)	New
CG-42	<code>POST /api/Recall/{id}/Response</code> and inbound recall intake	Answers to our recalls; recalls sent to us	New
CG-43	<code>GET /api/Account/{id}/PayeeCheckStats</code>	Payee checks answered against an account	New
CG-44	<code>GET /api/Claim/{caseId}</code>	Claim panel	New
CG-45	<code>/api/ReimbursementScheme</code> + <code>/Resolve</code>	Reimbursement rules per scheme	New
CG-46	<code>GET /api/Claim/Register</code>	Claim register export	New
CG-47	<code>/api/Customer/{id}/Vulnerability</code> (+ <code>/Reveal</code>)	Support needs and audited reveal	New
CG-48	<code>GET /api/Team/Outcomes</code>	Outcome monitoring split by support needs	New
CG-49	<code>PUT /api/Invoke/Archive/Tag/Bulk</code>	Bulk tagging, by ids or by filter	New
CG-50	<code>POST /api/Case/{id}/ViewReason</code>	Reason for viewing a Sensitive account	New
CG-51	<code>GET /api/Team/ViewAnomalies</code>	Unusual viewing for supervisors	New
CG-52	<code>POST /api/AskJooby/Bite</code>	One framed Bite for a subject, cached by facts hash	New
CG-53	<code>POST /api/AskJooby/Proposal</code>	Agent proposal as a draft change set on a draft snapshot, with backtest	New

New operations: CreditInbound, ReturnInbound, NotifyCounterpartyPsp, RequestRecall, ChaseRecall, AnswerRecall, OpenClaim, StopClock, ResumeClock, NotifyReceivingPsp, DecideClaim, RequestContribution, RecordContribution, RecordVulnerability, ReviewVulnerability, TagTransactions. All go through the generic Preview/Execute pipeline (stage 2).

Build stage: bulk tagging and the read audit are built in stage 3; inbound holds, recall and payee checks in stage 4; claims and support needs in stage 7, after requests for information, because Stop the clock uses that flow.

Endpoints CG-01 to CG-58 (QA, RFI, agent triage, web research, automation, rule tuning, suppressions, lists, narratives, hold policy) are listed with their contracts in the Vue blueprint, sections 8–9.

24. Build handoff

Build from these, in this order:

1. **This document:** what each screen does, and every interaction with its endpoint.
2. **** skill-vue-blueprint/SKILL.md **** the Vue 3 blueprint, covering the component tree with every prop and event, composables and stores, states, validation, breakpoints and accessibility, the migration phases, library decisions, MCP setup and the security rules.
3. **** ui-specification-golden-audit.md **** the code audit, with the full endpoint list (Appendix A) and backend build order (Appendix B).
4. **** jube_case_management_v2_spec_0.11.md **** the product and technical specification.

Facts from the code audit that the build relies on:

- charts go through `Jube.Charting ( Chart.Column() , Chart.Sparkline() , Chart.Waterfall() )`;
- the AskJooby model is a deployment setting (default `deepseek-v4.1-flash`), so the design describes capability, not a model;
- only the Researcher persona exists today; the Analyst Agent is built first, then the Rule Writer;
- CodeQL and Playwright are new CI work;
- editing a session filter exists; saving one is new (CP-19).

Stack: Vue 3 components compiled in CI and checked in as built files, daisyUI 5, Tabulator, Lucide, SignalR and `Jube.Charting`. jQuery QueryBuilder stays, isolated to the rule builder. Jube's own code editor replaces ACE, and all of Kendo is removed.

Live updates:

- **Transport:** the existing `ServiceChangeHub` already publishes an event for every service-layer write (`OperationScope`, then `IServiceChangeBus`, then `ServiceChangeRelay`, with the tenant group joined automatically). The client listens with one connection for the whole app.
- **What an event does:** it only says an entity is stale, so it marks the matching TanStack Query entries stale (`[Area, entityId]` and the area's lists), and they refetch in the background.
- **Missed events:** a full refresh runs on reconnect and when a long-hidden tab returns.
- **Polling:** only money-critical views poll, every 30 s, as a safety net.
- **Editing:** an update never overwrites what someone is editing; they see "Changed by X · Reload" instead.
- **Presence:** `CaseHub` is new and carries presence only.
- **Screens and events:** where this document says a screen updates "live" or names a CaseHub push (`CaseRiskChanged`, `PaymentHoldChanged`), it now happens through this mechanism.

Security (non-negotiable):

- the JWT is held in a tab-scoped secure store and sent as `Authorization: Bearer`; no auth cookies;
- same origin in development through the Vite proxy;
- no `v-html`, no `unsafe-eval`;
- step-up tokens are single use and bound to the preview for payment decisions.

Appendix A. Regulatory basis

The payment and claim screens follow these sources. Values that differ by market are held in the rule tables (section 22), and compliance confirms each market's row.

- PSR, PS25/5 consolidated policy statement on APP scams reimbursement (May 2025): psr.org.uk
- FCA, FG24/6 finalised guidance on payment delays and suspicious inbound payments: fca.org.uk/publication/finalised-guidance/fg24-6.pdf
- EPC, Verification Of Payee scheme rulebook and matching recommendations: europeanpaymentscouncil.eu
- EPC, clarification paper on SCT and SCT Inst rulebooks (recall windows and answers)
- Pay.UK Confirmation of Payee reason codes, as published by participating providers
- DLA Piper and Norton Rose Fulbright on the PSD3/PSR provisional agreement (November 2025)
- FCA, FG21/1 and the March 2025 review of firms' treatment of customers in vulnerable circumstances
- FCA, finalised guidance on payment delays (outbound delay up to 4 business days, payer told by the end of the next business day); NIST SP 800-63B-4 on phishing-resistant authentication