
CLOUD SECURITY ASSESSMENT

Savanna Ridge Financial Ltd

Configuration risks, sensitive data exposure and suspicious activity

6 November 2026

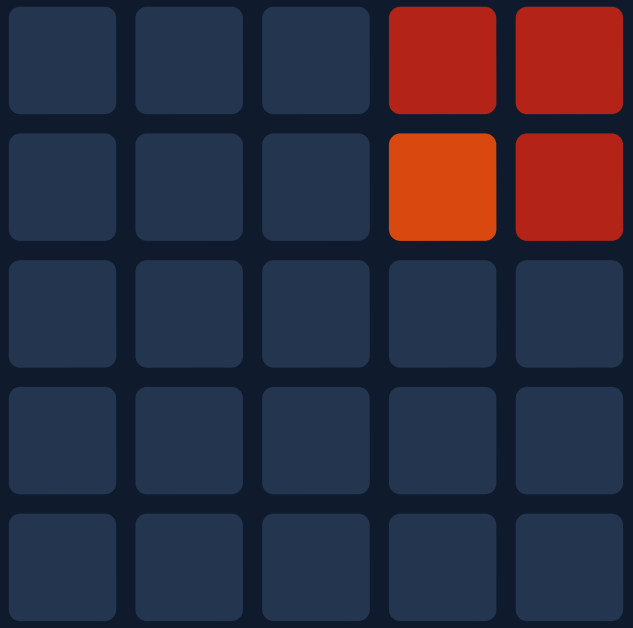

Based on configuration findings, data inventory and authentication logs

OVERVIEW

Executive summary

The most urgent risk is a customer database holding 1,284,000 records that is open to the internet, where a single session from Brazil read 48,500 records on 4 November. A storage bucket with customer data and a server with remote desktop open are also reachable from the internet.

41

findings across 23 assets

19

critical or high severity

4 of 9

sensitive data stores exposed

9

suspicious access events

What to do first


1. Remove internet access to the customer database and review the Brazil session
2. Block public read access on the S3 bucket holding customer data
3. Close remote desktop to the internet and enforce MFA for administrators

SECURITY POSTURE

19 of 41 findings are critical or high severity


Findings by severity

46% need action within 60 days

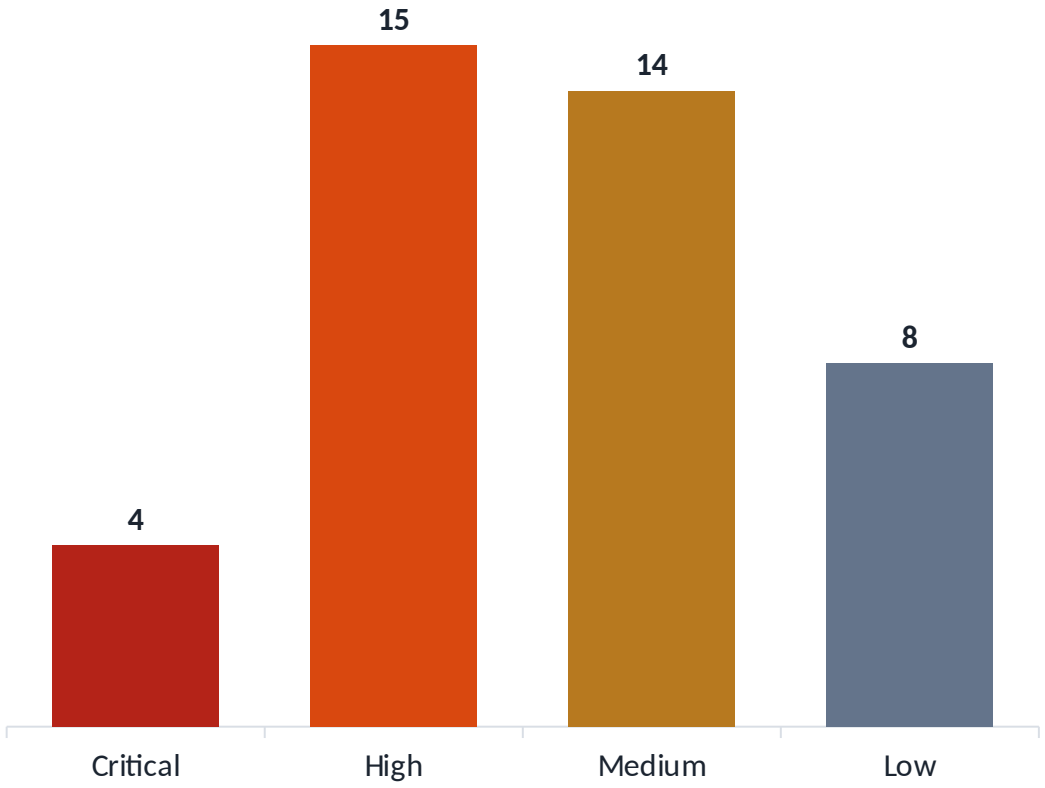


Findings by cloud service

Where the configuration problems are concentrated

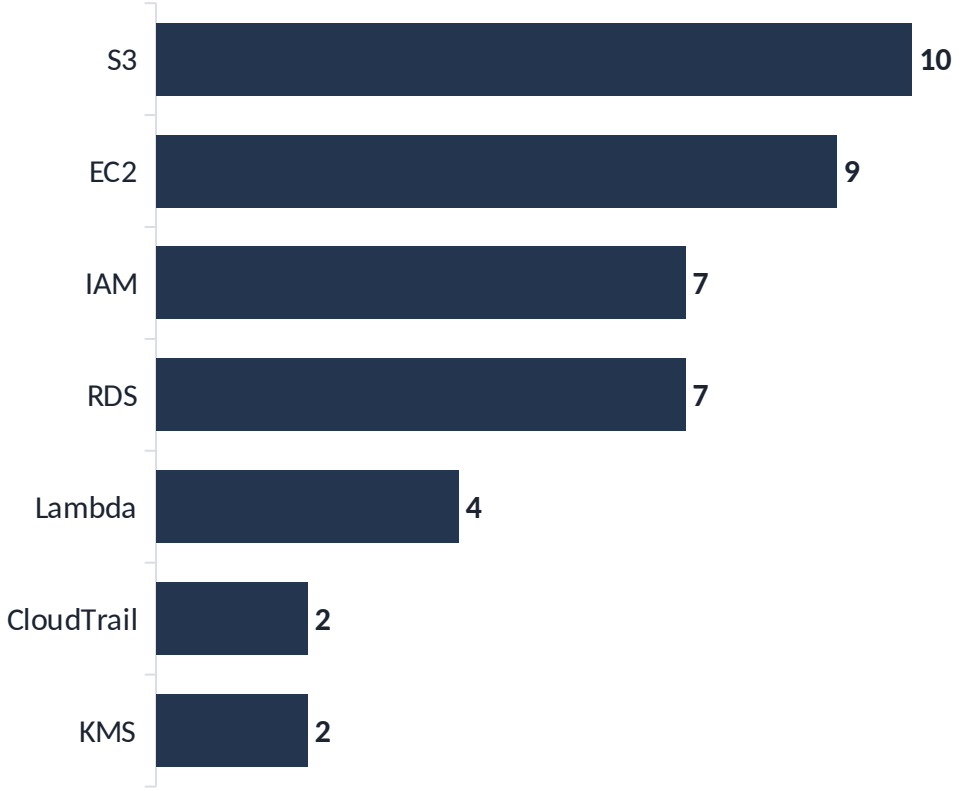

RISK HEATMAP

6 findings sit in the critical zone

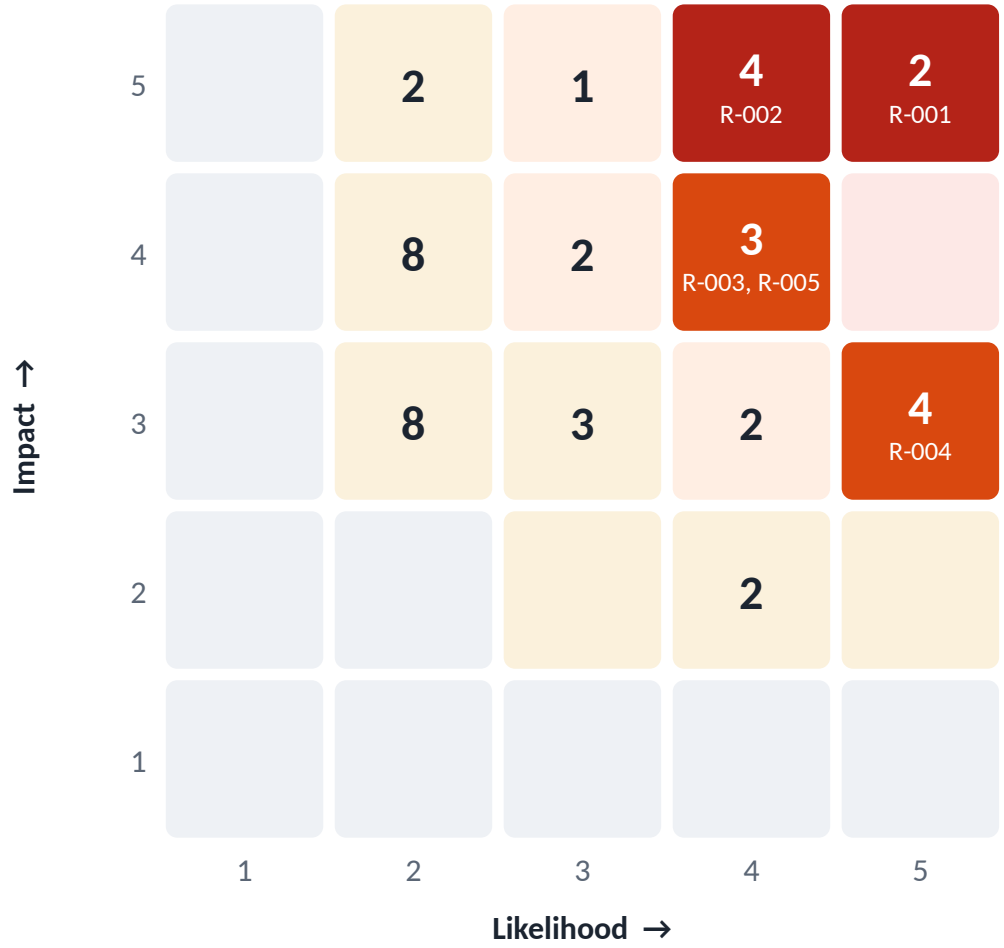

- **Critical zone** · Act now
- **High zone** · Plan this month
- **Medium zone** · Schedule
- **Low zone** · Monitor

Numbers show how many findings sit in each cell. Solid cells contain a top risk.

Top risks on the map

R-001	RDS instance publicly accessible
R-002	S3 bucket allows public read access
R-003	RDP open to the internet
R-004	Administrator IAM user without MFA
R-005	Lambda function URL with AuthType NONE

SENSITIVE DATA EXPOSURE

4 of 9 sensitive data stores are exposed

Records at risk

1,696,000


personal or financial records held in publicly exposed stores among the top risks

Exposure combined with sensitive data doubles a risk's score; suspicious access raises it further.

Risk	Asset	Data	Records	Exposure	Suspicious access
R-001	a-rds-001	PII	1,284,000	Public	Yes
R-002	a-s3-001	PII	412,000	Public	No
R-003	a-ec2-004	PII	n/a	Public	No
R-005	a-lambda-001	financial	n/a	Public	No

Records held per data store

red = publicly exposed

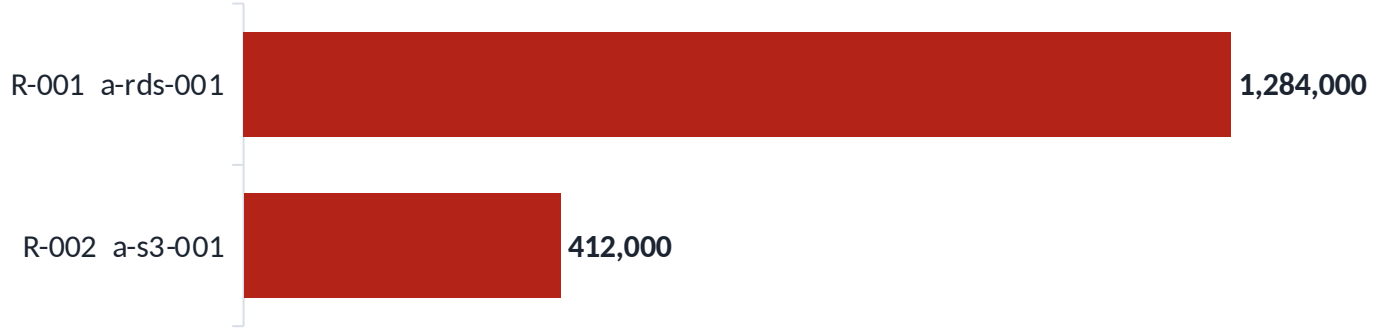

SUSPICIOUS ACTIVITY

9 suspicious access events were detected

Unusual data access

User	**alice.wanjiru**
Asset	**a-rds-001**
Country	**BR**
When	**4 Nov 2026, 23:52 UTC**

Read 48,500 records, 190x the 90-day average of 256

Rule: Records read more than 5x the user's 90-day average for the asset

Linked to R-001

Login from new country

User	**alice.wanjiru**
Asset	**a-rds-001**
Country	**BR**
When	**4 Nov 2026, 23:40 UTC**

First login from this country in 90 days (Sao Paulo, Brazil; previously seen: KE)

Rule: First login from this country for the user in the last 90 days

Linked to R-001

Excessive failed logins

User	**ops-admin**
Asset	**a-iam-001**
Country	**NL**
When	**3 Nov 2026, 02:17 UTC**

8 failed logins from 203.0.113.45 in 8 minutes; no successful login followed

Rule: 5 or more failed logins from one IP against one asset within 15 minutes

Linked to R-004

Showing 3 of 9 events: those linked to the highest-ranked risks first

RDS instance publicly accessible

CRITICAL

Risk score

60

Severity **critical**	**10**
Exposure **public**	**× 2**
Data **PII**	**× 2**
Activity **suspicious**	**× 1.5**
Score	**= 60**

Asset: a-rds-001

Evidence

CONFIGURATION FINDING FND-0027

RDS instance publicly accessible

CONFIGURATION FINDING FND-0028

Related high finding: Database security group allows 5432 from 0.0.0.0/0

CONFIGURATION FINDING FND-0029

Related low finding: IAM database authentication disabled

DATA INVENTORY a-rds-001

1,284,000 records (Restricted - regulated; PII, financial)

Business impact

Customer personal and financial records could be copied by anyone who finds the database, exposing the company to regulatory penalties and loss of customer trust.

Recommended fix

Turn off public accessibility, restrict the security group to the application subnet, enable IAM database authentication and investigate the Brazil session.

Complete within 0–30 days

S3 bucket allows public read access

CRITICAL

Risk score

40

Severity **critical**	**10**
Exposure **public**	**× 2**
Data **PII**	**× 2**
Activity **normal**	**× 1**
Score	**= 40**

Asset: a-s3-001

Evidence

CONFIGURATION FINDING FND-0001

S3 bucket allows public read access

CONFIGURATION FINDING FND-0004

Related high finding: Anomalous anonymous S3 object listing

CONFIGURATION FINDING FND-0002

Related high finding: S3 bucket default encryption disabled

CONFIGURATION FINDING FND-0003

Related medium finding: S3 server access logging disabled

Business impact

Anyone on the internet can read the files in this bucket, including customer personal data.

Recommended fix

Enable Block Public Access on the bucket, then turn on default encryption and server access logging.

Complete within 0–30 days

RDP open to the internet

CRITICAL

Risk score

40

Severity **critical**	**10**
Exposure **public**	**× 2**
Data **PII**	**× 2**
Activity **normal**	**× 1**
Score	**= 40**

Asset: a-ec2-004

Evidence

CONFIGURATION FINDING FND-0024

RDP open to the internet

CONFIGURATION FINDING FND-0025

Related high finding: Unsupported operating system

CONFIGURATION FINDING FND-0026

Related medium finding: EBS volume not encrypted

DATA INVENTORY a-ec2-004

Record count unknown - Unknown: server was not in the asset register (Confidential; PII, financial)

Business impact

An internet-facing server with remote desktop open and an unsupported operating system is a common entry point for ransomware.

Recommended fix

Close remote desktop to the internet and use a VPN or bastion host; upgrade the operating system and encrypt its disk.

Complete within 0–30 days

CORRELATED RISK

Three signals, one asset: why R-001 ranks first

1

Misconfiguration

CONFIGURATION FINDING FND-0027

RDS instance publicly accessible

2

Sensitive data

DATA INVENTORY a-rds-001

1,284,000 records (Restricted - regulated; PII, financial)

3

Suspicious access

AUTHENTICATION LOGS A-4638DDA6

Read 48,500 records, 190x the 90-day average of 256 on 2026-11-04

Combined risk score

60

Rank 1 of 5 top risks · a-rds-001

Each signal alone could look routine. Together they show a regulated customer database open to the internet, the user's first sign-in from Brazil in 90 days, and one session reading far more records than normal. That combination is why this risk ranks first.

NEXT 90 DAYS

Remediation roadmap

0–30 days

Immediate

R-001 · CRITICAL

RDS instance publicly accessible

Turn off public accessibility, restrict the security group to the application subnet, enable IAM database authentication and investigate the Brazil session.

R-002 · CRITICAL

S3 bucket allows public read access

Enable Block Public Access on the bucket, then turn on default encryption and server access logging.

+2 more in this window

31–60 days

Next

R-005 · HIGH

Lambda function URL with AuthType NONE

Resolve finding FND-0036: lambda function URL with AuthType NONE. Then address FND-0037, FND-0038.

61–90 days

Planned

No top risks fall in this window

METHODOLOGY

How this assessment was produced

Risk scoring

Risk = severity × exposure × data sensitivity × activity

Factor	Values
Severity	critical 10 high 7 medium 4 low 1
Exposure	public 2 internal 1
Data sensitivity	PII 2 financial 2 health 2 internal 1.2 public 1
Activity	anomalous 1.5 normal 1

Likelihood: public = 4, internal = 2; +1 if anomalous access; max 5

Sources: configuration findings · data inventory · authentication logs

Scoring model version 1.0 · data generated 6 November 2026

Anomaly rules

Login from new country
First login from this country for the user in the last 90 days

Impossible travel
Two logins too far apart to travel between in the time given (over 900 km/h)

Off-hours admin login
Admin or root login outside 08:00-18:00 local time

Excessive failed logins
5 or more failed logins from one IP against one asset within 15 minutes

Unusual data access
Records read more than 5x the user's 90-day average for the asset