



INSTITUTO TECNOLÓGICO DE TORREÓN

Administrador de servidores

Actividad 1: Entregar un documento con el reporte de la práctica que deberá contener las pantallas completas y documentadas de la Instalación, configuración y los resultados sobre el Servidor FTP, Necesario para mostrar los archivos que necesitemos compartir a traves de server.

Unidad 5


Alumna: Judith Isabel Enriquez Aguirre

01/12/2025

OBJETIVO

El objetivo de esta práctica es instalar, configurar y comprobar el funcionamiento de un servidor FTP en Ubuntu Server, permitiendo el intercambio de archivos entre el servidor y un cliente Windows. Se busca comprender el proceso de instalación del servicio, la creación de usuarios, la configuración de permisos y el uso de un cliente FTP para conectarse y transferir archivos, asegurando que el servicio funcione correctamente dentro de la red establecida.

IP del servidor

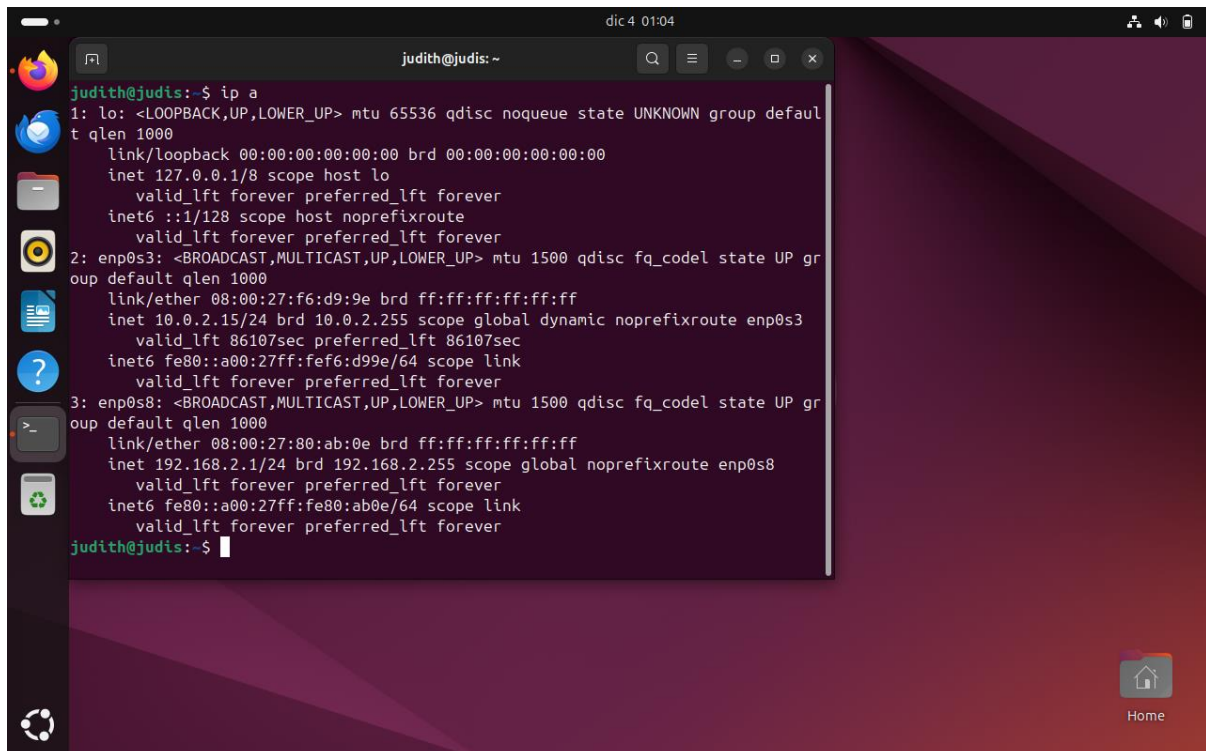

A terminal window titled "judith@judis: ~" is open on a desktop environment. The window shows the output of the command "ip a". The output lists three network interfaces: "lo" (loopback), "enp0s3" (ethernet), and "enp0s8" (ethernet). Each interface shows its state, MTU, QoS discipline, and various flags. The "lo" interface is in a "UNKNOWN" state. The "enp0s3" and "enp0s8" interfaces are in an "UP" state. The "enp0s3" interface has an IPv4 address of 10.0.2.15 and an IPv6 address of fe80::a00:27ff:fef6:d99e/64. The "enp0s8" interface has an IPv4 address of 192.168.2.1 and an IPv6 address of fe80::a00:27ff:fe80:ab0e/64. The terminal window is set against a dark purple background with a sidebar on the left containing various application icons.

```
judith@judis:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:f6:d9:9e brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
        valid_lft 86107sec preferred_lft 86107sec
    inet6 fe80::a00:27ff:fef6:d99e/64 scope link
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:80:ab:0e brd ff:ff:ff:ff:ff:ff
    inet 192.168.2.1/24 brd 192.168.2.255 scope global noprefixroute enp0s8
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe80:ab0e/64 scope link
        valid_lft forever preferred_lft forever
judith@judis:~$
```

FTP instalado

```
dic 4 01:05
judith@judis: ~
inet 127.0.0.1/8 scope host lo
    valid_lft forever preferred_lft forever
inet6 ::1/128 scope host noprefixroute
    valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP gr
oup default qlen 1000
    link/ether 08:00:27:f6:d9:9e brd ff:ff:ff:ff:ff:ff
    inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3
        valid_lft 86107sec preferred_lft 86107sec
    inet6 fe80::a00:27ff:fef6:d99e/64 scope link
        valid_lft forever preferred_lft forever
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP gr
oup default qlen 1000
    link/ether 08:00:27:80:ab:0e brd ff:ff:ff:ff:ff:ff
    inet 192.168.2.1/24 brd 192.168.2.255 scope global noprefixroute enp0s8
        valid_lft forever preferred_lft forever
    inet6 fe80::a00:27ff:fe80:ab0e/64 scope link
        valid_lft forever preferred_lft forever
judith@judis:~$ apt list --installed | grep vsftpd
WARNING: apt does not have a stable CLI interface. Use with caution in scripts.
vsftpd/noble-updates,nobw 3.0.5-0ubuntu3.1 amd64 [instalado]
judith@judis:~$
```

Archivo de configuración del FTP

```
dic 4 01:06
judith@judis: ~
GNU nano 7.2 /etc/vsftpd.conf
# This directive enables listening on IPv6 sockets. By default, listening
# on the IPv6 "any" address (:::) will accept connections from both IPv6
# and IPv4 clients. It is not necessary to listen on *both* IPv4 and IPv6
# sockets. If you want that (perhaps because you want to listen on specific
# addresses) then you must run two copies of vsftpd with two configuration
# files.
listen_ipv6=NO
#
# Allow anonymous FTP? (Disabled by default).
anonymous_enable=NO
#
# Uncomment this to allow local users to log in.
local_enable=YES
#
# Uncomment this to enable any form of FTP write command.
write_enable=YES
#
# Default umask for local users is 077. You may wish to change this to 022,
# if your users expect that (022 is used by most other ftpd's)
local_umask=022
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute  ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify  ^_ Go To Line
```


FTP existe

```
judith@judis: ~  
oup default qlen 1000  
link/ether 08:00:27:f6:d9:9e brd ff:ff:ff:ff:ff:ff  
inet 10.0.2.15/24 brd 10.0.2.255 scope global dynamic noprefixroute enp0s3  
    valid_lft 86107sec preferred_lft 86107sec  
inet6 fe80::a00:27ff:fe6:d99e/64 scope link  
    valid_lft forever preferred_lft forever  
3: enp0s8: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP gr  
oup default qlen 1000  
link/ether 08:00:27:80:ab:0e brd ff:ff:ff:ff:ff:ff  
inet 192.168.2.1/24 brd 192.168.2.255 scope global noprefixroute enp0s8  
    valid_lft forever preferred_lft forever  
inet6 fe80::a00:27ff:fe80:ab0e/64 scope link  
    valid_lft forever preferred_lft forever  
judith@judis:~$ apt list --installed | grep vsftpd  
  
WARNING: apt does not have a stable CLI interface. Use with caution in scripts.  
  
vsftpd/noble-updates,now 3.0.5-0ubuntu3.1 amd64 [instalado]  
judith@judis:~$ sudo nano /etc/vsftpd.conf  
[sudo] password for judith:  
judith@judis:~$ cat /etc/passwd | grep ftpuser  
ftpuser:x:1001:1001:JUDIS,JUDITH,8721142028,8721134448,8721345662:/home/ftpuser:  
/bin/bash  
judith@judis:~$
```


Estado del servicio FTP


```
judith@judis: ~  
judith@judis:~$ sudo systemctl status vsftpd  
[sudo] password for judith:  
● vsftpd.service - vsftpd FTP server  
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; enabled; preset: en  
   Active: active (running) since Thu 2025-12-04 00:59:54 UTC; 7min ago  
     Process: 1212 ExecStartPre=/bin/mkdir -p /var/run/vsftpd/empty (code=exited  
   Main PID: 1213 (vsftpd)  
      Tasks: 1 (limit: 4870)  
     Memory: 1000.0K (peak: 17.9M)  
        CPU: 313ms  
     CGroup: /system.slice/vsftpd.service  
             └─1213 /usr/sbin/vsftpd /etc/vsftpd.conf  
  
dic 04 00:59:54 judis systemd[1]: Starting vsftpd.service - vsftpd FTP server...  
dic 04 00:59:54 judis systemd[1]: Started vsftpd.service - vsftpd FTP server.  
dic 04 01:02:18 judis vsftpd[2408]: pam_unix(vsftpd:auth): check pass; user unk  
dic 04 01:02:18 judis vsftpd[2408]: pam_unix(vsftpd:auth): authentication failu  
lines 1-15/15 (END)
```

FTP en el mismo servidor

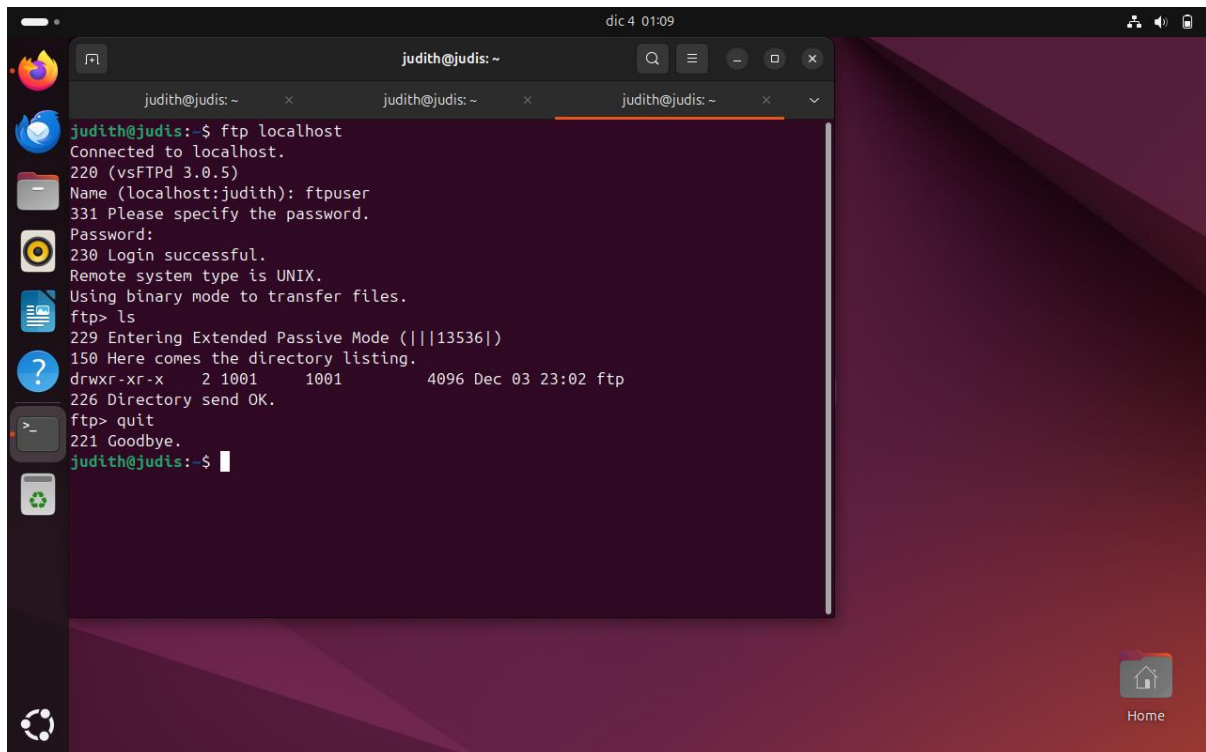

PRUEBA FTP desde Windows 7

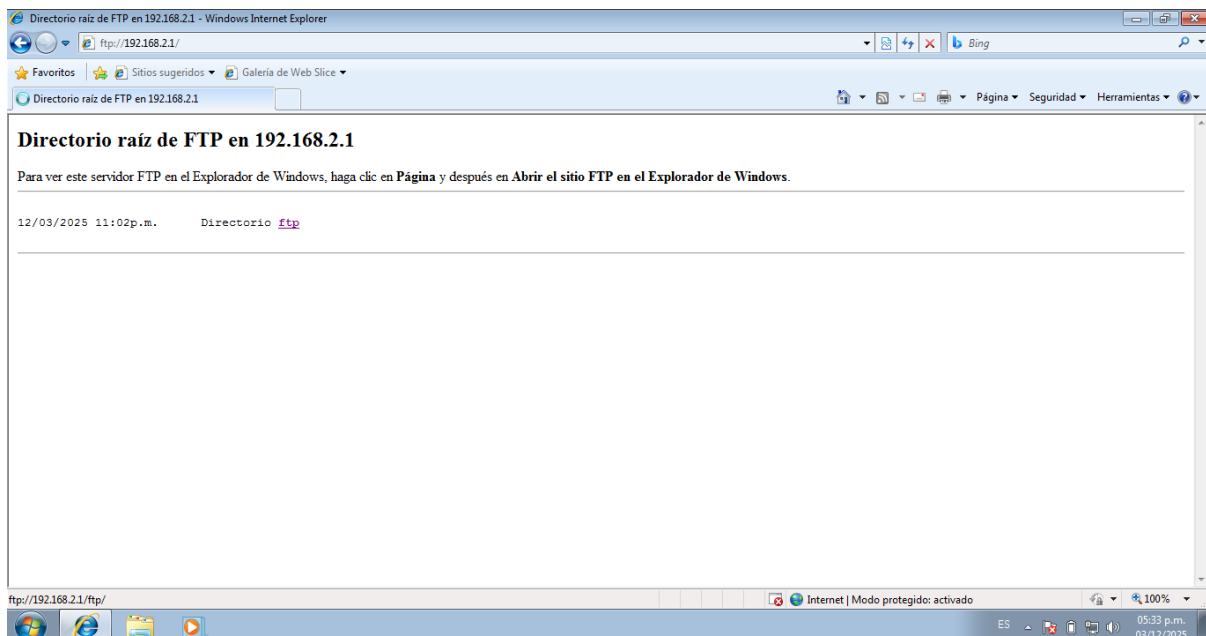

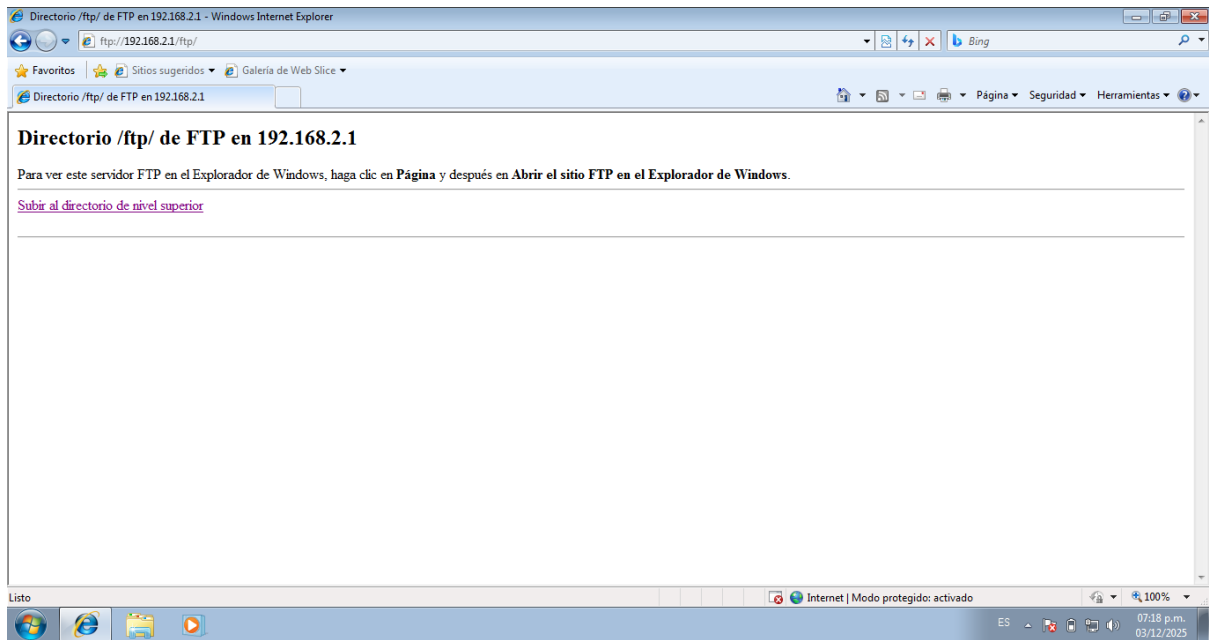

CONCLUSIÓN

Durante la práctica se logró configurar exitosamente un servidor FTP, permitiendo la conexión desde un cliente Windows y la transferencia de archivos (no puse algún archivo, pero sin problema, todo funciono correctamente). Se comprobó el acceso mediante FTP validando así que el servicio está instalado, funcionando y accesible en la red. Además, se reforzaron conocimientos sobre la administración de servicios en Ubuntu Server, manejo de usuarios, permisos y verificación del funcionamiento de la red. Esta práctica permitió entender la importancia del FTP como herramienta para compartir información dentro de un entorno administrativo.