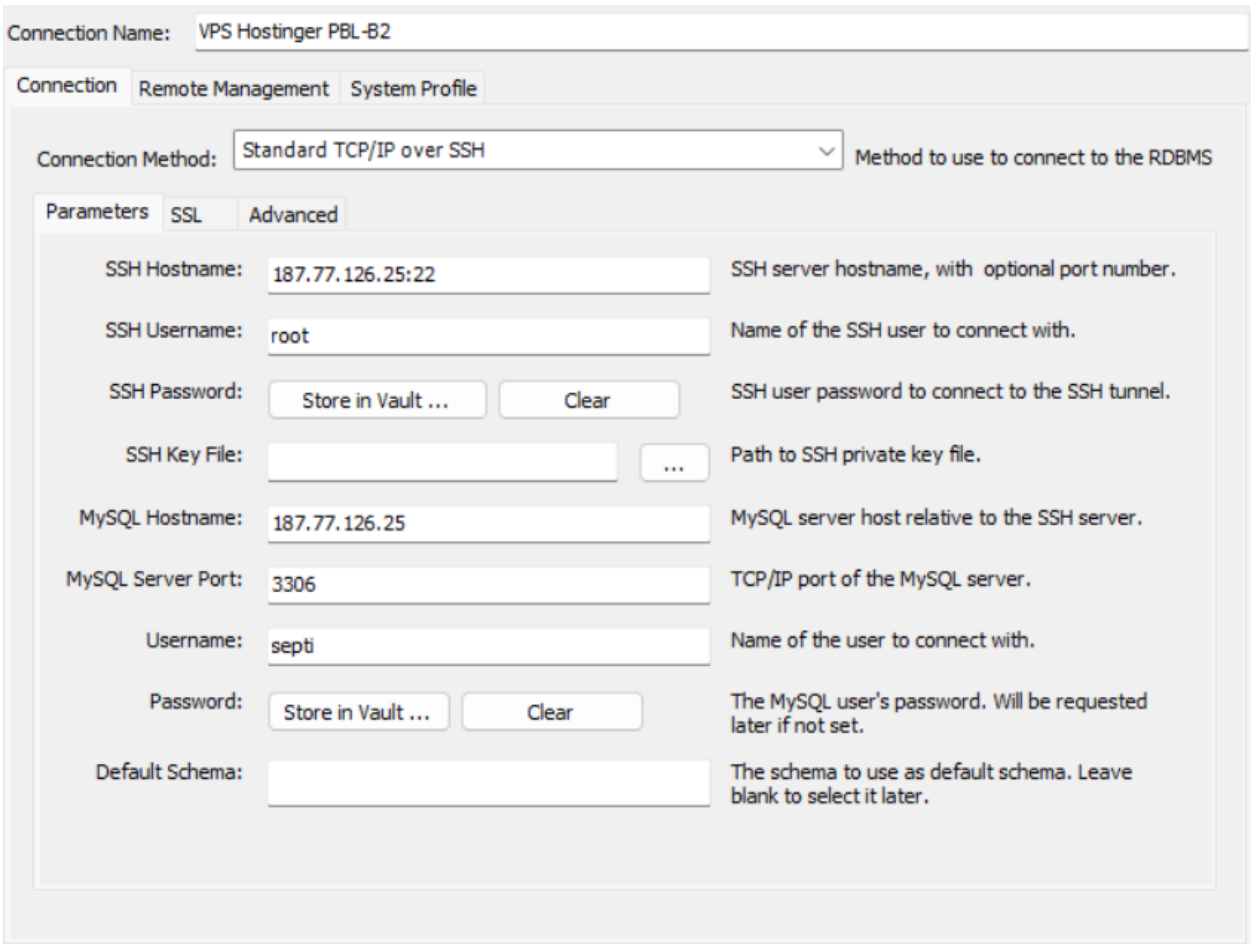
Via Putty

Konfigurasi Database MySQL di VPS Hostinger

1. sudo apt install mysql-server
2. sudo mysql_secure_installation
3. sudo systemctl status MySQL
4. sudo MySQL

Konfigurasi Database MySQL di Local PC denga IDE MySQLWorkbench remote di VPS Hostinger

1. sudo nano /etc/mysql/mysql.conf.d/mysqld.cnf
2. cari parameter ==> bind-address = 0.0.0.0
3. Simpan (CTRL+O & ENTER) dan Keluar (CTRL+X)
4. sudo systemctl restart mysql
5. sudo mysql -u root -p
6. mysql> CREATE USER 'septi'@'%' IDENTIFIED BY 'password_kuat';
7. mysql> GRANT ALL PRIVILEGES ON *.* TO 'septi'@'%';
8. mysql> FLUSH PRIVILEGES;
9. mysql> EXIT;
10. sudo ufw allow 3306/tcp

11. 
Connection Name: VPS Hostinger PBL-B2
Connection
Remote Management
System Profile
Connection Method: Standard TCP/IP over SSH
Method to use to connect to the RDBMS
Parameters
SSL
Advanced
SSH Hostname: 187.77.126.25:22
SSH server hostname, with optional port number.
SSH Username: root
Name of the SSH user to connect with.
SSH Password: Store in Vault ... Clear
SSH user password to connect to the SSH tunnel.
SSH Key File: ...
Path to SSH private key file.
MySQL Hostname: 187.77.126.25
MySQL server host relative to the SSH server.
MySQL Server Port: 3306
TCP/IP port of the MySQL server.
Username: septi
Name of the user to connect with.
Password: Store in Vault ... Clear
The MySQL user's password. Will be requested later if not set.
Default Schema:
The schema to use as default schema. Leave blank to select it later.