

KONFIGURASI SERVER MYSQL DI VPS


1. Instal mysql server di pvs => sudo apt install mysql-server

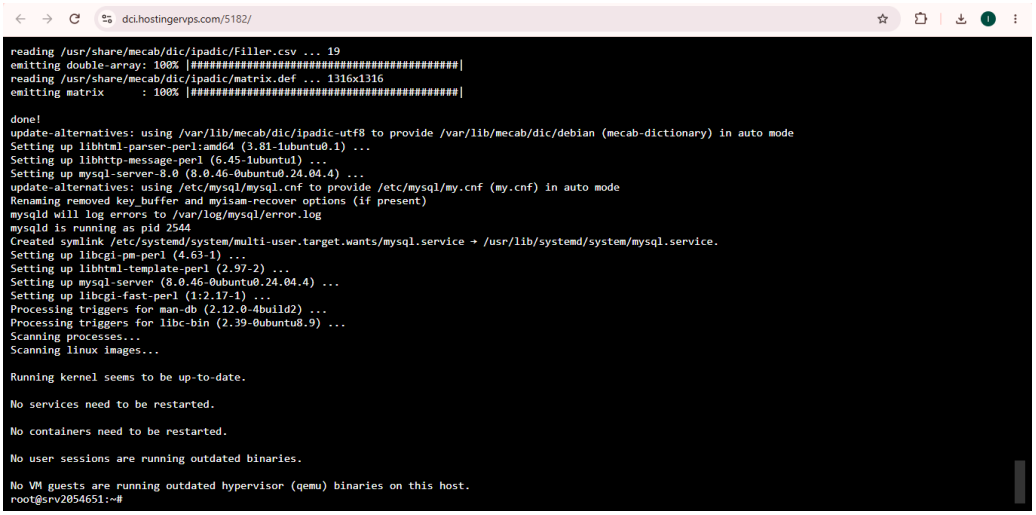

2. Konfigurasi keamanan mysql => sudo mysql_secure_installation

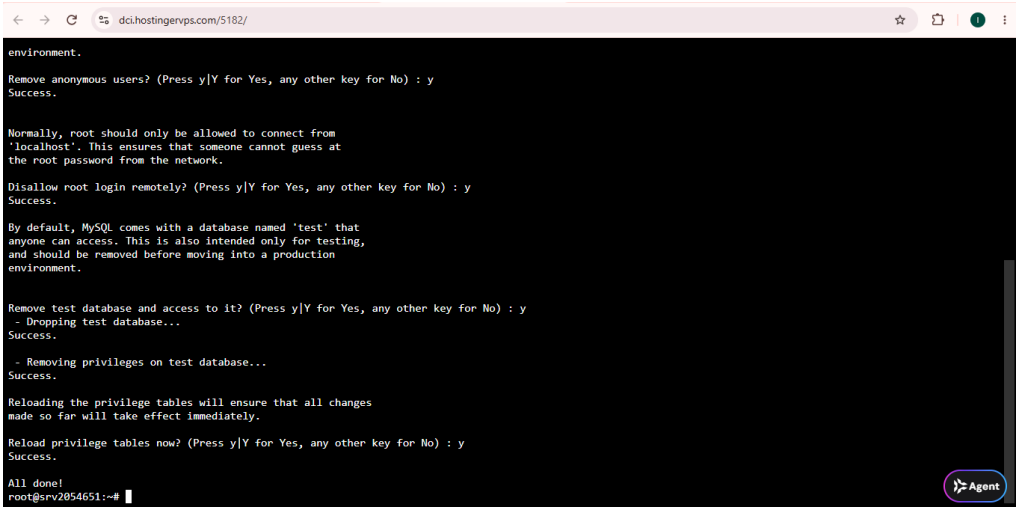

3. Memastikan services mysql sudah berjalan => sudo systemctl status mysql

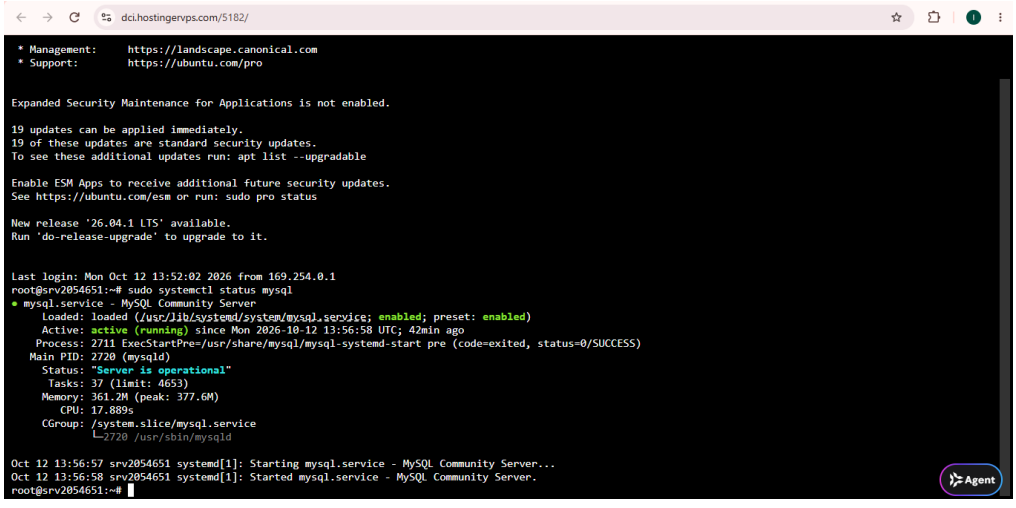

4. Masuk ke dalam sistem database => sudo mysql

```
root@srv2054651:~# sudo mysql
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 10
Server version: 8.0.46-0ubuntu0.24.04.4 (Ubuntu)

Copyright (c) 2000, 2026, Oracle and/or its affiliates.


Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

KONFIGURASI MYSQL DI VPS DENGAN MYSQL WORKBENCH

1. Membuka Nano untuk edit file konfigurasi => sudo nano /etc/mysql/mysql.conf.d/mysqld.cnf

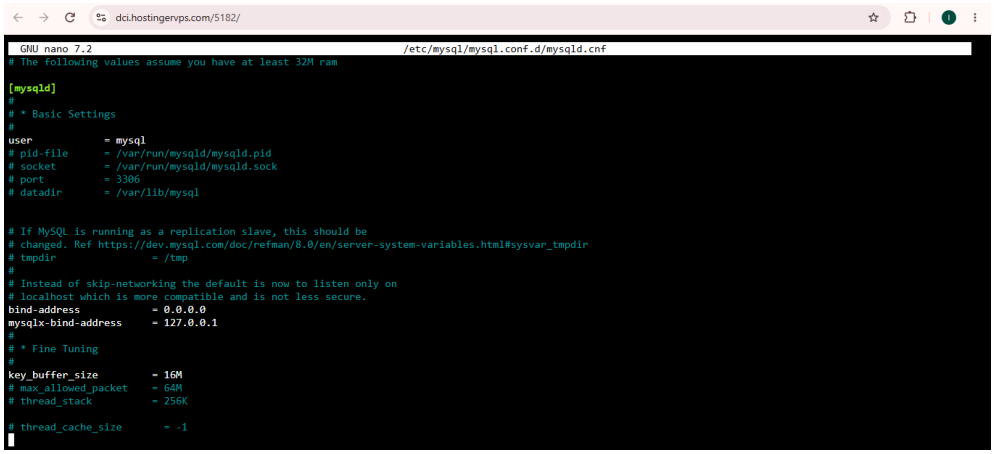

2. Restart service mysql di vps => sudo systemctl restart mysql

```
Last login: Mon Oct 12 14:37:59 2026 from 169.254.0.1
root@srv2054651:~# sudo nano /etc/mysql/mysql.conf.d/mysqld.cnf
root@srv2054651:~# sudo nano /etc/mysql/mysql.conf.d/mysqld.cnf
root@srv2054651:~# sudo systemctl restart mysql
root@srv2054651:~#
```

3. Masuk ke sistem mysql sebagai root => sudo mysql -u root -p

```
root@srv2054651:~# sudo mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 8
Server version: 8.0.46-0ubuntu0.24.04.4 (Ubuntu)

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

4. Membuat pengguna Baru => mysql> CREATE USER 'illyas'@'%' IDENTIFIED BY 'Illyas@1992@';

```
mysql>  CREATE USER 'illyas'@'%' IDENTIFIED BY 'Illyas@1992@';
Query OK, 0 rows affected (0.01 sec)

mysql>
```

5. Memberikan akses kepada pengguna baru => GRANT ALL PRIVILEGES ON *.* TO ‘illyas’@’%’;

```
mysql> GRANT ALL PRIVILEGES ON *.* TO 'illyas'@'%';
Query OK, 0 rows affected (0.01 sec)

mysql>
```

6. Refresh hak akses kepada pengguna tanpa restart database => FLUSH PRIVILEGES;

```
mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.00 sec)

mysql>
```


7. Keluar dari sistem mysql => EXIT;

```
mysql> EXIT;
Bye
root@srv2054651:~#
```

8. Membuka port 3306 di firewall vps => sudo ufw allow 3306/tcp


```
root@srv2054651:~# sudo ufw allow 3306/tcp
Rules updated
Rules updated (v6)
root@srv2054651:~#
```

SETTING KONFIGURASI DAN KONEKSI MYSQL WORKBENCH

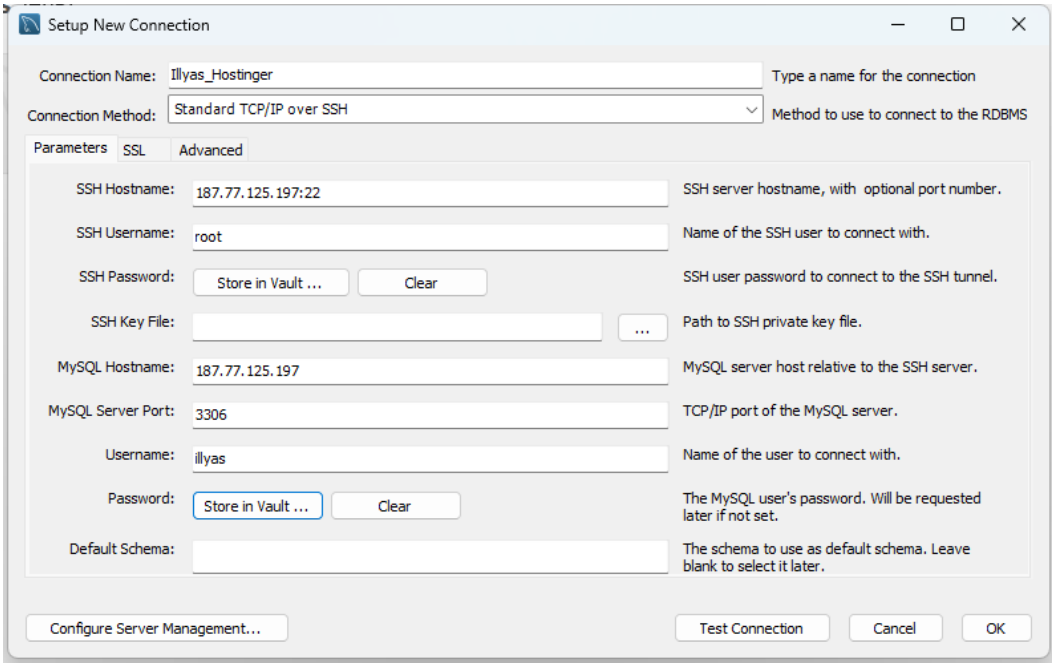

MENGUJI KONEKSI DATABASE ANTARA MYSQL WORKBENCH DAN VPS

1. Membuat database di mysql workbench=> CREATE DATABASE TEST_KONEKSI;
   Dan menampilkan database => SHOW DATABASES;

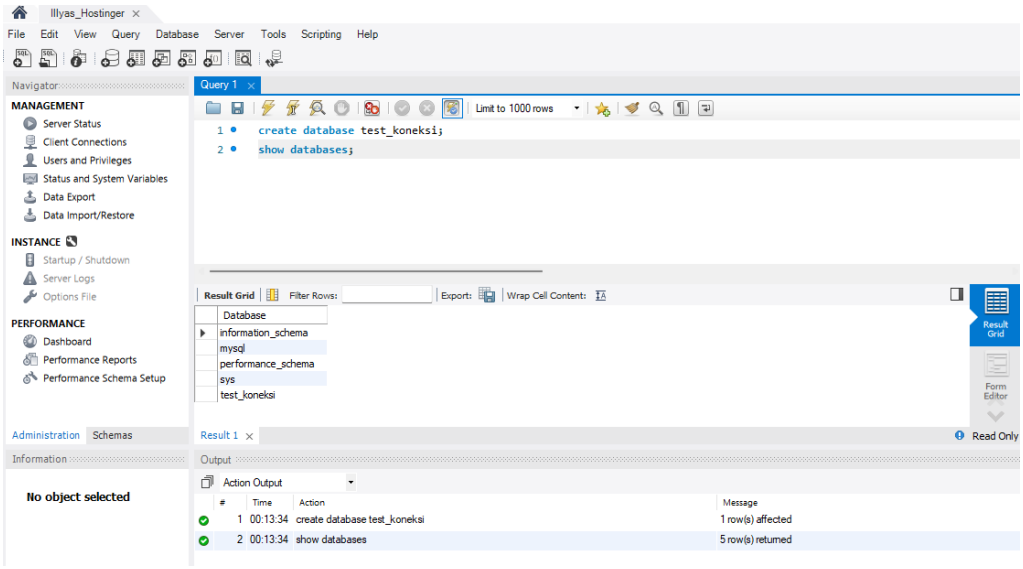

2. Menguji di VPS dengan mencoba menampilkan database
   Masuk ke database root => sudo mysql -u root -p
   Menampilkan database => mysql > show database;

```
Last login: Mon Oct 12 17:03:34 2026 from 169.254.0.1
root@srv2054651:~# sudo mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 13
Server version: 8.0.46-0ubuntu0.24.04.4 (Ubuntu)

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.


Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
| test_koneksi       |
+--------------------+
5 rows in set (0.00 sec)


mysql>
```

Di dalam mysql terdapat database yang tadi dibuat di mysql workbench yaitu **test_koneksi**


KONFIGURASI PUTTY UNTUK REMOTE

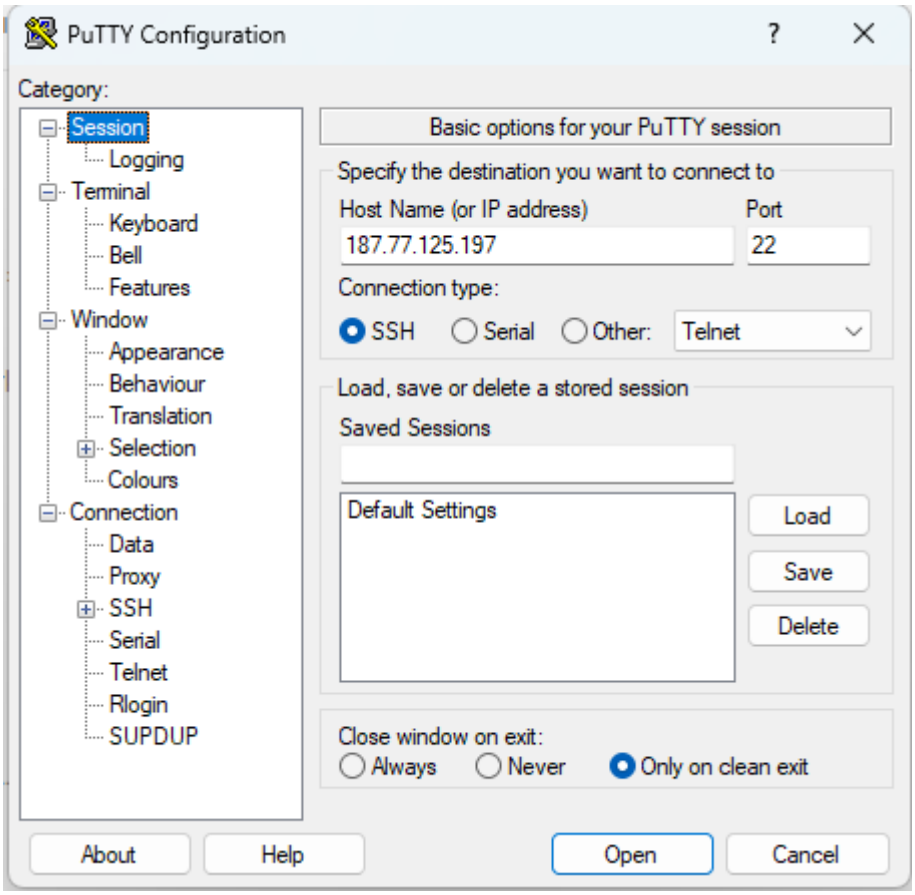


Kemudian klik Open dan akan membuka terminal dan meminta password mysql

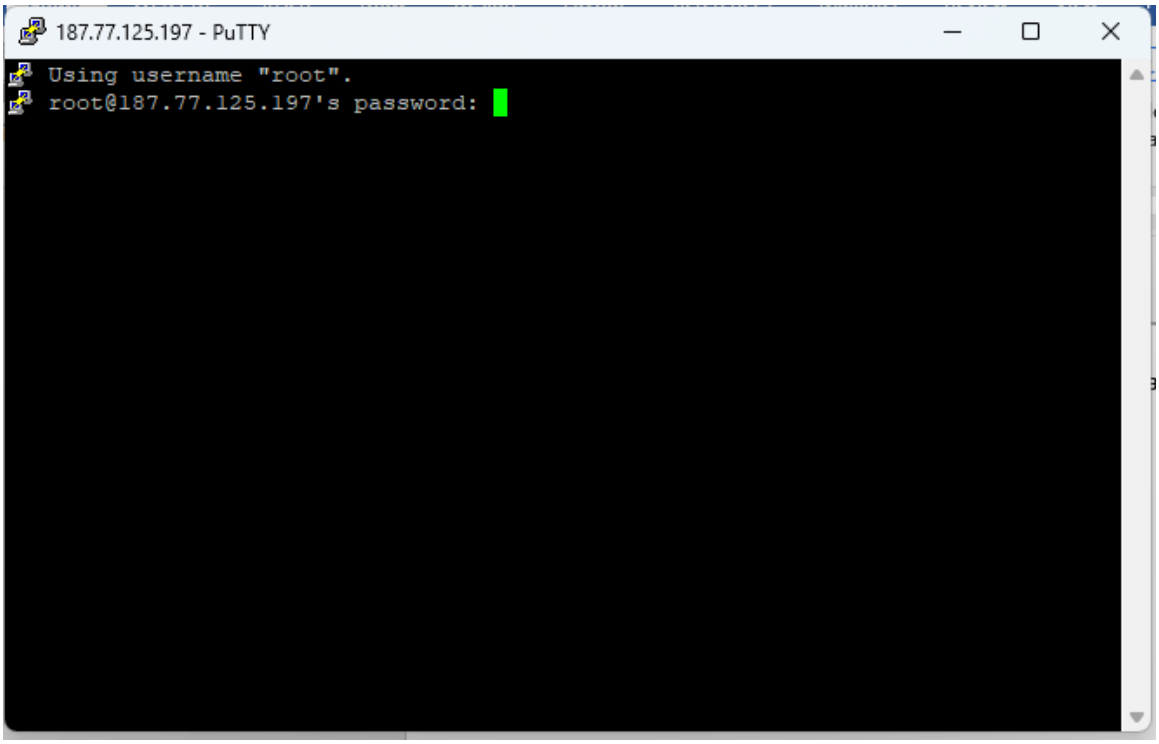


Setelah memasukan password akan tampil seperti dibawah ini

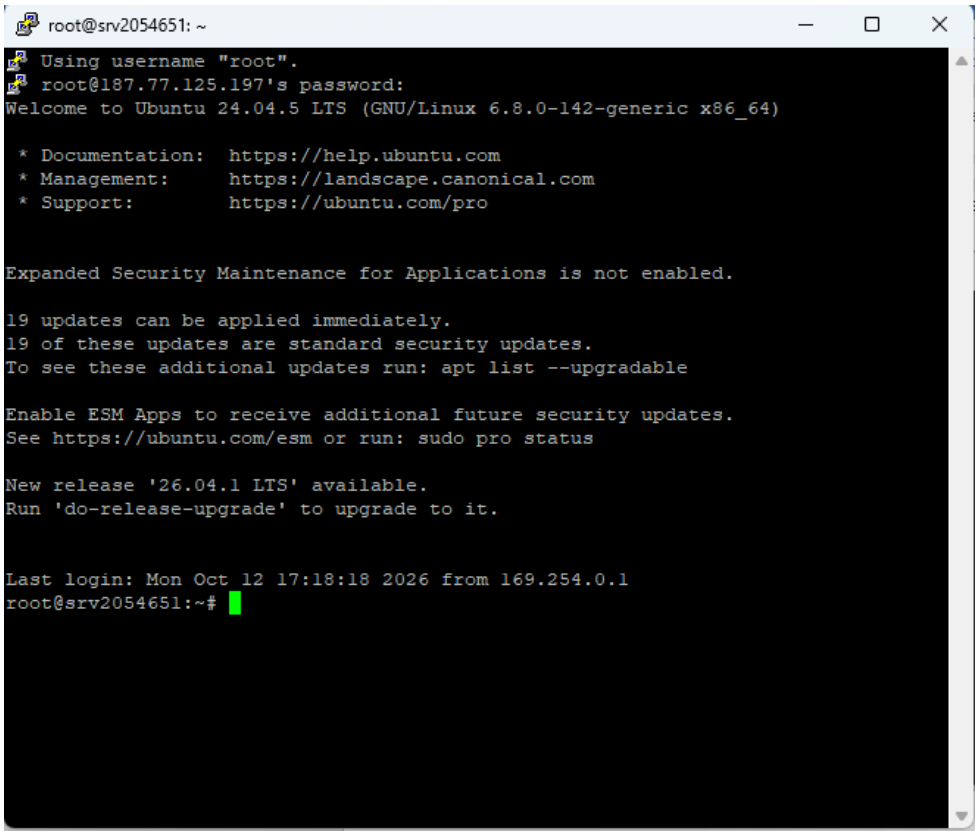

Masuk ke root mysql => sudo mysql -u root -p

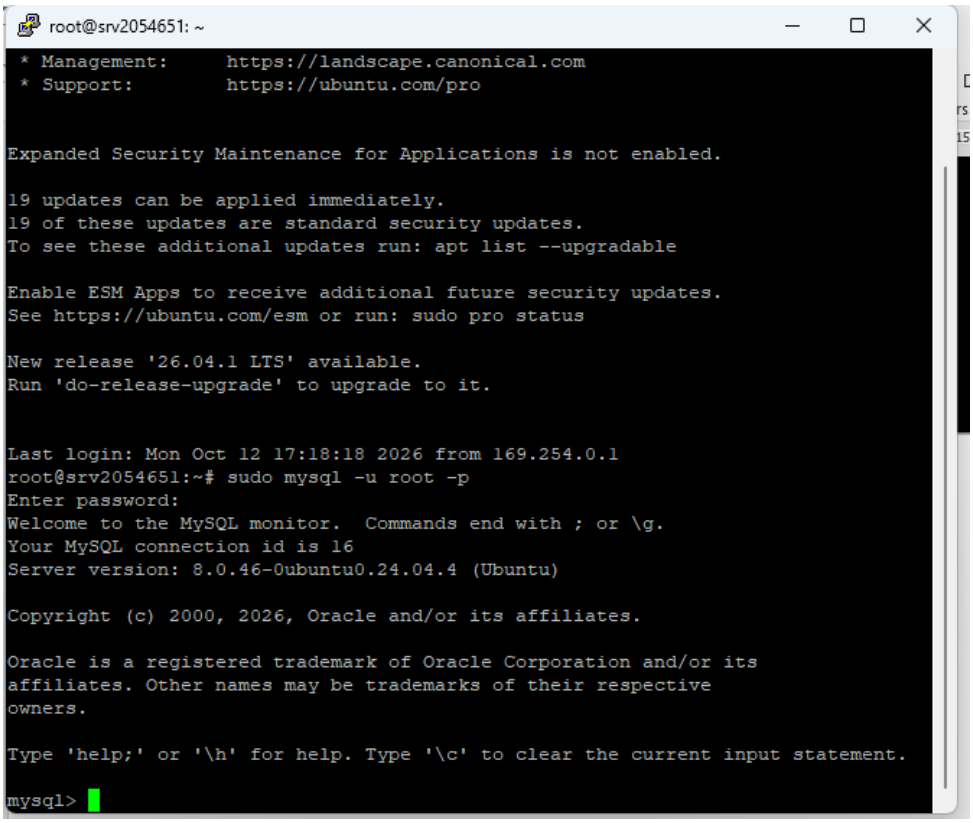

Tampilkan database di terminal putty => show databases;

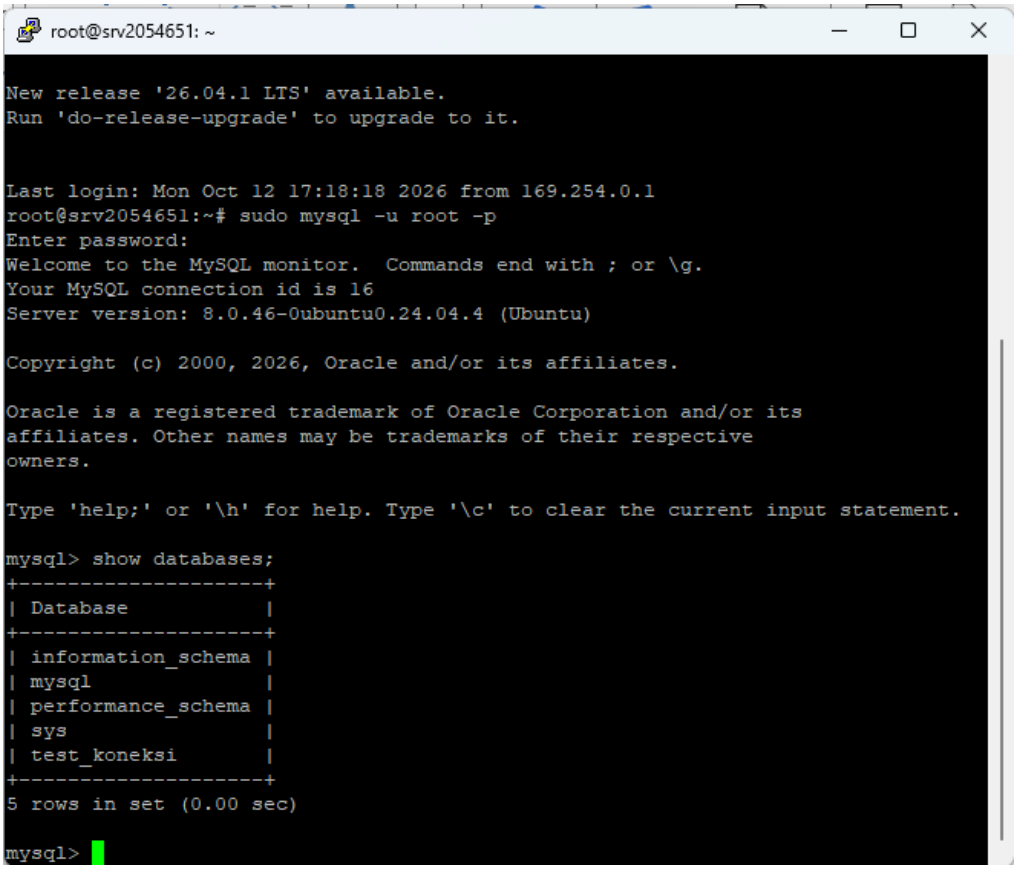


Mencoba menguji lagi dengan menghapus database yang tadi dibuat dimysql workbench => DROP DATABASE test_koneksi;

Dan tampilkan database

⇨ SHOW DATABASE;

Dan database sudah terhapus

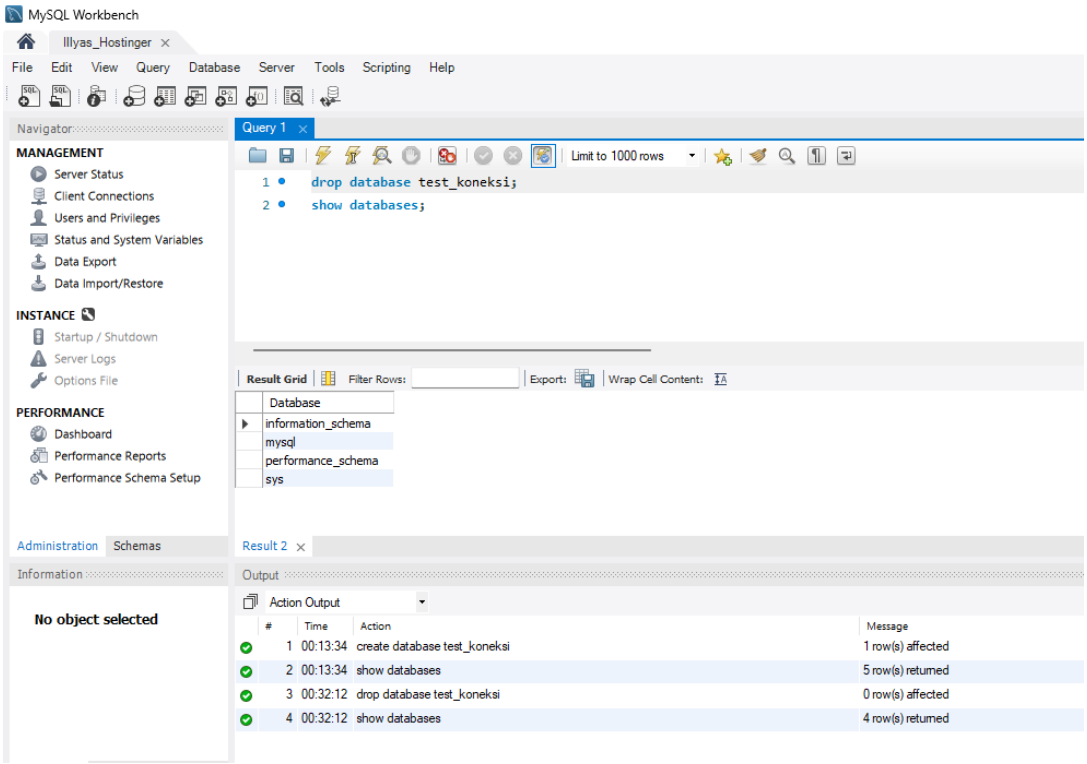

Mencoba melihat database di terminal VPS dan PUTTY

=> SHOW DATABASE;

VPS – database sudah tidak ada / terhapus

```
mysql> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
4 rows in set (0.00 sec)

mysql>
```

PUTTY - database sudah tidak ada / terhapus

