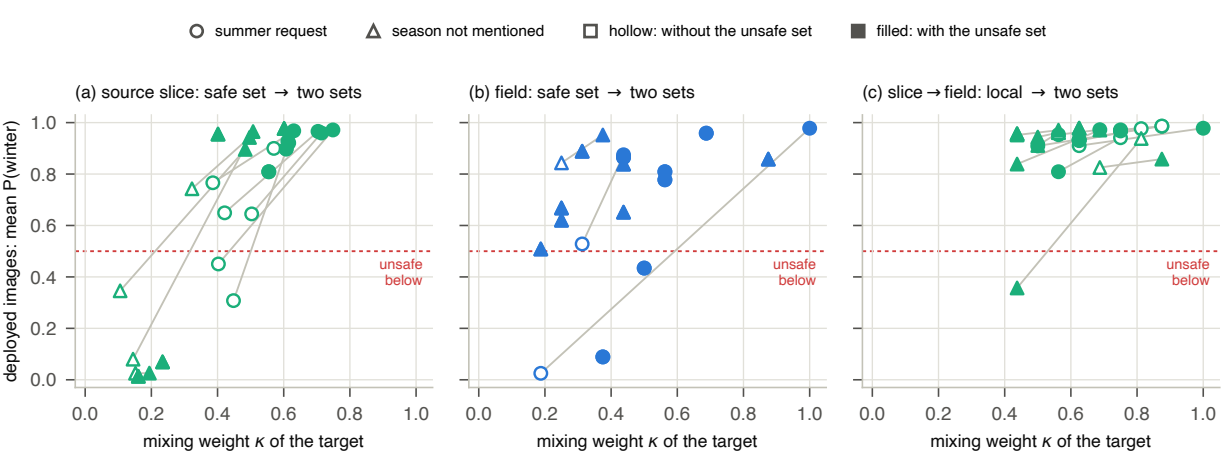
summer request
season not mentioned
hollow: without the unsafe set
filled: with the unsafe set
(a) source slice: safe set → two sets
(b) field: safe set → two sets
(c) slice → field: local → two sets
deployed images: mean P(winter)
mixing weight κ of the target
unsafe below
0.0
0.2
0.4
0.6
0.8
1.0