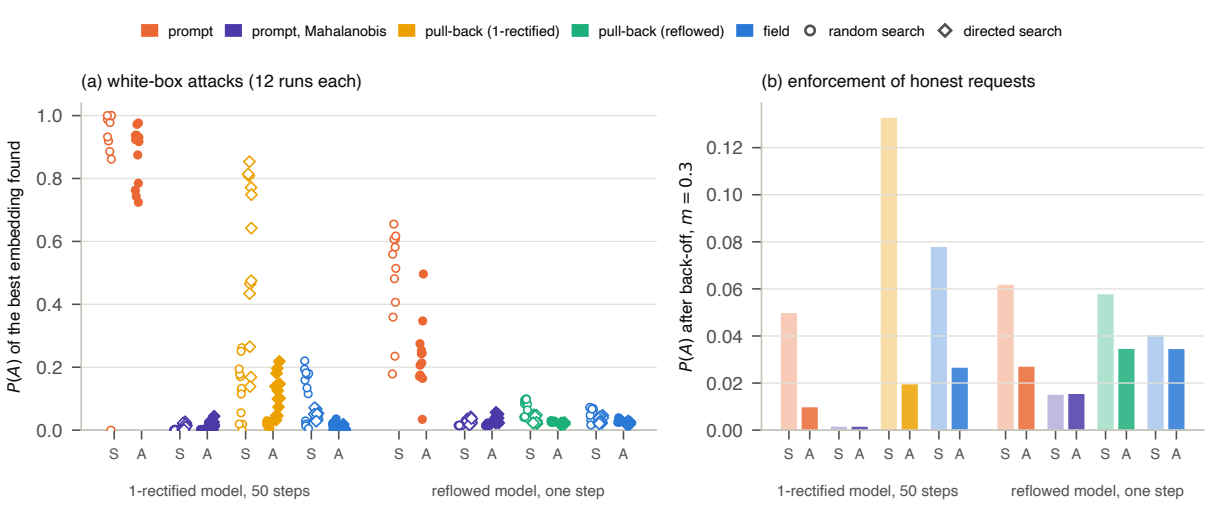
prompt
prompt, Mahalanobis
pull-back (1-rectified)
pull-back (reflowed)
field
random search
directed search
(a) white-box attacks (12 runs each)
P(A) of the best embedding found
1.0
0.8
0.6
0.4
0.2
0.0
S A S A S A S A S A S A S A S A
1-rectified model, 50 steps
reflowed model, one step
(b) enforcement of honest requests
P(A) after back-off, m = 0.3
0.12
0.10
0.08
0.06
0.04
0.02
0.00
S A S A S A S A S A S A S A S A
1-rectified model, 50 steps
reflowed model, one step