


Linkerd-enabled ARM worker — persistent runtime loop

One pinned pthread hosts one Tokio current_thread runtime for the worker lifetime.

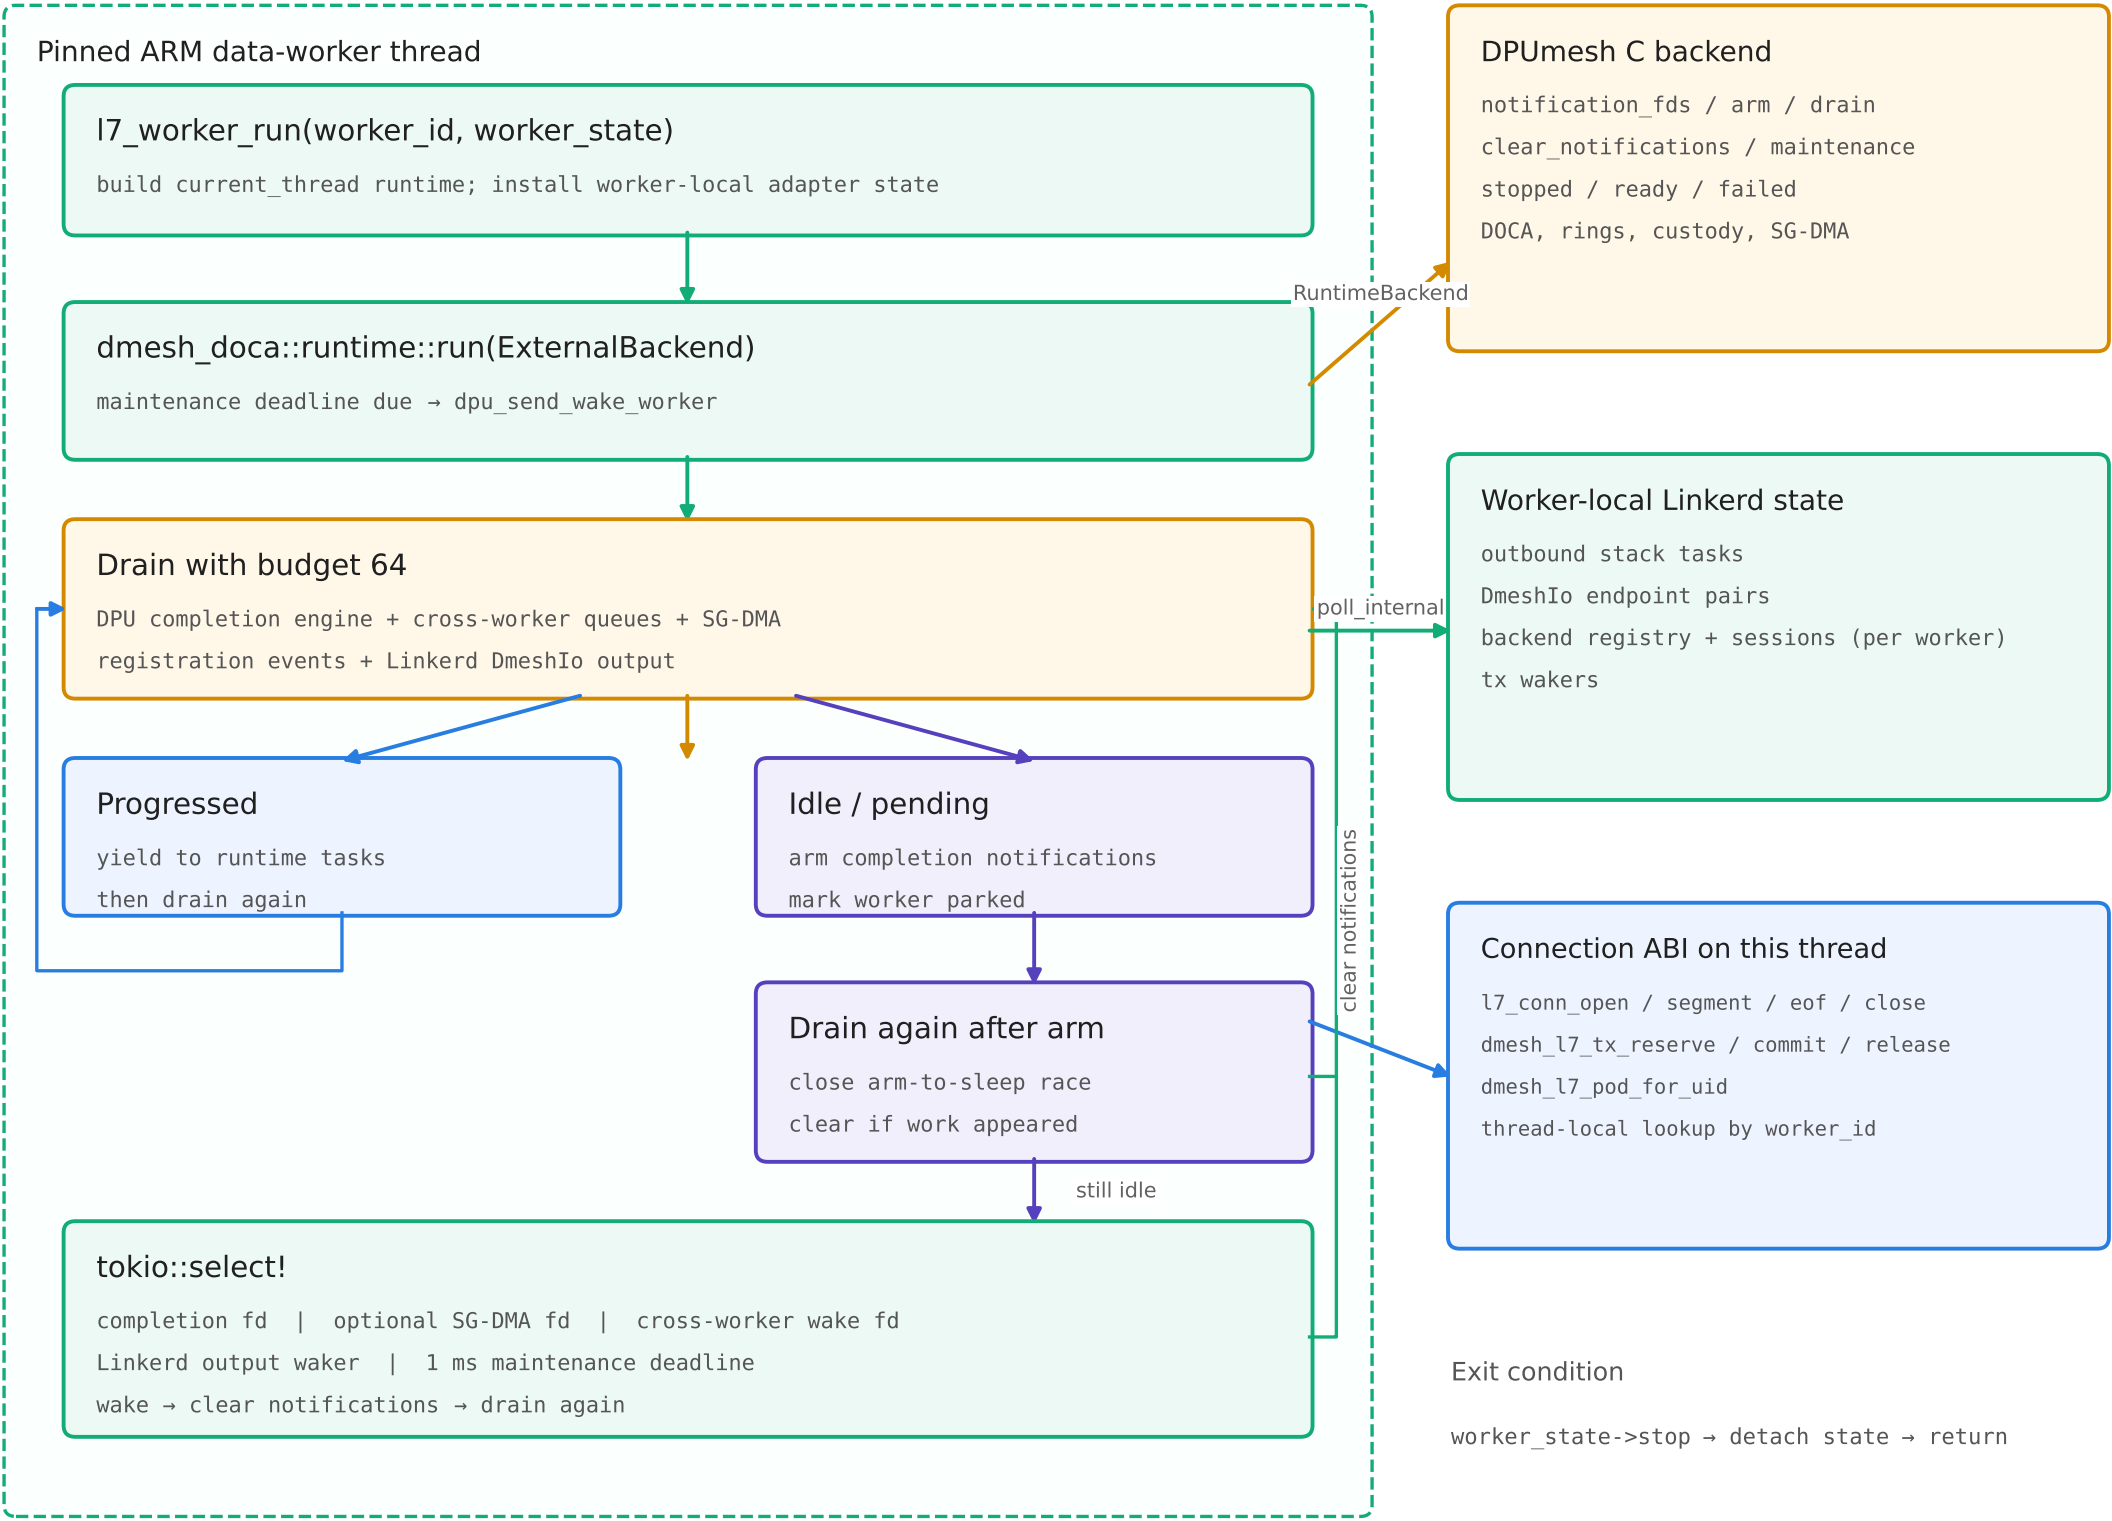

How to read this figure

drain	one bounded pass over each work source, 64 items
arm	ask a completion engine to raise its fd next time
DmeshIo	byte-stream endpoint the Linkerd stack reads/writes

segment	arrival bytes lent to the L7 layer until released
tx reserve / commit	write output into an egress buffer the DMA sends
maintenance	the 1 ms deadline for periodic worker work