


DPUMesh with embedded Linkerd — thread model

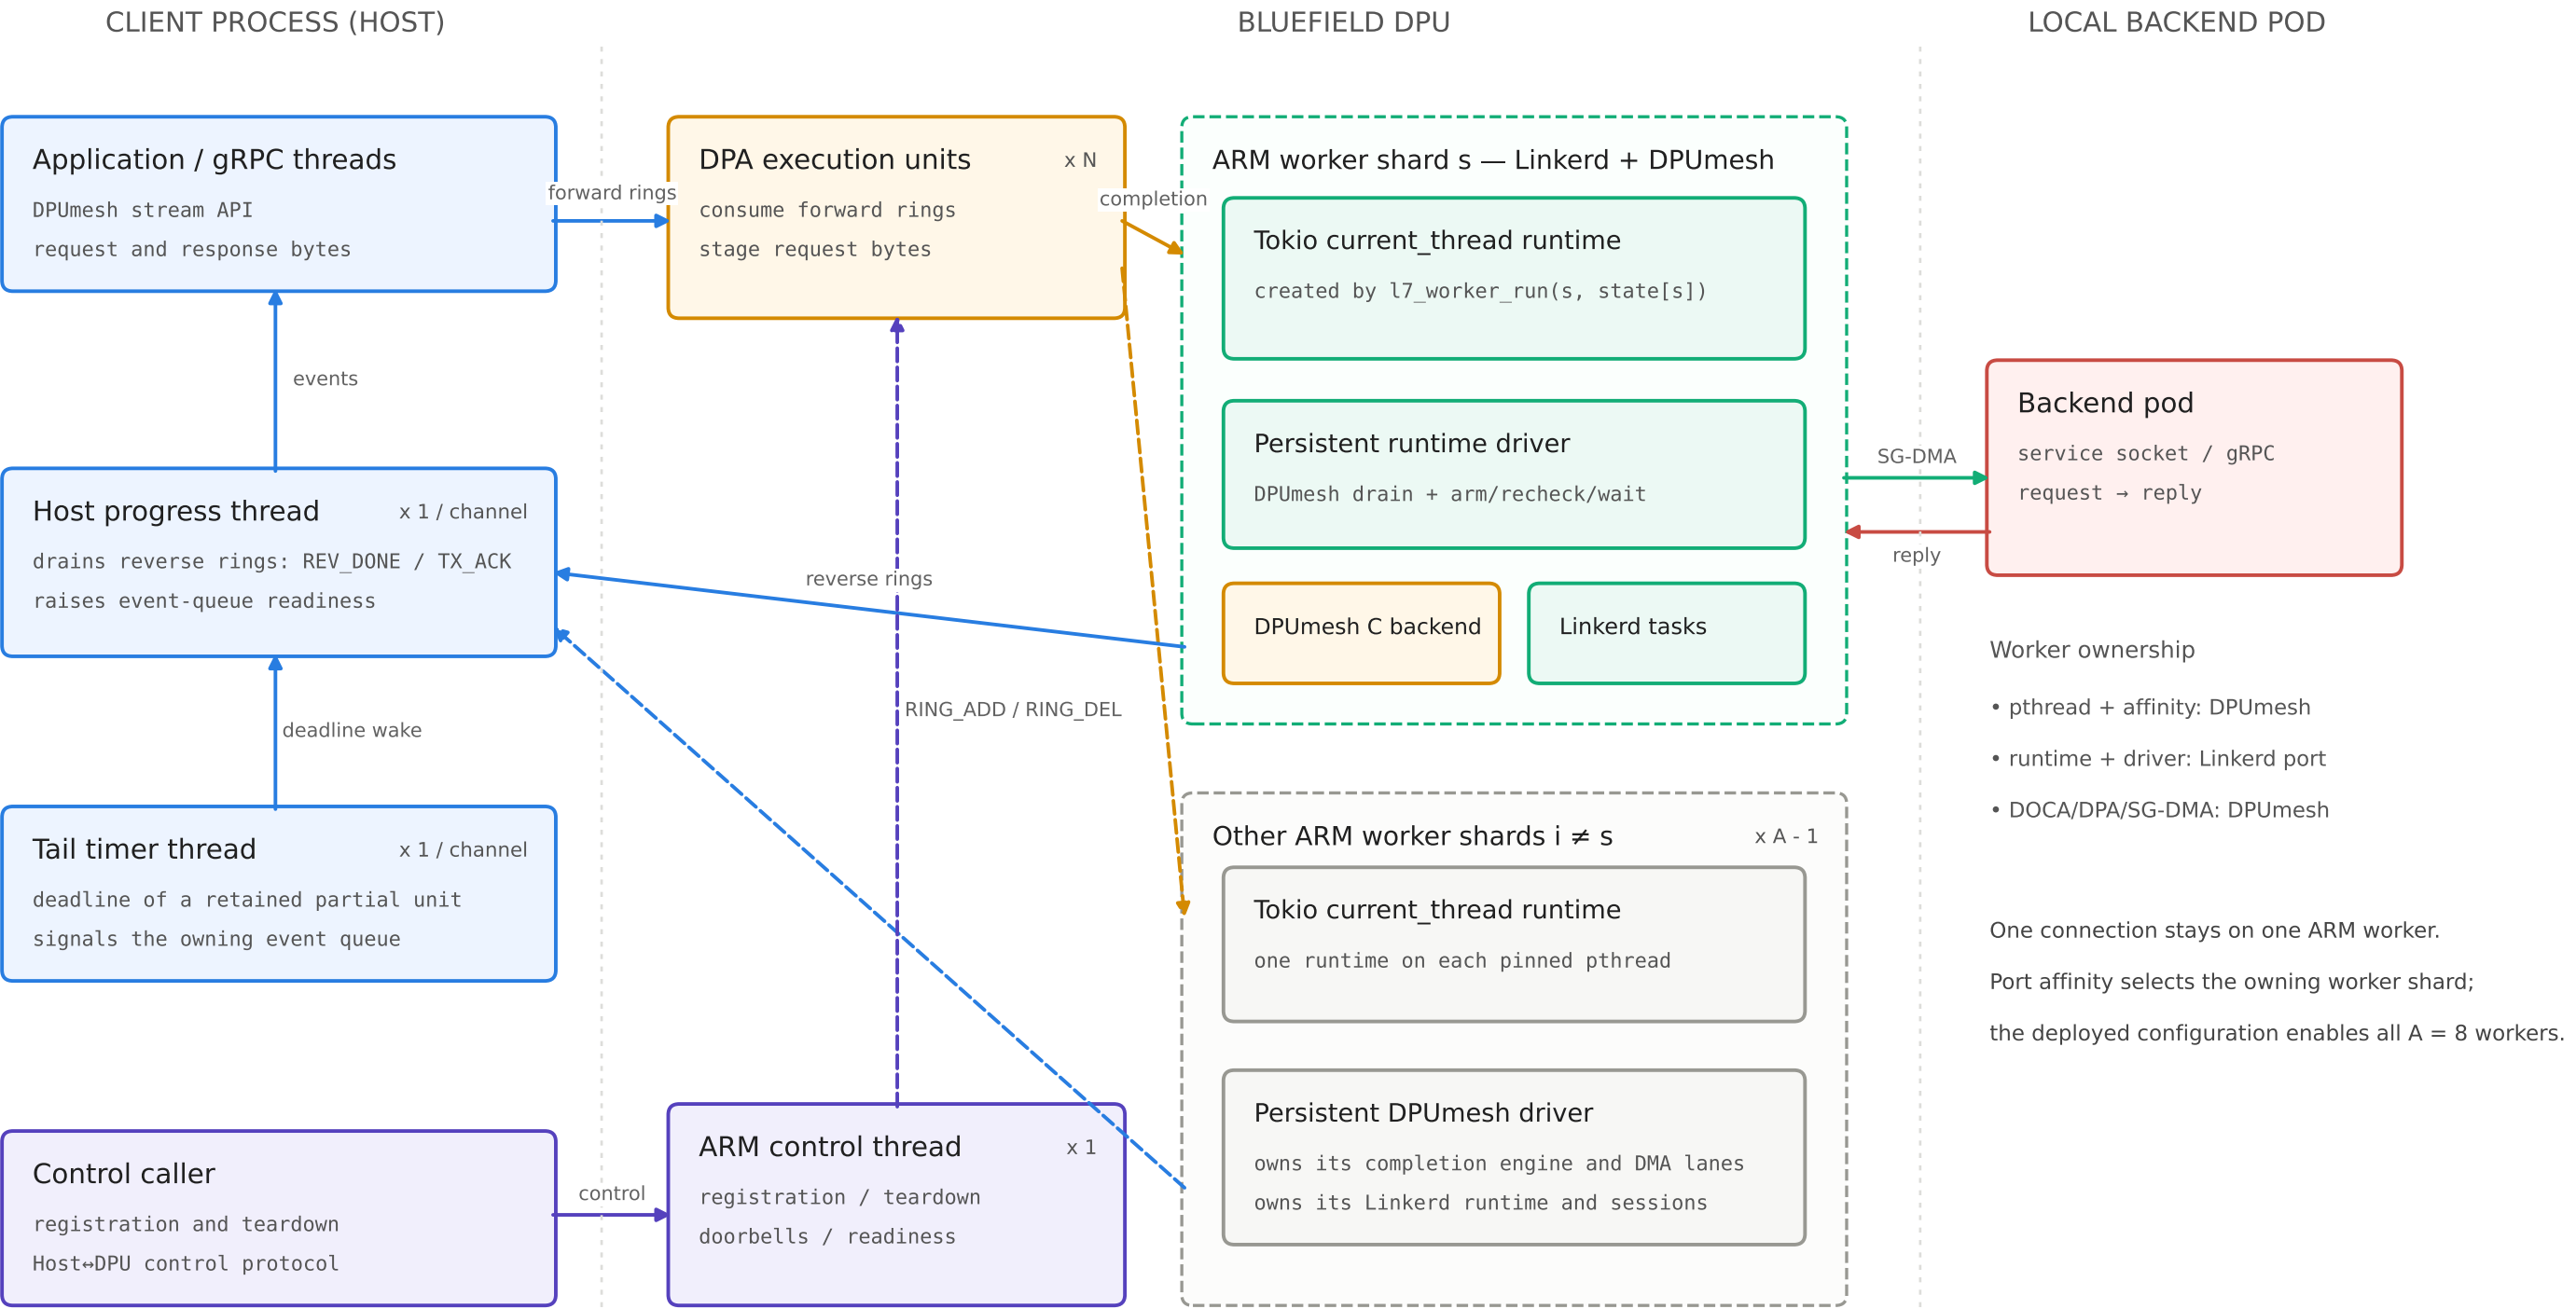

How to read this figure			
channel	one process's transport: registered memory and its rings	reverse ring	DPU→host completions: REV_DONE = delivered, TX_ACK = capacity
QP	one full-duplex byte stream on that channel	DPA execution unit	BlueField accelerator core that drains forward rings
event queue (EQ)	what one host thread polls for a QP's events	ARM data worker	DPU CPU thread owning routing, DMA and reverse publication
forward ring	host→DPU descriptor queue, K per registered pod	SG-DMA	scatter-gather DMA into the receiver's registered memory