


Where DPUMesh enters gRPC — both directions

Everything above the seam is stock gRPC. DPUMesh replaces only the transport below it.

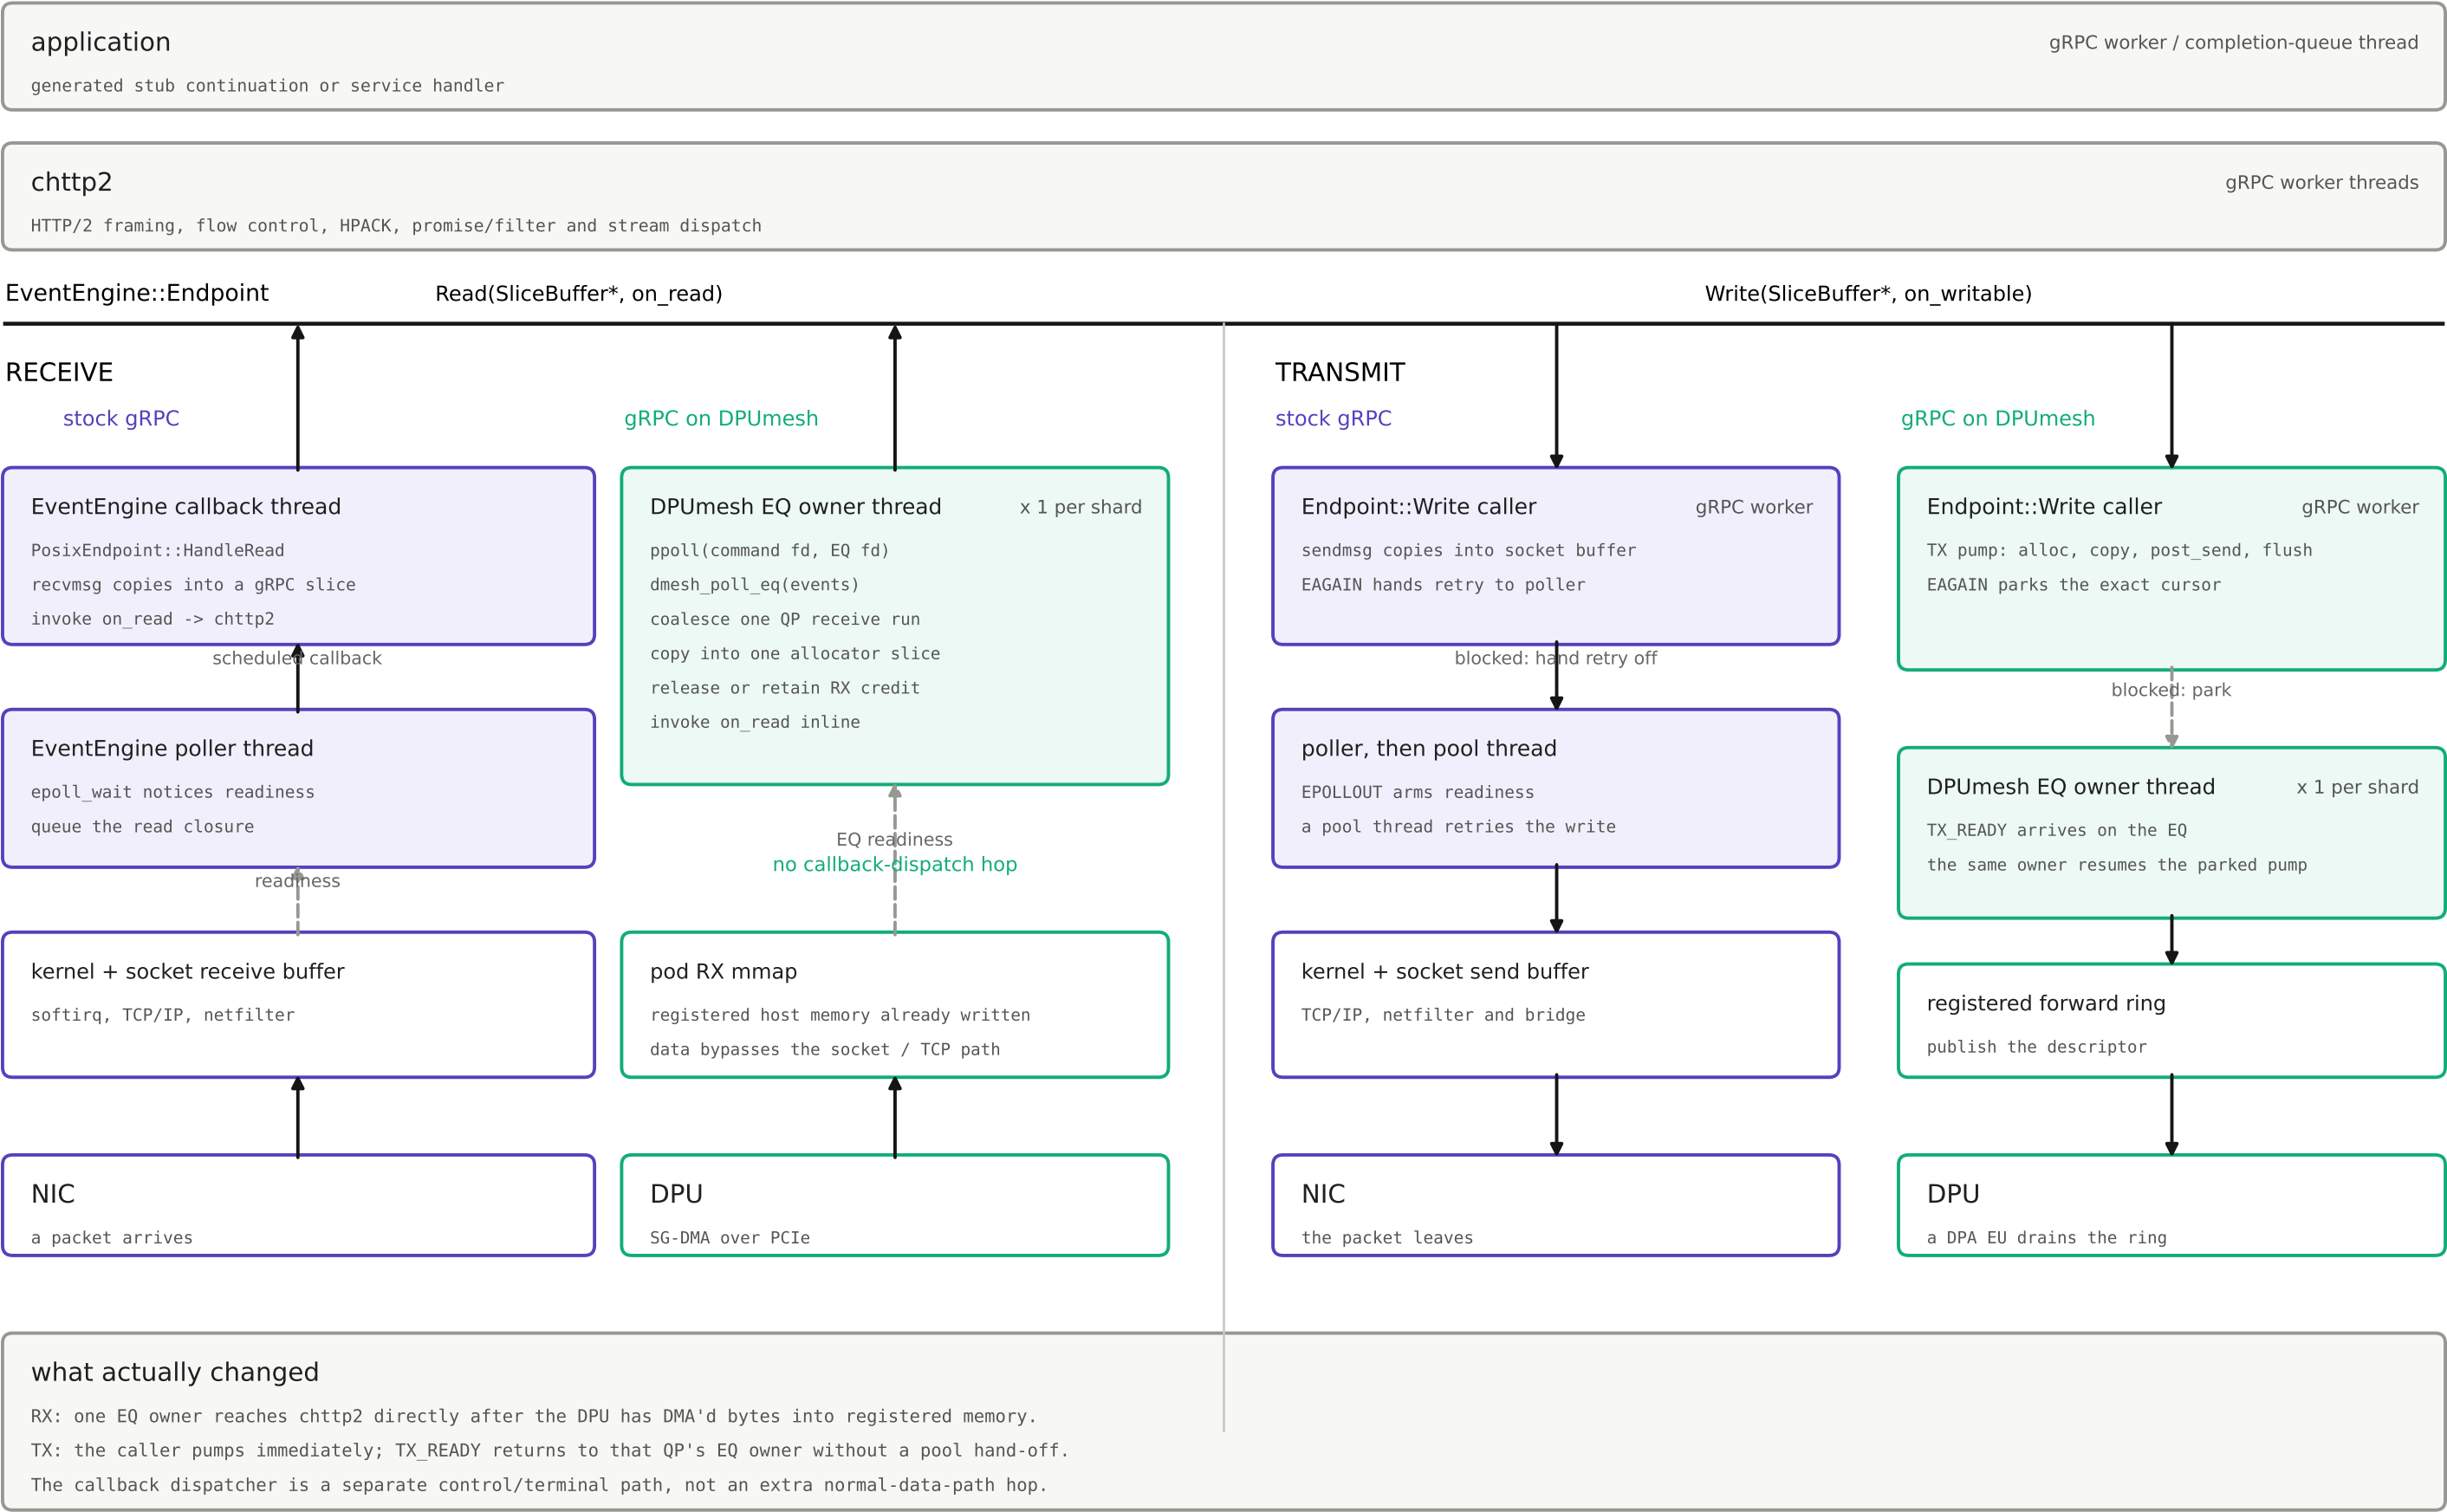

How to read this figure			
EventEngine	gRPC's transport interface; an Endpoint is one byte stream	EQ owner thread	the adapter's reactor shard: one thread per event queue
chttp2	gRPC's own HTTP/2 implementation, unchanged here	TX_READY	event saying a blocked stream may retry its send
QP	one full-duplex DPUMesh byte stream behind one Endpoint	pod RX mmap	registered host memory the DPU writes received bytes into