


Embedded Linkerd — runtime and ownership boundary

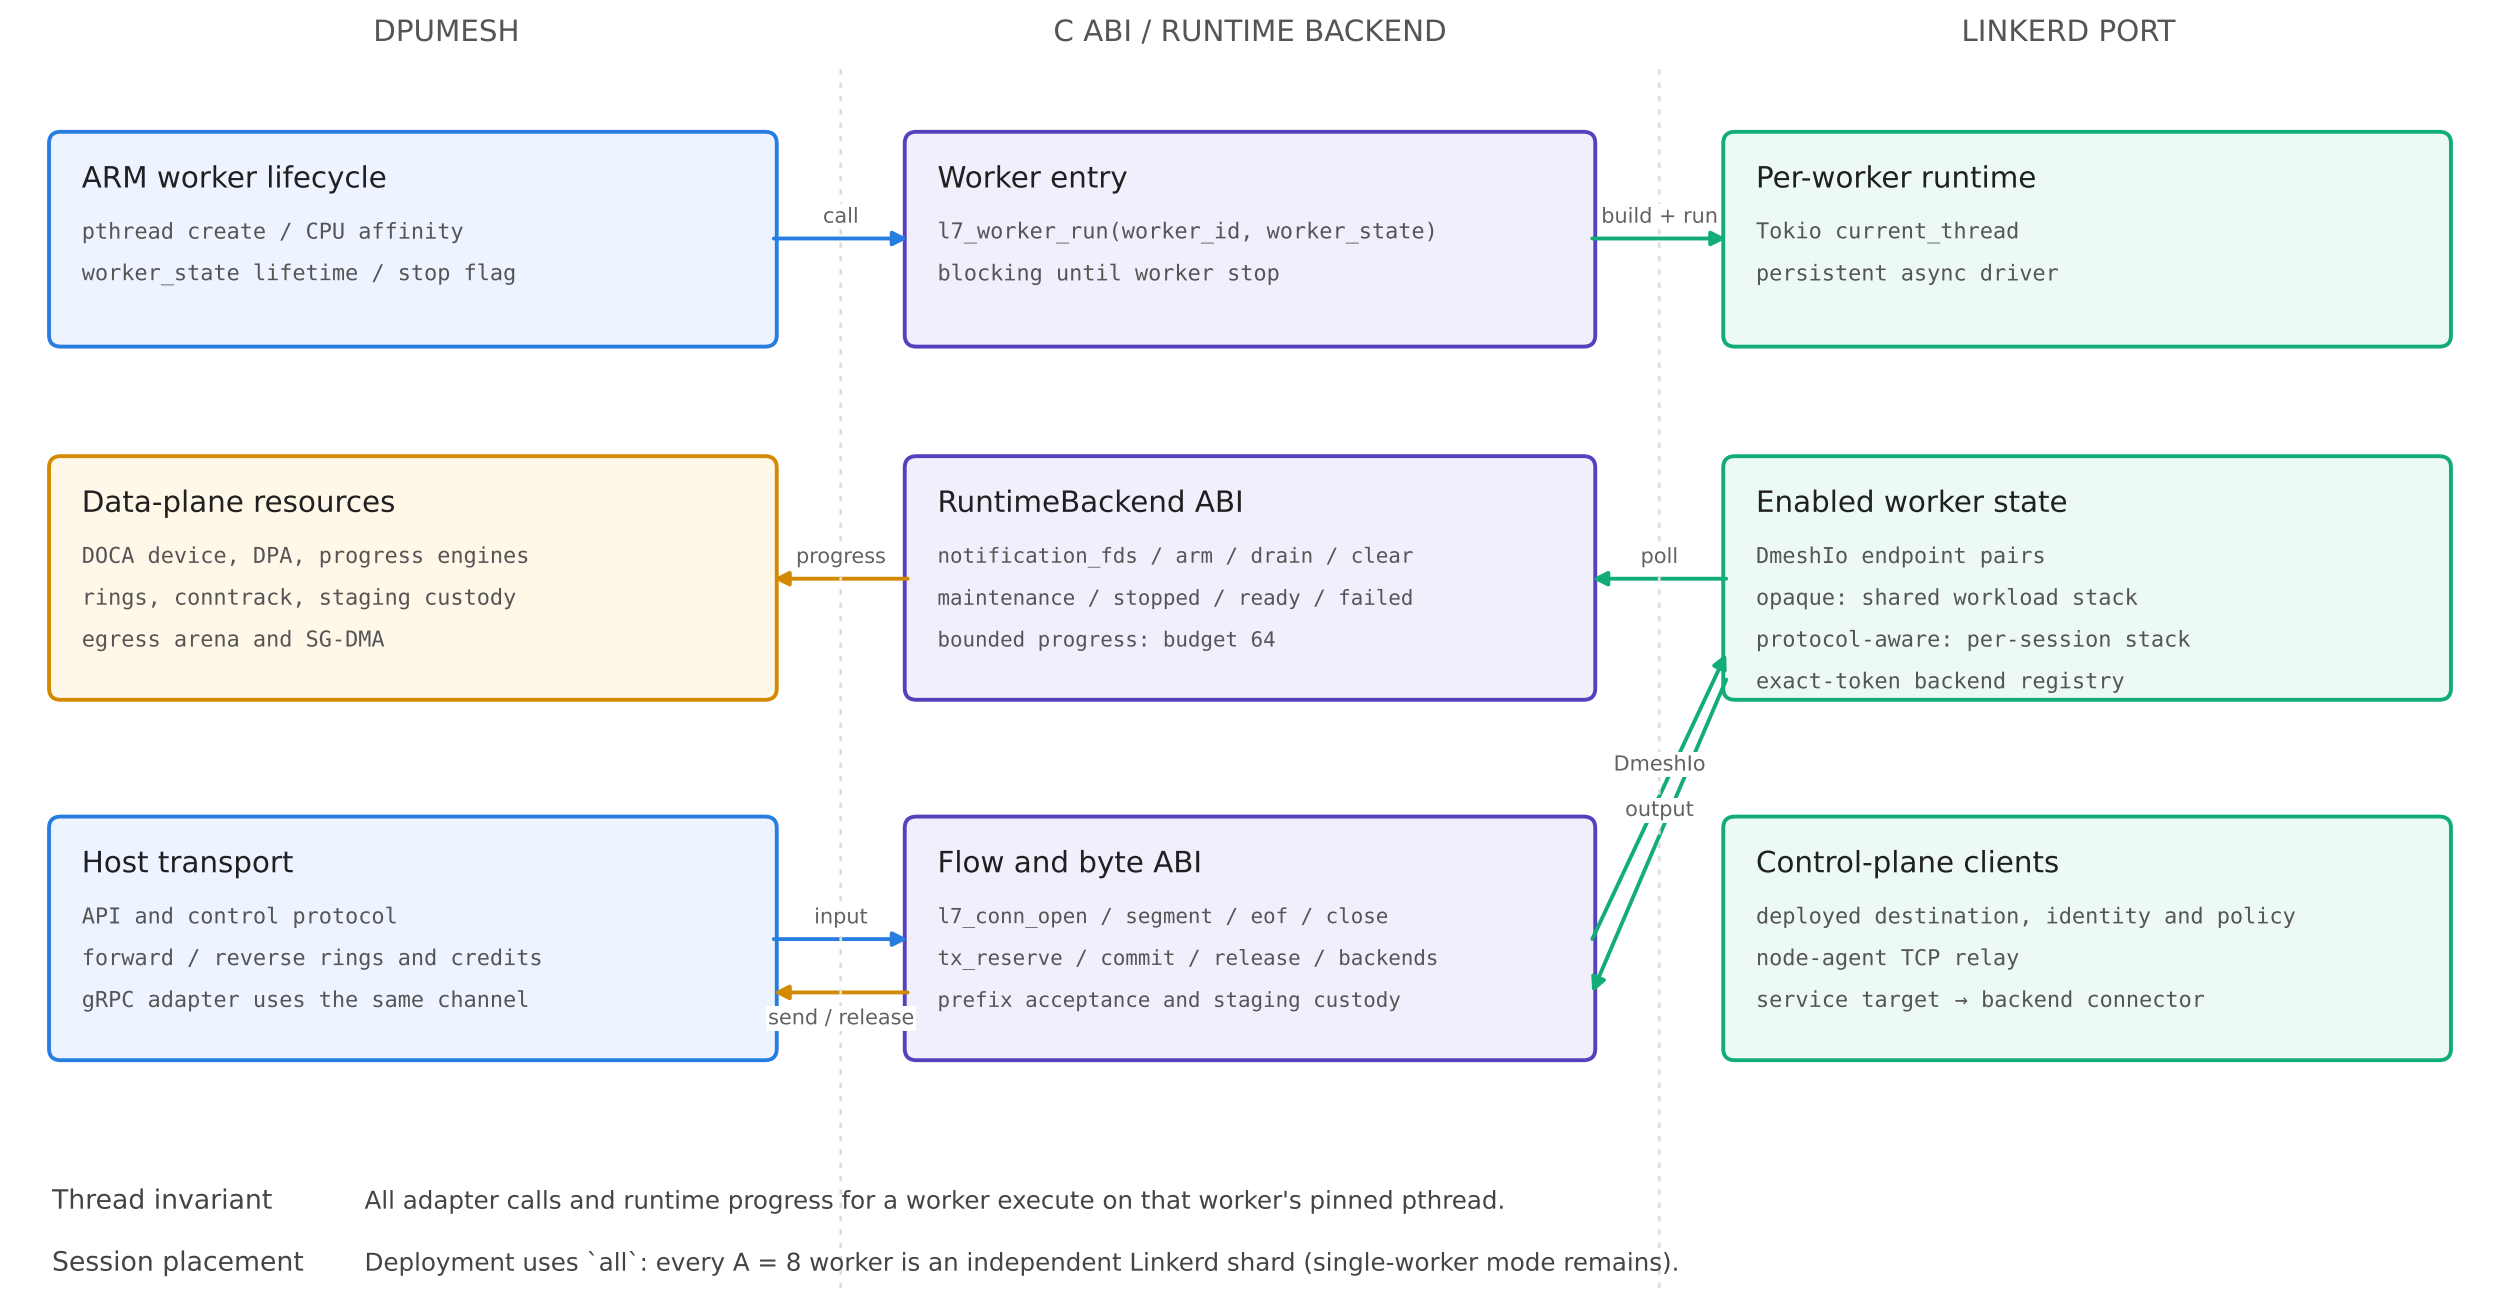

How to read this figure

RuntimeBackend	the C calls the Rust runtime drives DPUMesh through	egress arena	DPU buffers holding output until the DMA sends it
DmeshIo	byte-stream endpoint the Linkerd stack reads/writes	backend registry	per-worker map from a session to its DMesh channel
staging custody	arrival bytes DPUMesh holds until the layer releases	session	one client connection; opaque sessions may share a workload stack