


Linkerd-enabled ARM worker — persistent runtime loop

One pinned pthread hosts one Tokio current_thread runtime for the worker lifetime.

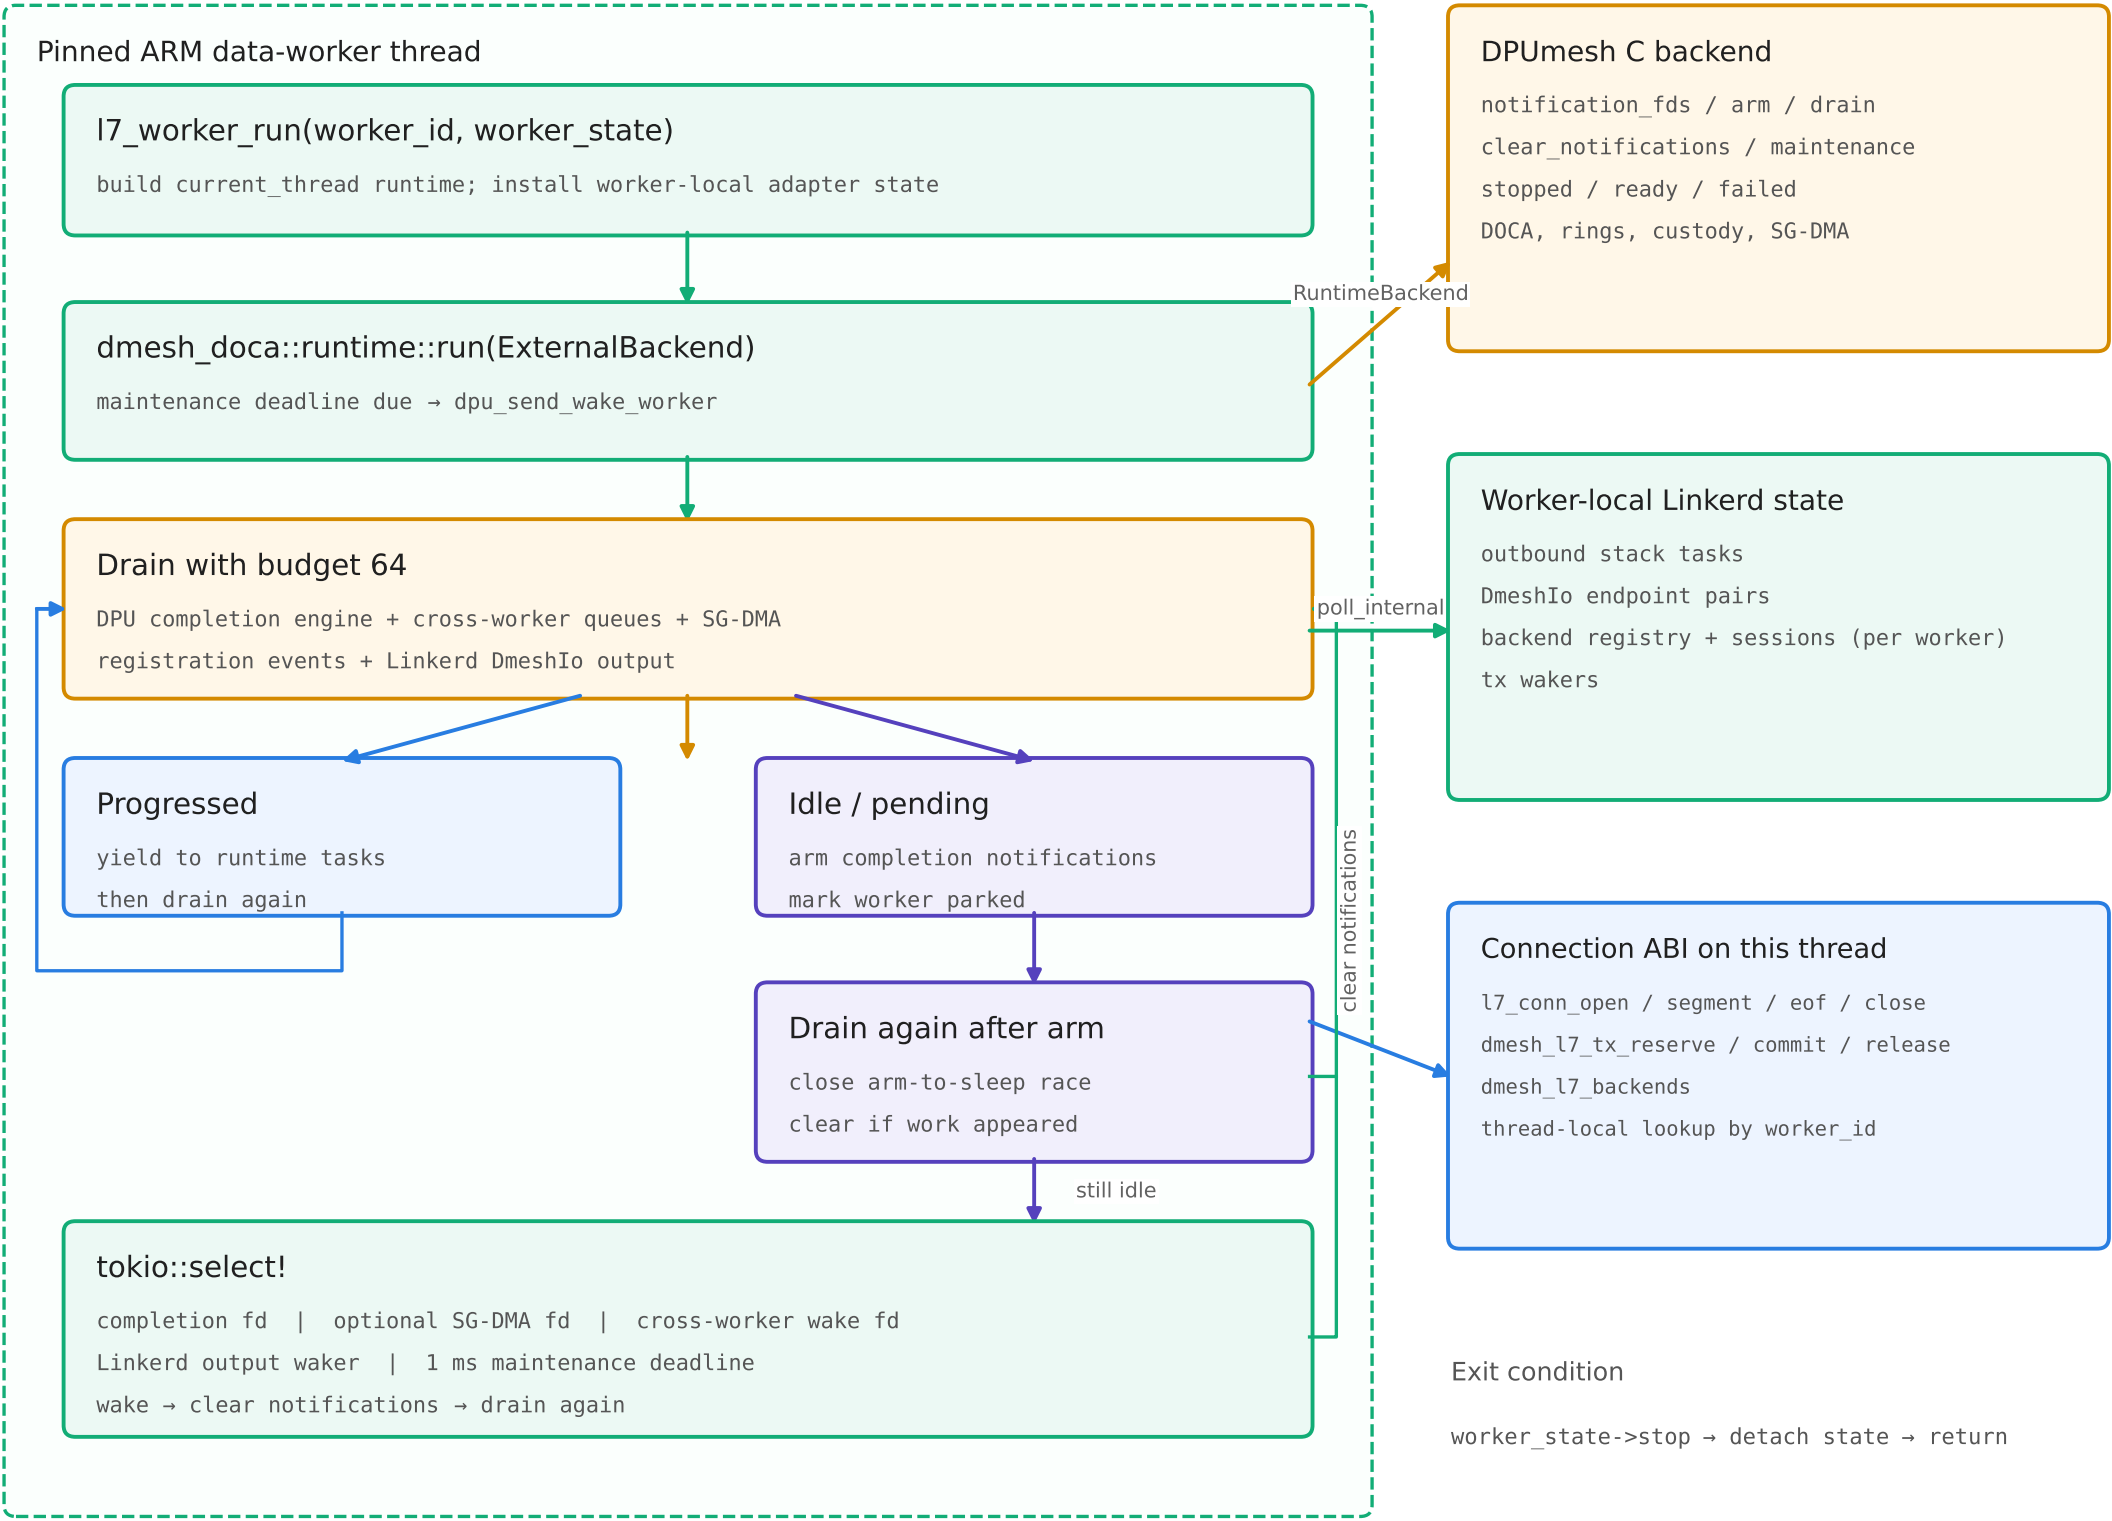

How to read this figure

drain	one bounded pass over each work source, 64 items	segment	arrival bytes lent to the L7 layer until released
arm	ask a completion engine to raise its fd next time	tx reserve / commit	write output into an egress buffer the DMA sends
DmeshIo	byte-stream endpoint the Linkerd stack reads/writes	maintenance	the 1 ms deadline for periodic worker work