


Embedded Linkerd — runtime and ownership boundary

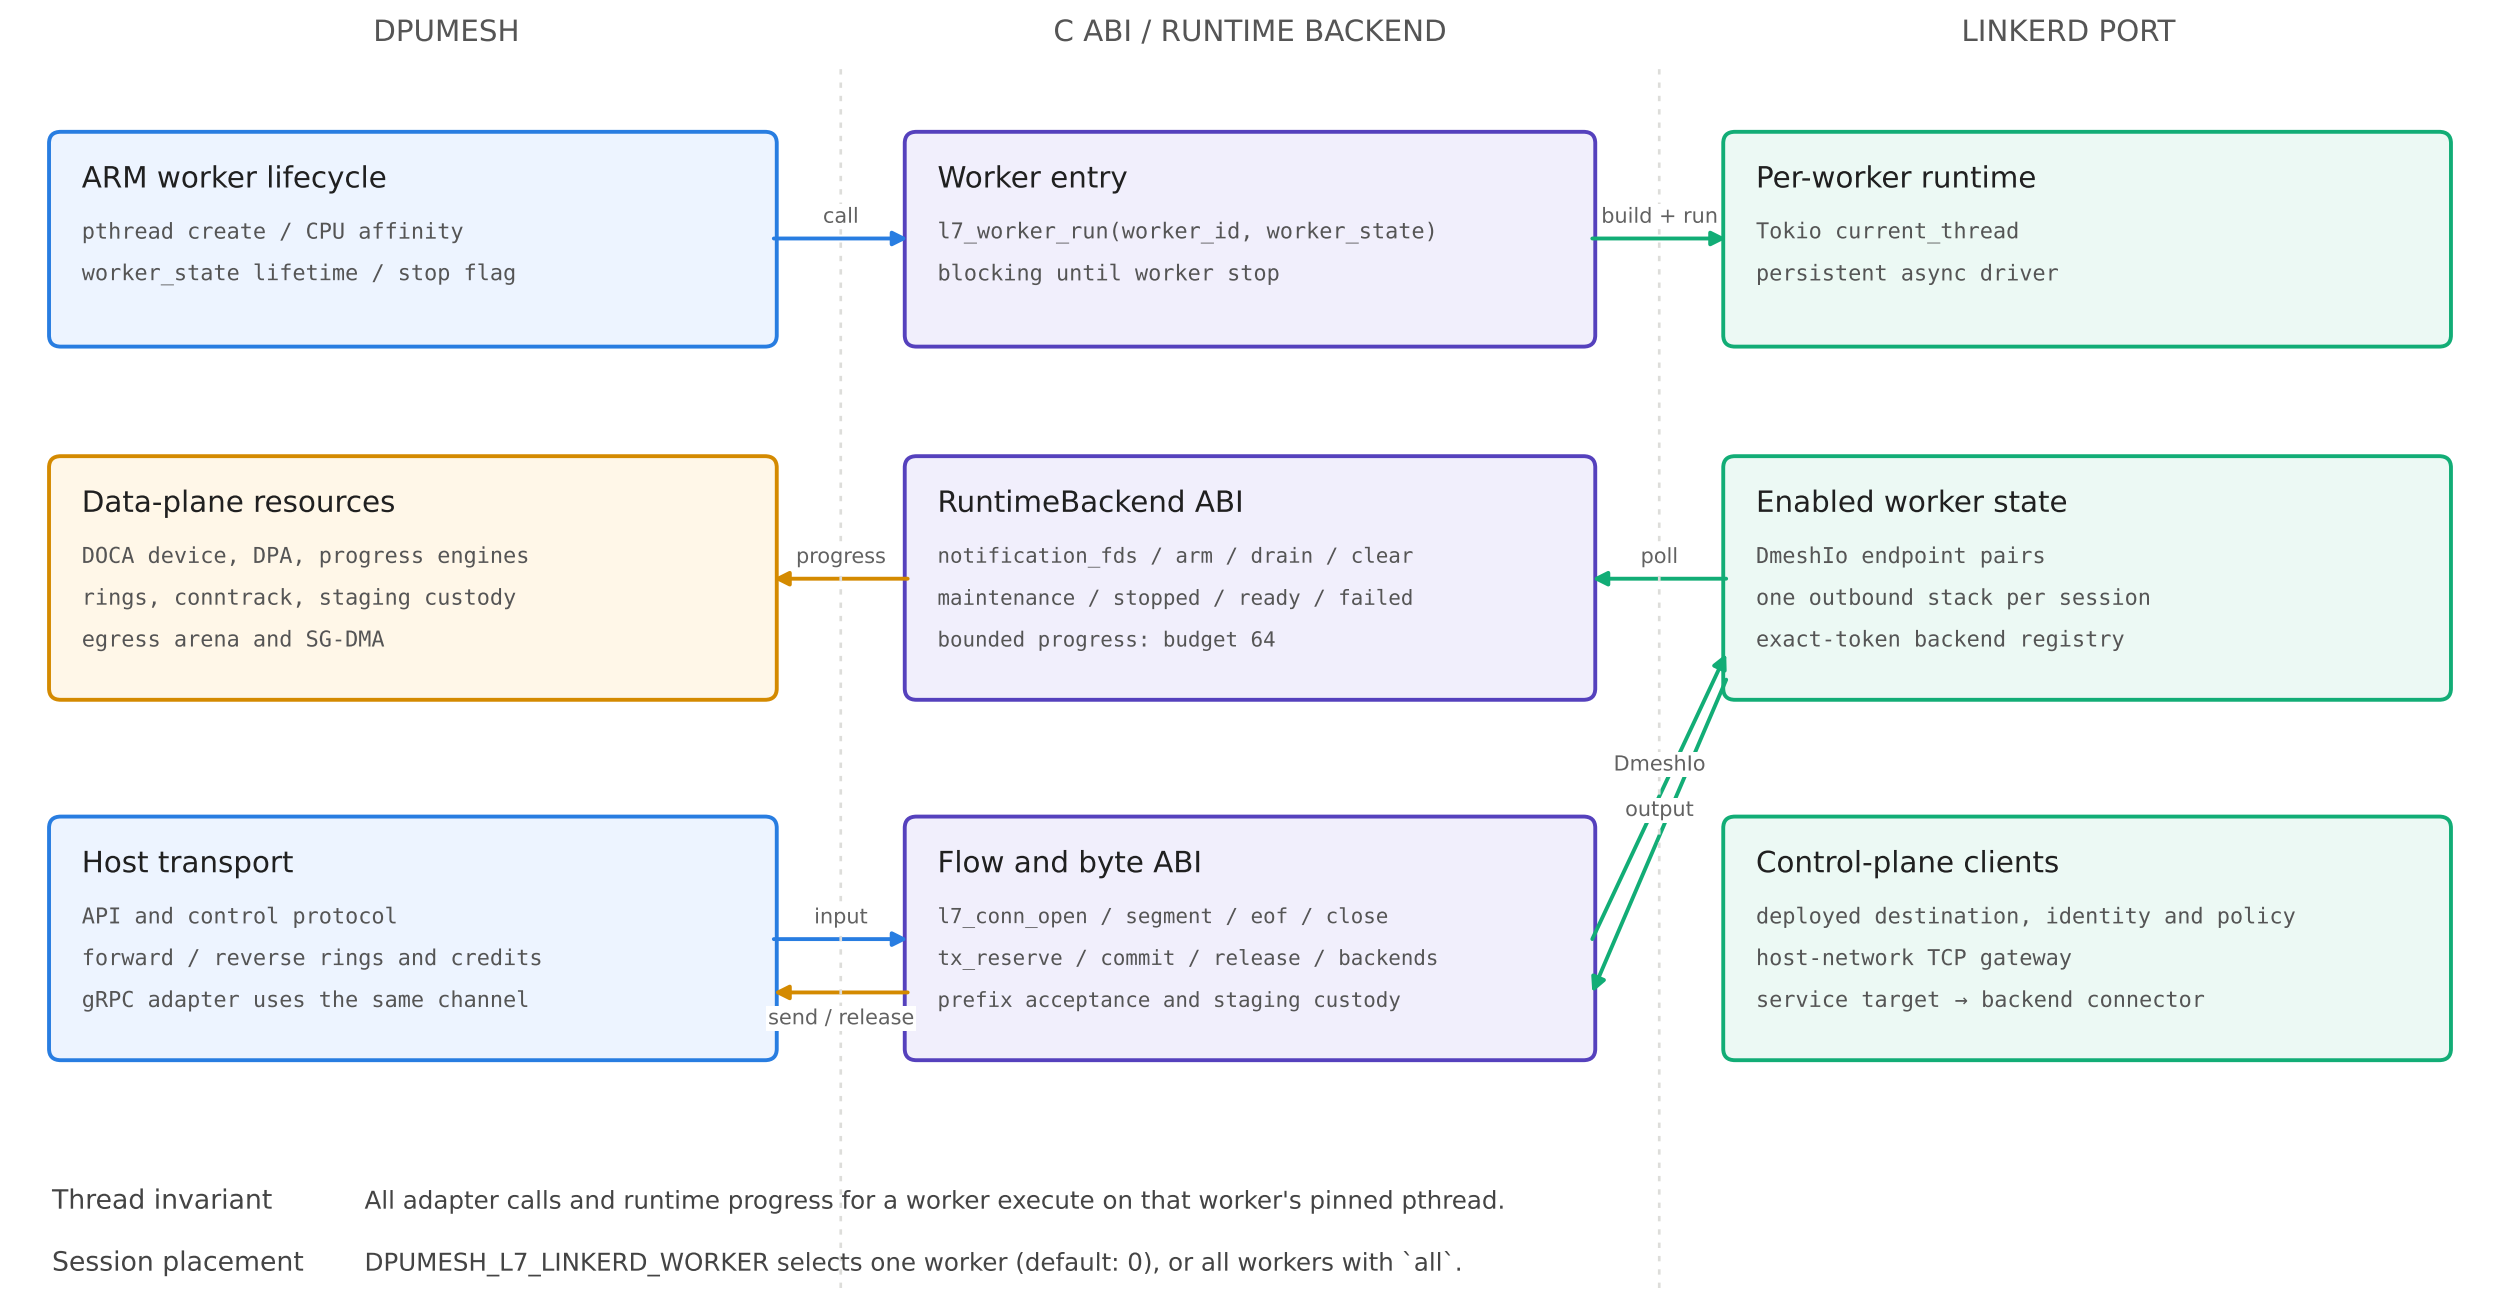

How to read this figure

RuntimeBackend
DmeshIo
staging custody

the C calls the Rust runtime drives DPUMesh through
byte-stream endpoint the Linkerd stack reads/writes
arrival bytes DPUMesh holds until the layer releases

egress arena
backend registry
session

DPU buffers holding output until the DMA sends it
per-worker map from a session to its DMesh channel
one client connection and its Linkerd outbound stack