R for the Excel User

Julie Lowndes & Allison Horst 2019-09-30

Contents

1	Welcome 7					
	1.1	Prerequisites	8			
2	Overview					
	2.1	J (9			
	2.2	Objectives (more detailed, bulletpoints?)	9			
	2.3	Resources	9			
	2.4	Overview	9			
	2.5	RStudio Orientation	2			
	2.6	R Scripts	5			
	2.7	Don't save the workspace	6			
	2.8	Deep thought: keep the raw data raw	6			
	2.9	Interludes (deep thoughts/openscapes)	6			
	2.10		6			
	2.11	Our Turn Your Turn 2	6			
			6			
3	readxl 17					
	3.1	Summary	7			
	3.2	Objectives	7			
	3.3	Resources	7			
	3.4	Lesson	8			
	3.5	Fun facts ideas:	6			
	3.6	Interludes (deep thoughts/openscapes)	6			
	3.7	Activity: Import some invertebrates!	6			
	3.8	· -	8			
4	RMarkdown 29					
	4.1	Summary (a few sentences)	9			
	4.2	Objectives (more detailed, bulletpoints?)	9			
	4.3		9			
	4.4	Lessons teaching for each objective (objectives, examples) 2	9			
	4.5	Fun facts (quirky things) - making a note of these wherever pos-				
		(- , , , , , , , , , , , , , , , , , , ,	9			

4 CONTENTS

	4.6	Interludes (deep thoughts/openscapes)			
	4.7	Our Turn Your Turn 1			
	4.8	Our Turn Your Turn 2			
	4.9	Efficiency Tips			
5	Dplyr and Pivot Tables 3				
	5.1	Summary (a few sentences)			
	5.2	Objectives (more detailed, bulletpoints?)			
	5.3	Resources			
	5.4	Lessons teaching for each objective (objectives, examples) 3			
	5.5	Fun facts (quirky things) - making a note of these wherever pos-			
		sible for interest (little "Did you know?" sections)			
	5.6	Interludes (deep thoughts/openscapes)			
	5.7	Our Turn Your Turn 1			
	5.8	Our Turn Your Turn 2			
	5.9	Efficiency Tips			
6	Dplyr and vlookups 33				
	6.1	Summary (a few sentences)			
	6.2	Objectives (more detailed, bulletpoints?)			
	6.3	Resources			
	6.4	Lessons teaching for each objective (objectives, examples) 3			
	6.5	Fun facts (quirky things) - making a note of these wherever pos-			
		sible for interest (little "Did you know?" sections)			
	6.6	Interludes (deep thoughts/openscapes)			
	6.7	Our Turn Your Turn 1			
	6.8	Our Turn Your Turn 2			
	6.9	Efficiency Tips			
7	Tidying 3				
	7.1	Better practices [needs a better name]			
	7.2	Summary (a few sentences)			
	7.3	Objectives (more detailed, bulletpoints?)			
	7.4	Resources			
	7.5	Lessons teaching for each objective (objectives, examples) 30			
	7.6	Fun facts (quirky things) - making a note of these wherever possible for interest (little "Did you know?" sections)			
	7.7	Interludes (deep thoughts/openscapes)			
	7.8	Our Turn Your Turn 2			
	7.9	Efficiency Tips			
8	Formatting and Sharing 39				
	8.1	Summary (a few sentences)			
	8.2	Objectives (more detailed, bulletpoints?)			
	8.3	Resources			
	8.4	Lessons teaching for each objective (objectives, examples) 39			

CONTENTS 5

	8.5	Fun facts (quirky things) - making a note of these wherever pos-	
		sible for interest (little "Did you know?" sections)	40
	8.6	Interludes (deep thoughts/openscapes)	40
	8.7	Our Turn Your Turn 1	40
	8.8	Our Turn Your Turn 2	40
	8.9	Efficiency Tips	40
_	a		4.4
9	Syn	thesis	41
	9.1	Summary (a few sentences)	41
	9.2	Objectives (more detailed, bulletpoints?)	41
	9.3	Resources	41
	9.4	Lessons teaching for each objective (objectives, examples)	41
	9.5	Fun facts (quirky things) - making a note of these wherever pos-	
		sible for interest (little "Did you know?" sections)	41
	9.6	Interludes (deep thoughts/openscapes)	41
	9.7	Our Turn Your Turn 1	41
	9.8	Our Turn Your Turn 2	41
	9.9	Efficiency Tips	41

6 CONTENTS

${f Welcome}$

Excel is a widely used and powerful tool for working with data. As automation, reproducibility, collaboration, and frequent reporting become increasingly expected in data analysis, a good option for Excel users is to extend their workflows with R. Integrating R into data analysis with Excel can bridge the technical gap between collaborators using either software. R enables use of existing tools built for specific tasks and overcomes some limitations that arise when working with large datasets or repeated analyses. This course is for Excel users who want to add or integrate R and RStudio into their existing data analysis toolkit. Participants will get hands-on experience working with data across R, Excel, and Google Sheets, focusing on: data import and export, basic wrangling, visualization, and reporting with RMarkdown. Throughout, we will emphasize conventions and best practices for working reproducibly and collaboratively with data, including naming conventions, documentation, organization, all while "keeping the raw data raw". Whether you are working in Excel and want to get started in R, already working in R and want tools for working more seamlessly with collaborators who use Excel, or whether you are new to data analysis entirely, this is the course for you!

If you answer yes to these questions, this course is for you!

- Are you an Excel user who wants to expand your data analysis toolset with R?
- Do you want to bridge analyses between Excel and R, whether working independently or to more easily collaborate with others who use Excel or R?
- Are you new to data analysis, and looking for a good place to get started?

1.1 Prerequisites

Before the training, please make sure you have done the following:

- 1. Download and install **up-to-date versions** of:
 - R: https://cloud.r-project.org
 - RStudio: http://www.rstudio.com/download
- 2. Install the Tidyverse
- 3. Get comfortable: if you're not in a physical workshop, be set up with two screens if possible. You will be following along in RStudio on your own computer while also watching a virtual training or following this tutorial on your own.

Overview

- 2.1 Summary (a few sentences)
- 2.2 Objectives (more detailed, bulletpoints?)

2.3 Resources

R is not only a language, it is an active community of developers, users, and educators (often these traits are in each person). This workshop and book based on many excellent materials created by other members in the R community, who share their work freely to help others learn. Using community materials is how WE learned R, and each chapter of the book will have Resources listed for further reading into the topics we discuss. And, when there is no better way to explain something (ahem Jenny Bryan), we will quote or reference that work directly.

- What They Forgot to Teach You About R Jenny Bryan & Jim Hester
- Stat545 Jenny Bryan & Stat545 TAs
- Where do Things Live in R? REX Analytics

2.4 Overview

Welcome.

This workshop you will learn hands-on how to begin to interoperate between Excel and R.

A main theme throughout is to produce analyses people can understand and build from — including Future You. Not so brittle/sensitive to minor changes.

We will learn and reinforce X main things all at the same time: coding with best practices (R/RStudio), how this relates to operations in Excel, Z. This training will teach these all together to reinforce skills and best practices, and get you comfortable with a workflow that you can use in your own projects.

2.4.1 What to expect

This is going to be a fun workshop.

The plan is to expose you to X that you can have confidence using in your work. You'll be working hands-on and doing the same things on your own computer as we do live on up on the screen. We're going to go through a lot in these two days and it's less important that you remember it all. More importantly, you'll have experience with it and confidence that you can do it. The main thing to take away is that there are good ways to work between R and Excel; we will teach you to expect that so you can find what you need and use it! A theme throughout is that tools exist and are being developed by real, and extraordinarily nice, people to meet you where you are and help you do what you need to do. If you expect and appreciate that, you will be more efficient in doing your awesome science.

You are all welcome here, please be respectful of one another. You are encouraged to help each other.

Everyone in this workshop is coming from a different place with different experiences and expectations. But everyone will learn something new here, because there is so much innovation in the data science world. Instructors and helpers learn something new every time, from each other and from your questions. If you are already familiar with some of this material, focus on how we teach, and how you might teach it to others. Use these workshop materials not only as a reference in the future but also for talking points so you can communicate the importance of these tools to your communities. A big part of this training is not only for you to learn these skills, but for you to also teach others and increase the value and practice of open data science in science as a whole.

2.4.2 What you'll learn

TODO: dev

- Motivation is to bridge and/or get out of excel
- We're not going to replicate all of your fancy things in R,
- We use Excel to look at data that we're reading into R

2.4. OVERVIEW 11

• Spreadsheets are great; blend data entry with analyses and we're going to try to help you think about them a bit more distinctively.

• Most important collaborator is future you, and future us

An important theme for this workshop is being deliberate about your analyses and setting things up in a way that will make your analytical life better downstream in the current task, and better when Future You or Future Us revisit it in the future (i.e. avoiding: what happens next? What does this name mean?)

This graphic by Hadley Wickham and Garrett Grolemund in their book R for Data Science is simple but incredibly powerful:

You may not have ever thought about analysis in such discrete steps: I certainly hadn't before seeing this. That is partly because in Excel, it can be easy to blend these steps together. We are going to keep them separate, and talk about why. The first step is Import: and implicit in this as a first step is that the data is stored elsewhere and is not manipulated directly, which **keeps the raw data raw**.

We will be focusing on:

- Import: readr, readxl to read raw data stored in CSV or Excel files directly into R
- Tidy: tidyr to (re)organize rows of data into unique values
- Transform: dplyr to "wrangle" data based on subsetting by rows or columns, sorting and joining
- Visualize: ggplot2 static plots, using grammar of graphics principles
- Communicate
 - writexl to export intermediate and final data
 - GitHub File Upload and Issues for online publishing and collaboration

2.4.3 Emphasizing collaboration

TODO: rewrite/update (from OHI book):

Collaborating efficiently has historically been really hard to do. It's only been the last 20 years or so that we've moved beyond mailing things with the postal service. Being able to email and get feedback on files through track changes was a huge step forward, but it comes with a lot of bookkeeping and reproduciblity issues (did I send that report based on analysis_final_final.xls or analysis_final_usethisone.xls?). But now, open tools make it much easier to collaborate.

Working with collaborators in mind is critical for reproducibility. And, your most important collaborator is Future You. This training will introduce best practices using open tools, so that collaboration will become second nature to you!


2.4.4 By the end of the course...

By the end of this course you'll produce this report that you can reproduce, which means... Introduce the problem we will solve. Eg: (just an idea maybe time-series is not a great idea) SMALL PROBLEM. (4 mins) Show data files, We will discuss our analysis plan (only enough to motivate!) Create a report, that looks great.

2.5 RStudio Orientation

Open RStudio for the first time.

Launch RStudio/R.

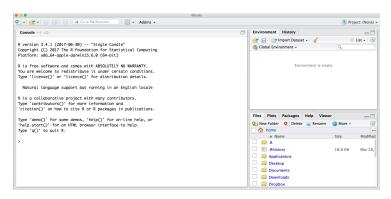


Notice the default panes:

- Console (entire left)
- Environment/History (tabbed in upper right)
- Files/Plots/Packages/Help (tabbed in lower right)

FYI: you can change the default location of the panes, among many other things: Customizing RStudio.

An important first question: where are we?

If you've have opened RStudio for the first time, you'll be in your Home directory. This is noted by the ~/ at the top of the console. You can see too that the Files pane in the lower right shows what is in the Home directory where you are. You can navigate around within that Files pane and explore, but note that you won't change where you are: even as you click through you'll still be Home: ~/.

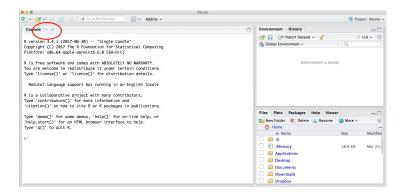

2.5.1 RStudio Projects


Create a new Project called 'r-for-excel-users'. File > New Project... > New Directory > New Project. Give your Project a name browse to a place to keep it. And then click to Create Project!

What is a Project? It is a way to organize all of the relevant things you need for an analysis in the same place. This means data, code, figures, notes, etc.

Why does this matter? Keeping everything you need for your analysis together makes it less brittle and more portable — across people, time, and computers.

Working directory = no file path/broken path issues. Notice that a folder now appears wherever you saved this project with the same name, and it contains a .Rproj file.

Now that we have our Project, here is an important question: where are we? Now we are in our Project. Everything we do will by default be saved here so we can be nice and organized.

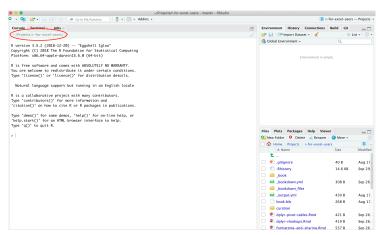

2.5.2 R Console

Watch me work in the Console.

I can do math:

52*40 365/12

TODO: refine

But like Excel, the power comes not from doing small operations by hand (like 8*22.3), it's by being able to operate on whole suites of numbers and datasets. In Excel, data are stored in the spreadsheet. In R, they are stored in dataframes, and named as variables.

R stores data in variables, and that data can be a variety of formats, like numeric and text. Let's have a look at some data in R. R has several built-in data sets that we can look at and work with.

One of these datasets is called mtcars. If I write this in the Console, it will print the data in the console.

mtcars

I can also use RStudio's Viewer to see this in a more familiar-looking format:

View(mtcars)

This opens the fourth pane of the RStudio IDE. In the Viewer I can do things like filter or sort. This does not do anything to the actual data, it just changes how you are viewing the data.

There are also functions like in Excel; I can do ?sum and look at the help pages.

Average mile per gallon. In excel there is a function called AVERAGE. Let's see

OK so working in the Console is great, but it gets messy. It's good for quick things. But looking back at what I've done and trying to build upon it would be a nightmare.

2.5.3 Deep thought: Error messages are your friends

Implicit contract with the computer / scripting language: Computer will do tedious computation for you. In return, you will be completely precise in your instructions. Typos matter. Case matters. Pay attention to how you type.

Remember that this is a language, not unsimilar to English! There are times you aren't understood – it's going to happen. There are different ways this can happen. Sometimes you'll get an error. This is like someone saying 'What?' or 'Pardon'? Error messages can also be more useful, like when they say 'I

2.6. R SCRIPTS 15

didn't understand what you said, I was expecting you to say blah'. That is a great type of error message. Error messages are your friend. Google them (copy-and-paste!) to figure out what they mean.

And also know that there are errors that can creep in more subtly, when you are giving information that is understood, but not in the way you meant. Like if I am telling a story about suspenders that my British friend hears but silently interprets in a very different way (true story). This can leave me thinking I've gotten something across that the listener (or R) might silently interpreted very differently. And as I continue telling my story you get more and more confused... Clear communication is critical when you code: write clean, well documented code and check your work as you go to minimize these circumstances!

2.6 R Scripts

Instead of working in the Console that can get messy, we can be more organized. In a script. Let's all do this together.

File > New File > R Script.

This is a blank slate for us to write our code; but there are some good practices we can start off with. Let's add a useful header to the top of it. For example, at a minimum:

```
# ------
# A descriptive title
# Summary of what this script is for
# Your name
# Contact information
# Date
# -----
```

Since we're working in or Project, this script is now nicely saved in our Project.

Other things you might include: required packages or datasets, relevant links (e.g. to raw data

Let's attach a package. Since you've already installed tidyverse

```
# Attach the tidyverse
library(tidyverse)
```

Cool looking plot with diamonds.

You can run code line by line or sourcing the script

2.7 Don't save the workspace

2.8 Deep thought: keep the raw data raw.

Discussing using Excel for variables.

Horror Stories! Economist etc.

2.9 Interludes (deep thoughts/openscapes)

Comments! Organization (spacing, subsections, vertical structure, indentation, etc.)! Well-named variables! Also, well-named operations so analyses (select(data, columnname)) instead of data[1:6,5] and excel equivalent. (Ex with strings) Not so brittle/sensitive to minor changes.

- 2.10 Our Turn Your Turn 1
- 2.11 Our Turn Your Turn 2
- 2.12 Efficiency Tips

readxl

3.1 Summary

Check this, may need to be a block quote: The readxl package makes it easy to import tabular data from Excel spreadsheets (.xls or .xlsx files) and includes several options for cleaning data during import. readxl has no external dependencies and functions on any operating system, making it an OS- and user-friendly package that simplifies getting your data from Excel into R.

3.2 Objectives

- Use readr::read_csv() to read in a comma separated value (CSV) file
- Use readxl::read_excel() to read in an Excel worksheet from a workbook
- Replace a specific string/value in a spreadsheet with with NA
- Skip n rows when importing an Excel worksheet
- Use readxl::read_excel() to read in parts of a worksheet (by cell range)
- Specify column names when importing Excel data
- Read and combine data from multiple Excel worksheets into a single df using purrr::map_df()
- Write data using readr::write_csv() or writexl::write_excel()
- Workflows with readx1: considerations, limitations, reproducibility

3.3 Resources

• https://readxl.tidyverse.org/

• readxl Workflows article (from tidyverse.org)

3.4 Lesson

3.4.1 Lesson prep: get data files into your working directory

In Session 1, we introduced how and why R Projects are great for reproducibility, because our self-contained working directory will be the **first** place R looks for files.

You downloaded four files for this workshop:

- fish_counts_curated.csv
- invert counts curated.xlsx
- kelp_counts_curated.xlsx
- substrate cover curated.xlsx

Copy and paste those files into the 'RforExcelUsers' folder on your computer. Notice that now these files are in your working directory when you go back to that Project in RStudio (check the 'Files' tab). That means they're going to be in the first place R will look when you ask it to find a file to read in.

3.4.2 Create a new .R script, attach the tidyverse, readxl and writexl packages

In your RforExcelUsers project in RStudio, open a new .R script and add a useful header to the top of it. For example, at a minimum:

```
# ------
# A descriptive title
# Summary of what this script is for
# Your name
# Contact information
# ------
# Other things you might include: required packages or datasets, relevant links (e.g.
```

In this lesson, we'll read in a CSV file with the readr::read_csv() function, so we need to have the readr package attached. Since it's part of the tidyverse, we'll go ahead and attach the tidyverse package below our script header using library(package_name). It's a good idea to attach all necessary packages near the top of a script, so we'll also attach the readxl packages here.

3.4. LESSON 19

```
# Attach the tidyverse, readxl and writexl packages:
library(tidyverse)
library(readxl)
library(writexl)
```

Now, all of the packages and functions within the tidyverse and readxl, including readr::read_csv() and readxl::read_excel(), are available for use.

3.4.3 Use readr::read_csv() to read in data from a CSV file

There are many types of files containing data that you might want to work with in R. A common one is a comma separated value (CSV) file, which contains values with each column entry separated by a comma delimiter. CSVs can be opened, viewed, and worked with in Excel just like an .xls or .xlsx file - but let's learn how to get data directly from a CSV into R where we can work with it more reproducibly.

The CSV we'll read in here is called "fish_counts_curated.csv", and contains observations for "the abundance and size of fish species as part of SBCLTER's kelp forest monitoring program to track long-term patterns in species abundance and diversity" from the Santa Barbara Channel Long Term Ecological Research program.

Source: Reed D. 2018. SBC LTER: Reef: Kelp Forest Community Dynamics: Fish abundance. Environmental Data Initiative. https://doi.org/10.6073/pasta/dbd1d5f0b225d903371ce89b09ee7379. Dataset accessed 9/26/2019.

Read in the "fish_counts_curated.csv" file read_csv("file_name.csv"), and store it in R as an object called fish counts:

```
fish_counts <- read_csv("fish_counts_curated.csv")</pre>
```


Notice that the name of the stored object (here, fish_counts) will show up in our Environment tab in RStudio.

Click on the object in the Environment, and R will automatically run the View() function for you to pull up your data in a separate viewing tab. Now we can look at it in the spreadsheet format we're used to.

Here are a few other functions for quickly exploring imported data:

- summary(): summary of class, dimensions, NA values, etc.
- names(): variable names (column headers)
- ls(): list all objects in environment
- head(): Show the first x rows (default is 6 lines)
- tail(): Show the last x rows (default is 6 lines)

Now let's make a simple plot of some fish counts with ggplot2.

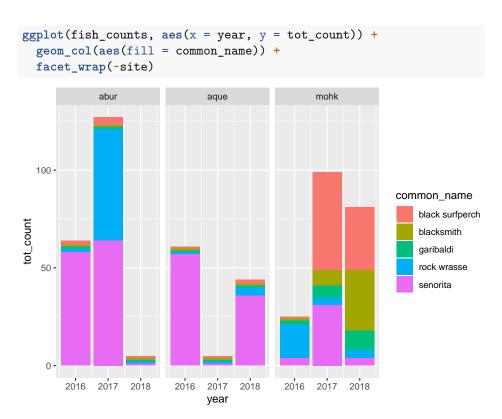

Now that we have our fish counts data ready to work with in R, let's get the substrate cover and kelp data (both .xlsx files). In the following sections, we'll learn that we can use readxl::read_excel() to read in Excel files directly.

3.4.4 Use readxl::read_excel() to read in a single Excel worksheet

First, take a look at $substrate_cover_curated.xlsx$ in Excel, which contains a single worksheet with substrate type and percent cover observations at different sampling locations in the Santa Barbara Channel.

A few things to notice:

- The file contains a single worksheet
- There are multiple rows containing text information up top
- Where observations were not recorded, there exists '-9999'

Let's go ahead and read in the data. If the file is in our working directory, we can read in a single worksheet .xlsx file using readxl::read_excel("file_name.xlsx").

Note: readxl::read_excel() works for both .xlsx and .xls types.

Like this:

3.4. LESSON 21

```
substrate_cover <- read_excel("substrate_cover_curated.xlsx")</pre>
```

Tada? Not quite.

Click on the object name (*substrate_cover*) in the Environment to view the data in a new tab. A few things aren't ideal:

substrate cover

```
## # A tibble: 23,942 x 9
                                      ...3
                                              ...4
                                                    ...5
                                                                         ...8
##
      `Substrate cover data~ ...2
                                                            ...6
                                                                  . . . 7
##
                               <chr> <chr>
                                             <chr> <chr>
                                                            <chr> <chr> <chr> <chr>
##
    1 Source: https://porta~ <NA>
                                      <NA>
                                              < NA >
                                                    <NA>
                                                            <NA>
                                                                  <NA>
                                                                         <NA>
                                                                               <NA>
##
    2 Accessed: 9/28/2019
                               <NA>
                                      <NA>
                                              <NA>
                                                    <NA>
                                                            <NA>
                                                                  <NA>
                                                                         <NA>
                                                                               <NA>
##
    3 <NA>
                               <NA>
                                                            <NA>
                                                                  <NA>
                                      <NA>
                                              <NA>
                                                    <NA>
                                                                         <NA>
                                                                               <NA>
                                                                         subs~
##
    4 year
                               month date
                                             site
                                                    trans~ quad
                                                                  side
                                                                               perc~
##
    5 -9999
                               -9999 -9999
                                                            20
                                                                               -9999
                                             carp
                                                    1
                                                                  i
                                                                         b
##
    6 2000
                               9
                                      -9999
                                             carp
                                                    1
                                                            20
                                                                         b
                                                                               -9999
                                                                  0
##
    7 2000
                               9
                                      9/8/00 carp
                                                    1
                                                            20
                                                                  i
                                                                         b
                                                                               100
   8 2000
                               9
                                      9/8/00 carp
                                                            20
                                                                               100
                                                                  0
## 9 2000
                               9
                                      9/8/00 carp
                                                                               100
                                                            40
                                                                         b
                                                    1
                                                                  i
## 10 2000
                               9
                                      9/8/00 carp
                                                                               100
                                                            40
## # ... with 23,932 more rows
```

- The top row of text has automatically become the (messy) column headers
- There are multiple descriptive rows before we actually get to the data
- There are -9999s that we want R to understand NA instead

We can deal with those issues by adding arguments within read_excel(). Include argument skip = n to skip the first 'n' rows when importing data, and na = "this" to replace "this" with NA when importing:

substrate_cover <- read_excel("curation/substrate_cover_curated.xlsx, skip = 4, na = "-9999")</pre>

substrate_cover

```
## # A tibble: 23,938 x 9
##
      year month date
                               transect quad side
                                                     substrate_type
                        site
      <chr> <chr> <chr> <chr> <chr> <chr>
                                        <chr> <chr>
                                                     <chr>>
   1 <NA>
           <NA>
                  <NA>
                         carp
                               1
                                        20
                                               i
                                                     b
    2 2000
           9
                  <NA>
                         carp
                               1
                                        20
                                               0
                                                     b
                  9/8/~ carp
##
    3 2000 9
                                        20
                               1
                                               i
                                                     b
    4 2000
##
            9
                  9/8/~ carp
                               1
                                        20
                                               0
                                                     b
##
    5 2000 9
                  9/8/~ carp
                                        40
                               1
                                               i
                                                     b
    6 2000 9
                  9/8/~ carp
                                        40
                                                     b
                               1
                                               0
    7 2000 9
                  9/8/~ carp
                               2
                                        20
                                               i
                                                     b
    8 2000 9
                  9/8/~ carp
                              2
                                        20
                                                     b
                                               0
   9 2000
           9
                  9/8/~ carp
                              2
                                        40
                                               i
                                                     b
                  9/8/~ carp 2
## 10 2000 9
                                        40
                                               0
                                                     b
```

... with 23,928 more rows, and 1 more variable: percent_cover <chr>

Check out *substrate_cover*, and see that the first row *after* the 4 skipped are the column names, and all -9999s have been updated to NA. Hooray!

3.4.5 Use readxl::read_excel() to read in only part of an Excel worksheet

We always advocate for leaving the raw data raw, and writing a complete script containing all steps of data wrangling & transformation. But in *some* situations (be careful), you may want to specify a range of cells to read in from an Excel worksheet.

You can specify a range of cells to read in using the range = argument in read_excel(). For example, if I want to read in the rectangle from D12:I15 in substrate_cover_curated.xlsx - only observations for Carpenteria Beach (Transect 2) in September 2000 - I can use:

```
carp_cover_2000 <- readxl::read_excel("substrate_cover_curated.xlsx", range = "D12:I15")</pre>
```

But yuck. Look at *carp_cover_2000* and you'll notice that the first row *of that range* is automatically made the column headers. To keep all rows within a range and **add your own column names**, add a col_names = argument:

```
carp_cover_2000 <- readxl::read_excel("substrate_cover_curated.xlsx", range = "D12:I15
carp_cover_2000</pre>
```

```
## # A tibble: 4 x 6
     site_name transect quad plot_side type coverage
                                          <chr> <chr>
##
     <chr>>
               <chr>
                         <chr> <chr>
                         20
                                                 90
## 1 carp
               2
                                i
                                          b
## 2 carp
               2
                         20
                                O
                                          b
                                                 80
## 3 carp
                2
                         40
                                                 80
                                i
                                          b
## 4 carp
                         40
```

So far we've read in a single CSV file using readr::read_csv(), and an Excel file containing a single worksheet with readxl::read_excel(). Now let's read in data from an Excel workbook with multiple worksheets.

3.4.6 Use readxl::read_excel() to read in selected worksheets from a workbook

Now, we'll read in the kelp fronds data from file $kelp_counts_curated.xlsx$. If you open the Excel workbook, you'll see that it contains multiple worksheets with giant kelp observations in the Santa Barbara Channel during July 2016, 2017, and 2018, with data collected at each site in a separate worksheet.

3.4. LESSON 23

To read in a single Excel worksheet from a workbook we'll again use readxl::read_excel("file_name.xlsx"), but we'll need to let R know which worksheet to get.

Let's read in the kelp data just like we did above, as an object called *kelp_counts*.

```
kelp_counts <- readxl::read_excel("kelp_counts_curated.xlsx")</pre>
```

You might be thinking, "Hooray, I got all of my Excel workbook data!" But remember to always look at your data - you will see that actually only the first worksheet was read in. The default in readxl::read_excel() is to read in the first worksheet in a multi-sheet Excel workbook.

To check the worksheet names in an Excel workbook, use readxl::excel sheets():

```
readxl::excel_sheets("kelp_counts_curated.xlsx")
```

If we want to read in data from a worksheet other than the first one in an Excel workbook, we can specify the correct worksheet by name or position by adding the sheet argument.

Let's read in data from the worksheet named golb (Goleta Beach) in the kelp_counts_curated.xlsx workbook:

```
kelp_golb <- readxl::read_excel("kelp_counts_curated.xlsx", sheet = "golb")</pre>
```

Note that you can also specify a worksheet by position: since golb is the $6^{\rm th}$ worksheet in the workbook, we could also use the following:

```
kelp_golb <- readxl::read_excel("kelp_counts_curated.xlsx", sheet = 6)</pre>
```

kelp_golb

```
## # A tibble: 3 x 5
## year month site common_name tot_fronds
## <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr> <chr> follows
## 1 2016 7 golb giant kelp 2557
## 2 2017 7 golb giant kelp 1575
## 3 2018 7 golb giant kelp 1629
```

3.4.7 Read in and combine data from multiple worksheets into a data frame simultaneously with purrr::map_df()

So far, we've read in entire Excel worksheets and pieces of a worksheet. What if we have a workbook (like $kelp_counts_curated.xlsx$) that contains worksheets that contain observations for the same variables, in the same organization? Then we may want to read in data from all worksheets, and combine them into a single data frame.

We'll use purrr::map_df() to loop through all the worksheets in a workbook, reading them in & putting them together into a single df in the process.

The steps we'll go through in the code below are:

- Set a pathway so that R knows where to look for an Excel workbook
- Get the names of all worksheets in that workbook with excel_sheets()
- Set names of a vector with set_names()
- Read in all worksheets, and put them together into a single data frame with purrr::map_df()

QUESTION: Have they learned the pipe operator at this point?

Expect the question: Why do I need to use read_excel() instead of just giving it the file path (as below)?

```
kelp_path <- "kelp_counts_curated.xlsx"

kelp_all_sites <- kelp_path %>%
    excel_sheets() %>%
    set_names() %>%
    purrr::map_df(read_excel, kelp_path)
```

Check out $kelp_all_sites$, and notice that now the data from all 11 sites is now collected into a single data frame:


```
kelp_all_sites
```

```
## # A tibble: 32 x 5
##
     year month site common_name tot_fronds
                                       <dbl>
##
     <chr> <chr> <chr> <chr>
  1 2016 7
##
                 abur giant kelp
                                         307
## 2 2017 7
                 abur giant kelp
                                         604
  3 2018 7
##
                 abur giant kelp
                                        3532
##
  4 2016 7
                 ahnd giant kelp
                                        2572
## 5 2017 7
                 ahnd giant kelp
                                          16
                 ahnd giant kelp
##
   6 2018 7
                                          16
##
   7 2016 7
                 aque giant kelp
                                       11152
## 8 2017 7
                 aque giant kelp
                                        9194
## 9 2018 7
                 aque giant kelp
                                        7754
## 10 2016 7
                                        6706
                 bull giant kelp
## # ... with 22 more rows
```

Awesome! Let's make a graph with ggplot2:

```
ggplot(kelp_all_sites, aes(x = site, y = tot_fronds)) +
  geom_col(aes(fill = year), position = "dodge") +
  scale_fill_manual(values = c("purple","orange","gray30"))
```

3.4. LESSON 25

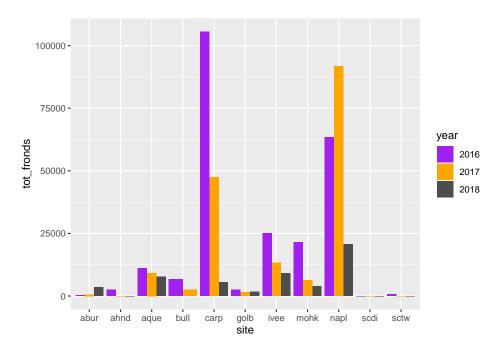

3.4.8 Save data frames as .csv or .xlsx with readr::write_csv() or writexl::write_xlsx()

There are a number of reasons you might want to save (/export) data in a data frame as a .csv or Excel worksheet, including:

- To cache raw data within your project
- To store copies of intermediate data frames
- To convert your data back to a format that your coworkers/clients/colleagues will be able to use it more easily

Use readr::write_csv(object, "file_name.csv") to write a data frame to a CSV, or writexl::write_xlsx(object, "file_name.xlsx") to similarly export as a .xlsx (or .xls) worksheet.

In the previous step, we combined all of our kelp frond observations into a single data frame. Wouldn't it make sense to store a copy?

As a CSV:

```
readr::write_csv(kelp_all_sites, "kelp_all_sites.csv")
```

A cool thing about readr::read_csv() is that it just quietly works without wrecking anything else you do in a sequence, so it's great to add at the end of a piped sequence.

For example, if I want to read in the 'ivee' worksheet from kelp_counts_curated.xlsx, select only columns 'year' and 'tot_fronds', then write that new subset to a .csv file, I can pipe all the way through:

```
kelp_ivee <- readxl::read_excel("kelp_counts_curated.xlsx", sheet = "ivee") %>%
    select(year, tot_fronds) %>%
    write_csv("kelp_ivee.csv")
```

Now I've created *kelp_ivee.csv*, but the object *kelp_ivee* also exists for me to use in R.

If needed, I can also export a data frame as an Excel (.xlsx) worksheet:

```
writexl::write_xlsx(kelp_all_sites, "kelp_all_sites.xlsx")
```

3.5 Fun facts ideas:

- Did you know that Clippy shows up to help you in the documentation for ?writexl::write xlsx()?
- The name of the purr package? Why map?

3.6 Interludes (deep thoughts/openscapes)


- Workflow/reproducibility/readxl workflows article
- Respecting the tools people are working with already (e.g. don't make your Excel using co-workers hate you)

3.7 Activity: Import some invertebrates!

There's one dataset we haven't imported or explored yet: invertebrate counts for 5 popular invertebrates (California cone snail, California spiny lobster, orange cup coral, purple urchin and rock scallops) at 11 sites in the Santa Barbara Channel. Take a look at the <code>invert_counts_curated.xlsx</code> data by opening it in Excel

- Read in the invert_counts_curated.xlsx worksheet as object 'inverts_july',
 only retaining site, common_name, and 2016 and setting the existing
 first row in the worksheet as to column headers upon import
- Explore the imported data frame using View, names, head, tail, etc.
- Write 'inverts_july' to a CSV file in your working directory called "inverts_july.csv"
- Create a basic graph of invert counts in 2016 (y-axis) by site (x-axis), with each species indicated by a different fill color

Note: If your column name is a number (not great) you'll probably want to rename it...but in the meantime, to call it as a variable make sure you put single or double quotes around it (e.g. '2016' or "2016") so that R recognizes it's a variable and not a value

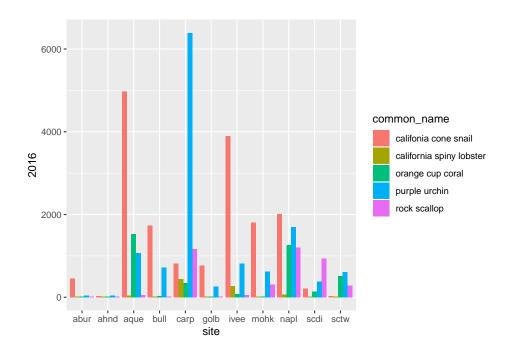

3.8 Efficiency Tips

- Undo shortcut: Command + Z
- Redo shortcut: Command + Shift + Z

RMarkdown

- 4.1 Summary (a few sentences)
- 4.2 Objectives (more detailed, bulletpoints?)
- 4.3 Resources
- 4.4 Lessons teaching for each objective..... (objectives, examples)
- 4.5 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 4.6 Interludes (deep thoughts/openscapes)
- 4.7 Our Turn Your Turn 1
- 4.8 Our Turn Your Turn 2
- 4.9 Efficiency Tips

Dplyr and Pivot Tables

- 5.1 Summary (a few sentences)
- 5.2 Objectives (more detailed, bulletpoints?)
- 5.3 Resources
- 5.4 Lessons teaching for each objective..... (objectives, examples)
- 5.5 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 5.6 Interludes (deep thoughts/openscapes)
- 5.7 Our Turn Your Turn 1
- 5.8 Our Turn Your Turn 2
- 5.9 Efficiency Tips

Dplyr and vlookups

- 6.1 Summary (a few sentences)
- 6.2 Objectives (more detailed, bulletpoints?)
- 6.3 Resources
- 6.4 Lessons teaching for each objective..... (objectives, examples)
- 6.5 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 6.6 Interludes (deep thoughts/openscapes)
- 6.7 Our Turn Your Turn 1
- 6.8 Our Turn Your Turn 2
- 6.9 Efficiency Tips

Tidying

7.1 Better practices [needs a better name]

How to be a nimble useR Modern useRs are nimble internet useRs something clever about cleaning I am the worst at naming things

7.2 Summary (a few sentences)

R ecosystem evolves and improves due to contributed work by the community, and this is a good thing. Being a nimble useR means being able to navigate/keep tabs on this ecosystem and find what you need. It also means working reproducibly, so you can re-run and update things more easily. Here we will teach you how to expect things and help yourself. Pay attention to urls.

7.3 Objectives (more detailed, bulletpoints?)

- expect there is a better way, how and where to look (20 mins)
 - CRAN
 - Twitter #rstats
 - -r
OpenSci
 - RStudio
 - Example: how to Google.
- hands-on with janitor (30+ mins)
 - discovery and quality assurance
 - installing from GitHub
 - big payoff for little effort

- hands-on with another excel-useful example: skimr?
- reproducibility (20 mins)
 - it's important, scripted

7.4 Resources

• Wilson et al. 2014 "Good enough practices"

7.5 Lessons teaching for each objective..... (objectives, examples)

7.5.1 Expect there's a better way chat

• give time for them to google?

7.5.2 Janitor

janitor & other things that will make your life easier with limited effort Janitor: up till now the column names have been fine. Until now.

7.5.2.1 Our turn your turn

Walk through and example and leave our code up, and have you do it but clean another dataset. Work with a neighbor.

7.5.3 Example: How to Google

Pay attention to URLs, build github/rmarkdown savviness (ex: raw.githubusercontent.com)

- I read this blog: https://blog.revolutionanalytics.com/2018/08/how-to-use-r-with-excel.html
- I've never heard of click on openxlsx, what is it
- Takes me here https://www.rdocumentation.org/packages/openxlsx/versions/4.1.0.1, but I want more info. How recently was it worked on? Does it interface with tidyverse? Click on "news"
- Takes me here. https://raw.githubusercontent.com/awalker89/openxlsx/master/NEWS . Not useful. But from this URL, I see the username so I can edit this url to be https://github.com/awalker89/openxlsx/

- 1st thing: most recent commit was a year ago. Can poke around more, are there issues open, are they taken care of? Etc. I will probably not pursue using this right now. But good to have learned about it.
- 7.6 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 7.7 Interludes (deep thoughts/openscapes)
- 7.8 Our Turn Your Turn 2
- 7.9 Efficiency Tips
 - browser efficiency tips
 - Rmd/github anchors for urls
 - press command to open a new tab

Reproducibility is important (this might be new to some people) Example: run everything start to finish and then closing it all and trying to do again In excel Vs R If your computer shuts off are you nervous to close it? Recreate it "What they didn't forget to teach you about R" WTDF. uncool

Formatting and Sharing

- 8.1 Summary (a few sentences)
- 8.2 Objectives (more detailed, bulletpoints?)
- 8.3 Resources
- 8.4 Lessons teaching for each objective..... (objectives, examples)
 - 1. Create a GitHub account: https://github.com Note! Shorter names that kind of identify you are better, and use your work email!

- 8.5 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 8.6 Interludes (deep thoughts/openscapes)
- 8.7 Our Turn Your Turn 1
- 8.8 Our Turn Your Turn 2
- 8.9 Efficiency Tips

Synthesis

- 9.1 Summary (a few sentences)
- 9.2 Objectives (more detailed, bulletpoints?)
- 9.3 Resources
- 9.4 Lessons teaching for each objective..... (objectives, examples)
- 9.5 Fun facts (quirky things) making a note of these wherever possible for interest (little "Did you know?" sections)
- 9.6 Interludes (deep thoughts/openscapes)
- 9.7 Our Turn Your Turn 1
- 9.8 Our Turn Your Turn 2
- 9.9 Efficiency Tips