

Access Control Verification in Software Systems

Bachelor's Thesis of

Julian Hinrichs

at the Department of Informatics
Institute for Program Structures and Data Organization (IPD)

Reviewer: Prof. Dr. Ralf H. Reussner
Second reviewer: Prof. Jun.-Prof. Dr.-Ing. Anne Koziolk
Advisor: M.Sc. Stephan Seifermann

14. May 2018 – 13. September 2018

Karlsruher Institut für Technologie
Fakultät für Informatik
Postfach 6980
76128 Karlsruhe

I declare that I have developed and written the enclosed thesis completely by myself, and have not used sources or means without declaration in the text.

Karlsruhe, October 4, 2018

.....
(Julian Hinrichs)

Abstract

There approaches that are aiming to ensure compliance on an architectural level. This is accomplished by conducting a data-based privacy analysis. Most commonly these approaches uses case studies for an evaluation.

In this thesis, we introduced a method to create case studies. The created case studies may be used to evaluate data-based privacy analysis. We also provided evaluation criteria to verify if the created case study is usable. Further, we applied our method on a realistic system and evaluated the resulting case study. In the end, we verified that for the excerpt we were investigating the method is applicable. Also the created case study was evaluated. The findings were that the case study doe snot cover all the investigated information flow classes. At last, we also evaluated the used modeling language.

Zusammenfassung

Die Arbeit stellt eine Methode vor, die in der datenbasierte Datenschutzanalyse verwendet werden kann. Dazu wurde ein bekanntes System benutzt, auf das die Methode angewendet wurde. Als Ergebnis der Anwendung der Methode wurde eine Fallstudie erstellt. Zum Schluss haben wir die Methode, die Fallstudie sowie die verwendete Modellierungssprachen evaluiert. Die Ergebnisse der Evaluation sind die Folgenden: die Anwendbarkeit für ein spezielles System ist gegeben. Die erstellte Fallstudie deckt nicht alle überprüften Informationsflussklassen ab. Die verwendete Modellierungssprache ist bis auf eine kleine Einschränkung nutzbar. Zu guter letzt, die Ergebnisse der Arbeit können für datenbasierte Datenschutzanalysen zur Evaluation verwendet werden, um eine oder mehrere Fallstudien zu erstellen und deren Qualität zu überprüfen.

Contents

Abstract	i
Zusammenfassung	iii
1. Introduction	1
1.1. Motivation	1
1.2. Contributions	1
1.3. Outline of the thesis	2
2. Foundations	3
2.1. Terminology	3
2.1.1. security relevant data	3
2.1.2. Data flow	3
2.2. Palladio Component Model	4
2.2.1. Component based systems	4
2.3. Data Centric PCM	5
2.3.1. Concept	5
2.3.2. Meta model extension for data centric PCM	6
3. Related work	7
4. Procedure	9
4.1. General procedure for the creation of a viable case study	9
4.2. P1: Investigate the current state of the system	11
4.3. P2: Extract necessary system parts for the requirements	11
4.4. P3: Check fulfillment of requirements	13
4.5. P4: Fix all shortcomings by defining system extensions	14
4.6. P5: Evaluation of the access rights	14
4.7. M1: Store the results in a milestone	15
4.8. P6: Definition of scenarios	15
4.9. P7: Evaluation of the covered information flow classes	16
4.10. Conclusion of the procedure	16
5. Analysis of CoCoME	17
5.1. CoCoME overview	17
5.1.1. Platform migration	18
5.1.2. Addition of a Pickup shop	18
5.1.3. Database migration	18
5.1.4. Service adapter	20

5.2.	Application of the method	20
5.2.1.	Investigation of the current state of CoCoME	20
5.2.2.	Identify relevant parts for the requirements	20
5.2.3.	Analysis of the current state for CoCoME	26
5.3.	Summary of shortcoming in CoCoME	27
5.3.1.	Use cases	27
5.3.2.	Security relevant data	28
5.3.3.	Definition of roles	28
5.3.4.	Definition of access rights	28
5.3.5.	Data processing in security relevant components	28
5.4.	Add system extensions	28
6.	Case study system	31
6.1.	Scenario: stock manager requests the report for a customer	31
6.1.1.	Description	31
6.1.2.	CoCoME excerpt	31
6.1.3.	Data types and access rights	32
6.1.4.	Component behavior	33
6.2.	Scenario: Support employee requests information for an order	34
6.2.1.	Description	34
6.2.2.	Identification of a new use case	36
6.2.3.	CoCoME excerpt	38
6.2.4.	Data types and access rights	38
6.2.5.	Component behavior	39
7.	Evaluation	43
7.1.	GQM plan	43
7.2.	Applicability of the introduced method	43
7.2.1.	Is the introduced method applicable to a concrete system	43
7.3.	Usability of the created case study for data-based privacy analysis	45
7.3.1.	Are the access rights well defined ?	45
7.3.2.	Is the created case Study usable for different information flow classes?	46
7.4.	Expressiveness of data centric PCM	47
7.4.1.	Is the created case study expressible with PCM ?	47
7.4.2.	Number of missing elements for the different	48
7.5.	Discussion	48
8.	Related work	51
9.	Conclusion and future work	53
9.1.	Conclusion	53
9.2.	Benefits of our work	54
9.3.	Future work	54
9.3.1.	Method	54

9.3.2.	Case study system	54
9.3.3.	Meta model extension	55
Bibliography		57
A. Appendix		59
A.1.	First Appendix Section	59

List of Figures

2.1.	Simple data flow diagram for linking an order of different products to a mail address	3
2.2.	A simple component based system	5
4.1.	General overview over the procedure for creating a viable case study . .	10
4.2.	Reduced ACM to the show the concept.	13
4.3.	Overview of the evaluation of the access rights.	15
4.4.	Overview over the GQM plan for the evaluation of the added data flows.	16
5.1.	The figure shows a simplified overview over the hybrid cloud based variant	19
5.2.	The figure shows an simplified overview of the CoCoME. The Webservice component is omitted.	24
6.1.	The usage model for the Scenario: StockManager requests a report for a customer.	31
6.2.	Excerpt of CoCoME in which the described scenarios takes place.	32
6.3.	Resulting data flow for the scenario: StockManager request the report for a customer	35
6.4.	The resulting data flow for the scenario: Support employee requests information for an order.	41
7.1.	The GQM plan for the three parts of the evaluation. Each part is divided into	44

List of Tables

4.1.	An overview over all the requirements for the creation of a case study. .	12
4.2.	A simple example to showcase an OpM.	13
5.1.	Overview for the requirements for a case study	21
5.2.	The ACM of CoCoME. The legend for the ACM is: 1 is the access right <i>FullAccess</i> , 2 is the access right <i>AccessToUsedData</i> , 3 is the access right <i>AccessToOwnedData</i> , 4 is the access right <i>Default</i> . The abbreviation <i>p& s data</i> stands for product& sales related data.	25
5.3.	Overview of the different types of data processing in the components. For each component, it is defined how which data class can be processed. We omitted in the top row the specifier data due to space constraints.	27
5.4.	The updated Version of the ACM for CoCoME after the shortcomings are fixed. The legend for the ACM is: 1 is the access right <i>FullAccess</i> , 2 is the access right <i>AccessToUsedData</i> , 3 is the access right <i>AccessToOwnedData</i> , 4 is the access right <i>NoAccess</i> . The bold entries the updated access rights. .	30
6.1.	An ACM showing the access rights for the case study system.	33
6.2.	A matrix showing the data processing for each component. the abbreviate <i>p& s data</i> stands for product and sales data.	33
6.3.	Access right for the role <i>Support employee</i> . 1 refers to the access right <i>FullAccess</i> , 2 refers to the access right <i>AccessToUsedData</i> , 3 refers to the access right <i>AccessToOwnedData</i> , 4 refers to the access right <i>Default</i>	37
7.1.	Overview of the evaluation result for the access rights.	49
7.2.	Overview over the evaluation result for the data flows.	49
7.3.	Overview over the results for the evaluation of PCM.	50

1. Introduction

1.1. Motivation

As software systems become more interconnected and complex, it becomes increasingly difficult to ensure security in general and data protection in particular. First of all, the financial loss through possible leaks are immense [15]. But the betrayal of the customer might be the greater issue. All in all, the guarantee of privacy should be a primary design goal for all commercially used systems. Privacy, on the other hand, is a non-functional requirement and it is difficult to ensure compliance. For this reason, there are three exemplary lightweight approaches to allow a privacy analysis on an architectural level. First the approach of Seifermann[13], uses data flows to check privacy on an architectural level. UMLsec[6] uses an attacker model to verify security on an architectural level. At last SecureUML[7], that defines an extension to already existing models to allow the modeling of a secure state of a system. To evaluate these kind of approaches, case studies are commonly used.

It is not simple to create suitable case studies for a data-based architectural security analysis. Often these systems are modeled exactly for one approach. We have used Seifermann's approach[13] to get an approximate idea of how data based privacy analyses work. Based on this, we developed a process for creating a case study that can be used to validate data-based data privacy analysis approaches in general. To verify the applicability of our methodology we applied it to the Community Component Modeling Example (CoCoME)[4] and created a case study. Further, we provide evaluation criteria to measure the quality of the defined access rights. The access rights were defined during the process. Also we provided criteria to verify which information flow classes are covered by the created case study. On this basis, it is possible to decide how appropriate the created case study is for validating an data-based privacy analysis approach.

1.2. Contributions

First of all, we defined a method to create case studies that may be used to conduct and validate data-based privacy analyses on an architectural level. Also we defined an evaluation for the created case study. The evaluation allows to validate the quality of defined access rights and the covered information flow classes. We created a sample case study from CoCoME[4] and evaluated it. In procedure of creating the case study from CoCoME, we discovered some vagueness in CoCoME. Some data types were not defined at all, for example. To fix this, we provided definitions for all vague elements of CoCoME that we used in our case study. The definitions mainly include roles, data and access rights. Further, we used a meta model extension for the Palladio Component Model (PCM)[11]

provided by Seifermann[14] to model data flows in the resulting case study. We have evaluated the state of PCM with the metamodel extension to see if it is possible to use it in the case study.

1.3. Outline of the thesis

The thesis is organized as follows. In chapter 2, we introduce the foundations. In chapter 4, the method we are using to create a case study is presented. Next, we apply the introduced method over the course of two chapters. First, we analyze CoCoME (chapter 5) and define the missing elements and add it to the system, secondly, we create the case study in ??. In Evaluation we evaluate the method, case study and the used modeling language and discuss the evaluation. In chapter 8, we put the contributions in the context of related work. In the chapter 9, we conclude the thesis and discuss the future work.

2. Foundations

In this chapter, we will introduce the foundations that we are using in my thesis. For each, we will give a short definition and an explanatory example.

2.1. Terminology

2.1.1. security relevant data

The term *security relevant data* as used in this thesis, describes data which should be protected by the system. Security relevant data describes the data that causes harm for user or the system. As an example the security relevant data for a software system may consist of personal related informations, like name, address, credit card, etc. But the security relevant data is from system to system different. The term security relevant data is used in this thesis to describe data that is worth protecting in a system.

2.1.2. Data flow

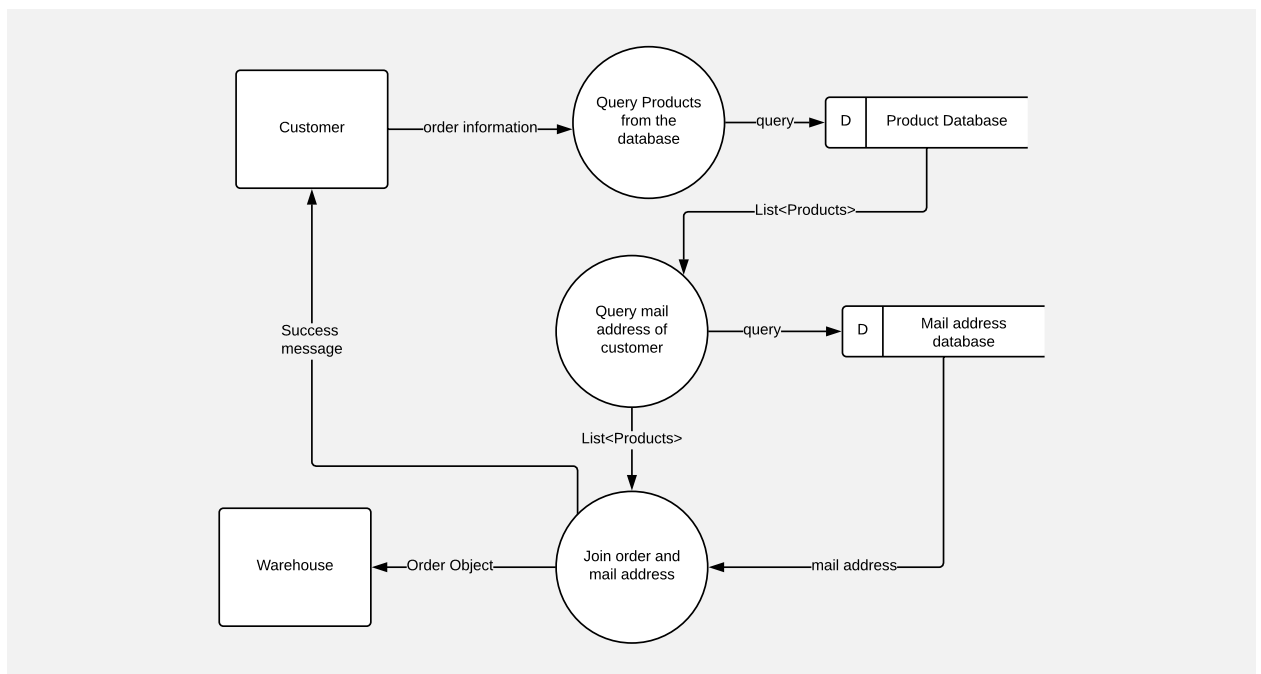


Figure 2.1.: Simple data flow diagram for linking an order of different products to a mail address

The term data flow is used in different fields of computer science. To name a few examples, data flow is used in software architecture, hardware architecture, networking, etc. We mainly use data flow in our architectural models

Data flow describes the way of data through a system. One can imagine data flows like an activity diagram. Each node in the diagram is either a process or an external entity. Processes are operations which processes the data. External entities are users or other systems which request or submit data. The edges between the nodes containing the type of the data passed. Also different data stores (most likely databases) are part of the diagram. These data stores holds different information, like the credentials, and are accessed via a process.

Figure 2.1 shows the simple process of ordering products and linking them to a mail address. The customer is already authenticated and inserts the order informations. Then the system queries all the necessary informations for the products from the database and adds them to a list. After that, the mail address of the customer is queried and packed in an object together with the product list. This object is then send to the warehouse and the customer is presented a success message. Later, the warehouse will collect the products and pack them in a delivery, but this is not a part of the diagram. For the sake of simplicity, eventual errors aren't modeled.

2.2. Palladio Component Model

2.2.1. Component based systems

Component based system are systems that consist out of components. Each component in a system is usually designed to fulfill one functionality, like connecting to a database, handling the user input, etc. It is possible that a component consists of multiply component. In such a composite component, each component also handles a single task. This allows to split larger tasks into smaller ones and assign each of them to a single component. This allows to reuse components that are designed to handle general tasks, like formatting data to a String. The definition of a component is that a component provides or requires an interface. The provided or required interfaces are used for communication between the components. Each of the interfaces is clearly defined. The components are chained together to a system using the interfaces. The main strength of the component based systems are the modularity by design. As simple example is shown in Figure 2.2. In the model a simple oline shop is shown. As shown, there is a component for managing the warehouse, a component for handling the business logic e.g. selling products and a component for the user interface. In this component based system the user interface is used by both customers and employees. Usually each of the components consists of different components for th different tasks.

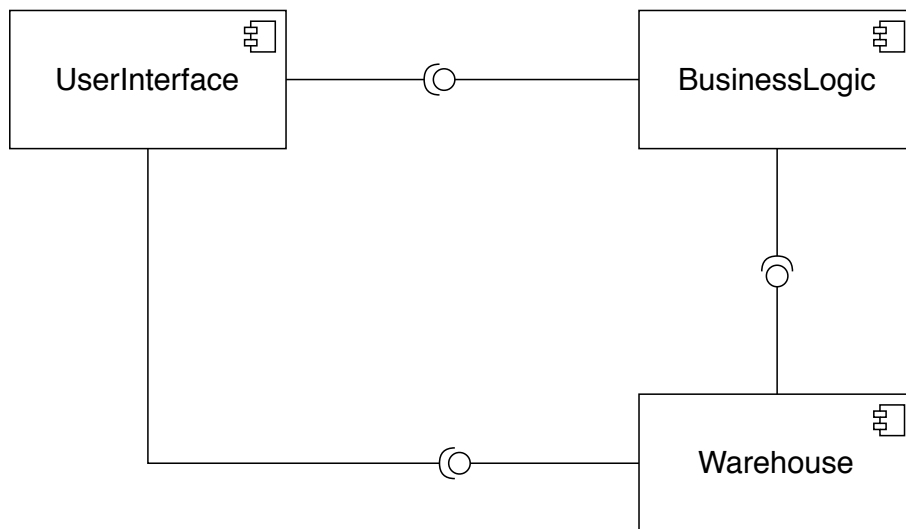


Figure 2.2.: A simple component based system

2.3. Data Centric PCM

2.3.1. Concept

The Palladio Component Model (PCM) is an architecture description language (ADL), that allows more than only modeling a system. The strength of PCM is compute performance predictions for the modeled system [11]. A PCM model consists of four different models, each of them encapsulate their specific design knowledge and the models build on each other. After the system is complete, an architect may compute different predictions how the system will perform when it is deployed. The predictions are for cost, reliability, performance and maintainability. In the following, we will explain the individual models and their encapsulated design knowledge in detail.

First of all, for each model a role inside the PCM is assigned, which will be explained in detail later. Each of this roles conserve their design knowledge in a specific model which is used by the next role. The hierarchy of the different roles, from top to bottom, is:

- **Component Developer**

The component developer specifies and implements the component. Furthermore, s/he has to provide additional information, that will be used for the predictions, PCM is able to compute. The resulting model is called *repository model* and is used by the system architect.

- **Software Architect**

The system architect builds the system using components. S/He connects the different components provided by component developers to a fully functional system. The resulting model is called *system model* and is used by the system deployer.

- **System Deployer**

The system deployer decides how the system is distributed between the available

resources. This role creates two resulting models. First, the *resource model*, in which the resources characteristics, for example transfer rate. Second, the *allocation model*, in which the allocation of the different resources to the different parts of the system is conserved. These models are used by the domain expert.

- **Domain Expert**

Domain experts creates the *usage model* for the system. This describes user behavior. Also they specify the user workload. This workloads can be open or closed. In the closed case, a finite number of user interact with the system, in the open case the domain expert specifies the user arrival per time slice.

As the domain expert is the last role in the chain, the models aren't used by another role. With the addition of the usage model the creation of the system model is complete.

After all the different models are created, a prediction may be computed and without a line of code is written and the architects can see if there are flaws in the architecture. The PCM models are more than just a system model. A lot of domain knowledge is encapsulated in the resulting models. The result are more a simulation for the upcoming system than a system model.

2.3.2. Meta model extension for data centric PCM

In this section, we are going to explain the meta model extension to the PCM provided by Seifermann [14]. The extension is lightweight. It aims to embed data flows in an already existing PCM model.

In the current state of PCM, it is not possible to model data flows. Therefore Seifermann created a meta model extension. The meta model extension is called data processing.

The meta models extends the Service Effect Specification (SEFF) for a component in the repository model. SEFFs are similar to UML activity diagrams. Like Activity diagrams, SEFFs specify the observable behavior for a system, in the case of PCM SEFFs specify the observable behavior for a component. SEFFs are used to model different types of actions. These actions holds various information about the systems performance and are chained together to create a sequence of events to model the (observable) behavior of a specific component.

The meta model extension is specially for these SEFFs. The main goal for this meta model extension was to model data processing. For each action in a SEFF an operation may be defined that specifies the data processing for this action. The operations model different types of manipulation of data. All SEFFs chained together in model already create a model similar to an activity diagram. For each activity a operation that processes data is specified. With this operations chained together it is possible to create a data flow for the model.

3. Related work

4. Procedure

In this chapter we are going to present a procedure to create a case study that can be used to evaluate a data-based privacy analysis. The privacy is defined by access rights. We will describe the procedure step by step and the places where the case study will be evaluated. During the process, the case study is evaluated based on two aspects, the quality of the access rights and the covered information flow classes. Overall, the resulting case study consists of an extended system model. The extensions include the access rights and the added data flows.

First, we give a brief overview over the procedure shown in Figure 4.1. After that each step will be explained in detail.

The procedure consists of seven consecutive steps. First the current state of the system is reviewed, secondly the necessary elements for the requirements are extracted. Thereafter the fulfillment of the requirements is reviewed and the required system extensions are defined in the next step. Afterwards, the access rights are evaluated and the results are stored in a milestone. Then scenarios for the system are defined. In the final step, the information flow classes covered by the scenarios are evaluated. Finally, it is decided whether the case study is sufficient for the intended use.

4.1. General procedure for the creation of a viable case study

Here we describe the procedure for creating a case study. An overview is shown in Figure 4.1. We cover the steps P1-P7 that are necessary to create a case study. We further explain places when the evaluations are conducted.

The first step is to decide whether it is worthwhile to prepare a case study based on the system under investigation. This is decided by reviewing the current documentation. The goal is to In a second step, six requirements for creating a case study are introduced (see . The first requirement is that the system is modeled as a component based system or components can be derived from the current documentation of the system. The second requirements is the definition of use cases. The third requirement is to identify the data in the system and identify which of the data is security relevant. The fourth requirement is the definition of user roles in the examined system. The fifth requirement is definition of access rights between (security relevant) data and the user roles. The access rights can either be generated from the previous requirements or extracted from the documentation. The sixth and last requirement is the identification or definition of the different types of data processing. Furthermore, for each component it is either defined or identified which data is processed as in the individual component.

In the third step, the current fulfillment of requirements are analyzed and collected in a summary. Usually there are shortcomings. If there are none, the next step can be skipped.

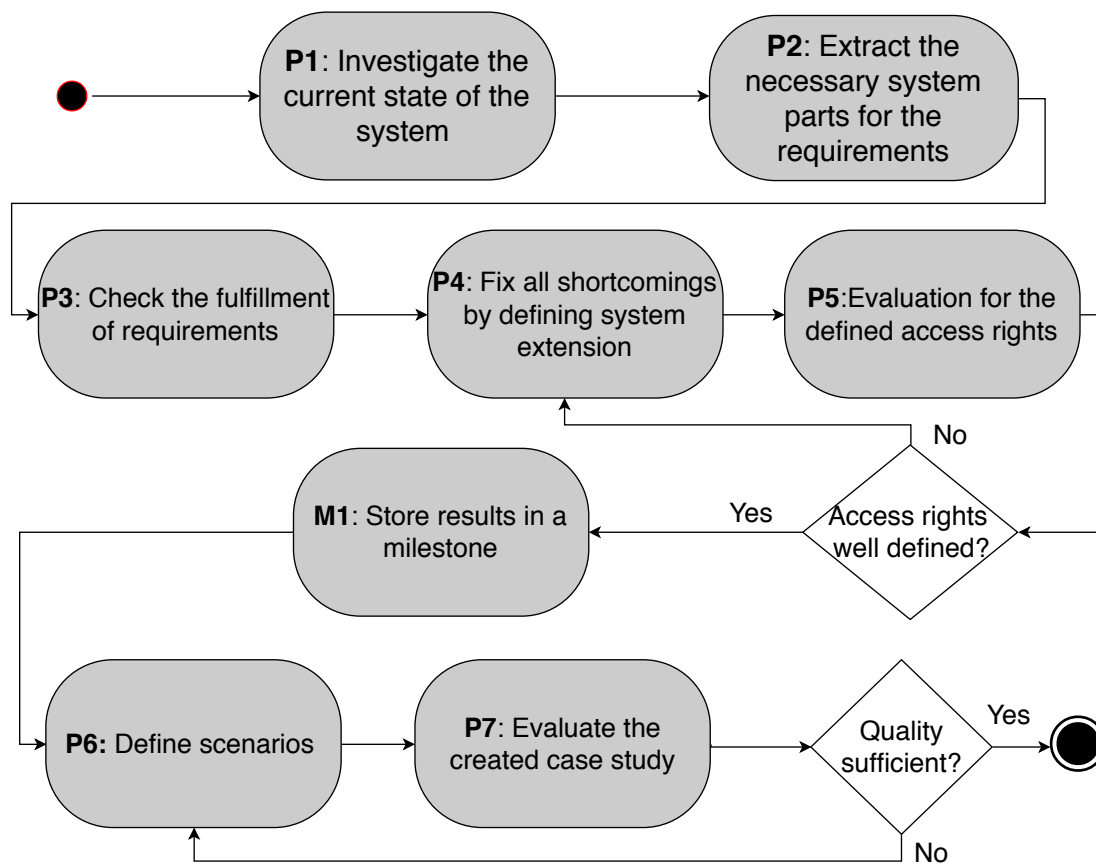


Figure 4.1.: General overview over the procedure for creating a viable case study

In the fourth system extensions for the missing parts of the requirements are defined.

In the next step, the evaluation for the the access rights is conducted.

After the evaluation is done and the results are sufficient, the milestone is reached. All necessary parts of the system are present, so that a case study can be created. If the results are not sufficient the procedure iterates back to the fourth step. In the sixth step, scenarios are defined, from which data flows are derived. Finally, the data flows and the access rights are added to the system model.

In the seventh step the covered information flow classes are evaluated. Then it is decided if enough information flow classes are covered for the planned use of the case study. If not, the procedure iterates back to the sixth step. Otherwise, the procedure is concluded and the case study is created. The case study finally consists of the system model extended by data flows and the access rights.

4.2. P1: Investigate the current state of the system

Before the process is started, a first glance at the present system is taken. This first glance is taken to decide whether it is worthwhile to start the process. It is checked if the system is sufficiently defined in *width* and *depth*. *Width* checks how many different system models are already defined. *Depth* checks how detailed each model is defined. The outcome is system dependent. For example, it could be important how much work one is willing to do before starting the process. The idea behind this step is to decide beforehand if the system is in a state where it is more than just a bare concept and the case study can be constructed with reasonable effort.

4.3. P2: Extract necessary system parts for the requirements

The second step in the procedure is to extract the corresponding elements or definitions from the system for each requirement. Altogether, six requirements are necessary for the creation of a viable case study.

R1: Modeled as component based system The first requirement is that the system is modeled as a component based system or it is possible to derive a component based system from the current state. This allows to use all benefits that a component based system has and make it much easier to construct a case study. Firstly, in component based system there are well defined interfaces. These interfaces defining points in the architecture where data is transmitted. This ease up the creation of data flows, because one can directly identify where the data is processed. Secondly, component based systems are easy to extend. Therefore, it is not that complex to add missing elements to the model. Thirdly, the component based structure enables modularity. So it is relatively easy to just took an excerpt and take a close look on just this excerpt. All in all combined, component based systems excel in their modularity and their clear defined interfaces, that ease up the creation of a case study.

Requirements	
R1	component based system
R2	Definition of use cases
R3	Security relevant data
R4	Definition of user roles
R5	Definition of access rights
R6	Definition of the type of data processing in the components

Table 4.1.: An overview over all the requirements for the creation of a case study.

R2: Definition of use cases The second requirement is the definition of use cases in the system or it is possible to derive use cases from, for example, the documentation. This allows to get a good idea how the different users are going to interact with the system. Further, the use cases give a basic idea of the general interaction with the system.

R3: Existence of security relevant data The third requirement for a viable case study is the existence of security relevant data in the system. If there is no critical data in the system, the entire case study that is created to verify the protection of security relevant data is pointless. The definition of security-relevant data is highly dependent on the system under investigation. This means for each system and each context there are other data that is considered security relevant, therefore a lot of domain knowledge is required to identify the data. Breier [2] introduced a basic approach to valuate assets. The basic idea of the approach is to value the various assets in terms of their priority within the system.

R4: Existence of different user roles The fourth requirement for the case study is the definition of user roles, in the following briefly roles, for the system. Roles are used to model different types of user for a system. Each role maps to one type of user. Roles are used to model the different users that are interacting with the system. Different roles uses on different data inside the system. For example the security relevant data mentioned in R3. The roles depend heavily on the system being studied. Each system defines different roles. For each system under investigation the use cases (R2) are a good source of informations. One can use business processes [9] to identify roles in a system.

R5: Definition of access rights The fifth requirement is the definition of access rights. For the definition of access rights, we use the fine-grained, higher level form proposed by Evered and Bögeholz [3] in contrast to the familiar used read/write semantics. For this step, we assume the system is in a correct state. The access rights are define on the basis of the current state of the system. As already mentioned, each component has a clearly defined interface. These interfaces are used for communication with other components. This structure is used to define a finer grained form of access control. For each component and each role, the access rights for the data types in the component are defined individually. The access rights are stored in a matrix, the so called access control matrix (ACM). In Figure 4.2 an minimal ACM is shown to get a better idea of the concept. The matrix shows that the role *Employee* in the component *Usermanager* has full access to username. Also

ACM	Usermanager
Employee	username: fullAccess password: noAccess

Figure 4.2.: Reduced ACM to the show the concept.

•	Login data
User interface	transmit

Table 4.2.: A simple example to showcase an OpM.

it is shown, that the same role in the same component has no access to the password. It may happen that data is the combination of different data types. In this case, the more restrictive access rights applies. To clarify this, if the employee tries to access a (*username*, *password*) tuple, s/he is granted no access to the tuple.

R6: Definition of type of data processing in the components In the sixth requirement the type of data processing for each data type in each component is defined. As the the requirement R5, the necessary elements for this requirement may be derived from previous ones, namely R1, R2 and R3. In R1 ensures that the system is modeled as a component-based system. With R2 (definition of use cases) and R3 (security relevant data) it is possible to identify how which data is processed. The different processing types are described through different operations. The various operations describe how and which data is processed in a specific component. Each operation has one more inputs and produces one or more outputs. The operations needed are highly system-dependent. Operations could describe the transmission of data, processing of user inputs or operations used in the relational algebra. The identified operations are stored in an operations matrix (OpM). In this matrix, for each component it is stored with which operations data can be processed. In Table 4.2 an excerpt of an OpM is shown. As one can see, in the component *User interface* it is only possible to transmit the login data to other components.

4.4. P3: Check fulfillment of requirements

In this step the current state of requirements is reviewed. The best case is, that all requirements are fulfilled. If this is the case, one can skip the next step. If it is not the case, create a summary of all shortcomings for the fulfillment of requirements in the system. After the first two steps of the procedure are done the usual case is that some of the requirements are not fulfilled. It may even happen that for some requirements are no elements present in the system. The review of the shortcomings is important to outline which parts of the system are vague. Vague in the context of the thesis means that some elements (e.g roles, access rights) are not well defined. To give an example, it may happen that roles are just mentioned but a clear definition of the role is missing. This summary of shortcomings may also show parts where the model is not well defined. This may lead to an improvement of the model in the next step. After the summary is complete, the

procedure moves to the next step. The summary is done due to two reasons. Firstly, to get a comprehensive overview of the current state of the system and secondly, to enable a division of tasks.

4.5. P4: Fix all shortcomings by defining system extensions

In the previous step, a summary of the shortcomings in the system was created. In this summary, all system components that stand in the way of fulfilling the requirements are stored. In this step, the system extensions are defined to fulfill all requirements. When defining system extensions, the first step is to derive the needed extensions from the documentation. In the case, the documentation isn't clear or it is not possible to derive extensions for the shortcomings, the option left is to define the system extensions to the best of your knowledge. This is sometimes necessary, but there are some dangers involved. It may happen that the resulting case study is less realistic and therefore provides less satisfying results, when used in a later analysis.

4.6. P5: Evaluation of the access rights

In this part of the procedure, the access rights are evaluated. The evaluation follows a GQM-plan, shown in Figure 4.3. The access rights are evaluated based on seven criteria presented by Evered and Bögeholz [3]. We divided the seven criteria in three categories: *specification*, *comprehensibility* and *implementation*. *Specification* how the access rights are defined. *Comprehensibility* evaluates how well access rights can be understood by others. *Implementation* evaluates the way the access rights are embedded in the code. It may not be possible for all systems to evaluate all seven criteria. The seven criteria are:

- Concise : Access rights should be precise and simple.
- Clear: At first glance one can see what the access rights state.
- Aspect-oriented: The access rights may be used in different contexts
- Need-to-know: each role only should have the absolute necessary informations
- Positive: Each right to data has to be given specifically to each role.
- Fundamental: The access rights are realized inside the code
- Efficient: The overhead caused by the checks of the access rights is reasonable.

The evaluation is done in a checklist manner. For each criterion it is checked whether the system fulfills the criterion or not.

After the evaluation of the access rights is done, the results are analyzed. If sufficient criteria for the purpose of the case study are fulfilled, the current state of the system is considered correct. If the results are unsatisfying, the procedure moves back to the previous step P4. Otherwise the milestone is reached. The system is sufficiently defined so that is possible to add data flows and create a case study.

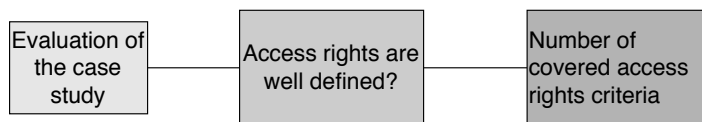


Figure 4.3.: Overview of the evaluation of the access rights.

4.7. M1: Store the results in a milestone

After the evaluation results are sufficient, the current state of the system is stored in a milestone. This includes all definitions made for the each requirement.

- R1: The system model.
- R2: Use case diagram, definition for each use case.
- R3: The data types and the examination, which data is security relevant.
- R4: The different user roles.
- R5: The created ACM.
- R6: The created OpM.

4.8. P6: Definition of scenarios

After the milestone is reached, scenarios for the case study are defined. Scenarios are a concrete characteristic of a use case or a concrete characteristic of an interaction with the system. The scenarios are defined taking into account requirements R2, R3, R4 and R6. R5 is omitted in order to reduce the bias of the system architects that not only scenarios are created that are consistent with the access rights. The main part of this step is to transform the created scenarios into data flows that are later added to the model. We will provide a procedure how to add data flows to the model. This is done step-by-step. The defined scenarios serve as the basis for the transformation. To realize the transformation three successive steps are needed.

In the first step, the components that are needed to realize the specific scenario are identified. Then these components are collected and added to a reduced model. In the second step, the reduced model is analyzed. The aim of the analysis is to map data and the respective type of processing to components. Then the data flows can be created and added to the reduced model. In an last optional step, the reduced model is added back to the originally model. This can be done, so all data flows are available in the original model. This procedure is repeated for each scenario. After that, the access rights are also added to the component model. The structure of the access control matrix is used. For each component, the respective access rights of a role to the data types of a component are added to the respective components. After this is done, the definition of the scenarios is complete and the added data flows can be evaluated.

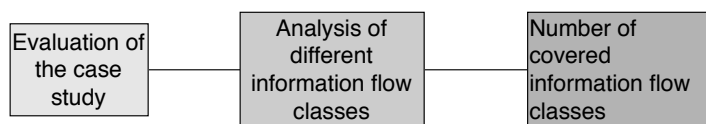


Figure 4.4.: Overview over the GQM plan for the evaluation of the added data flows.

4.9. P7:Evaluation of the covered information flow classes

The last step, is the evaluation of the defined scenarios for the system. The scenarios are evaluated on the basis of the information flow classes covered, which may differ according to the objective or use of the case study. The evaluation follows a GQM-plan. The plan is shown in Figure 4.4. We propose to use Non-influence [8] and the included information flow classes to evaluate the scenarios. Non-influence consist of the two part: non-interference and non-leakage. Non-interference describes, that in a program flow inputs of high users do not influence the output for low users. Non-leakage describes that it is not possible to observe if a specific action in the system has taken place.

non-interference and non-leakage may be described by four information flow classes:

- No illegal information flow:
- No information flow from high to low:
- No direct information flow:
- No observable information flow:

After the evaluation for the information flow classes is done, the procedure moves to the next step.

4.10. Conclusion of the procedure

After the second evaluation is conducted, it is necessary to decide if the coverage of the information flow classes are sufficient for the goal of the cases study. If so, the procedure is finalized and the case study is created. Otherwise, the procedure moves back to the P6. The created case study

5. Analysis of CoCoME

To check the applicability of the method presented in chapter 4, we apply it to CoCoME. In this chapter we perform all steps up until the milestone. First of all, we give a brief overview over the CoCoME system, afterwards the necessary elements for the requirements are identified in CoCoME. After that, we analyze the fulfillment of the requirements seen in Table 5.1. Afterwards, we define system extensions to eliminate all shortcomings. Finally, we evaluate the created access rights. The results are stored in a milestone.

5.1. CoCoME overview

CoCoME is short for Common Component Modeling Example. For the sake of simplicity, a relatable scenario was chosen as a base for the system when it first was introduced in 2006.

The basic setting for CoCoME is to abstract the products management and the sell process of a big supermarket group like Lidl or Aldi. The goal of CoCoME is to provide an open source environment, in which different paradigms for component based software development can be tested. CoCoME tries to be as close as possible to the reality to provide a realistic environment to test new modeling approaches. In CoCoME there are various enterprises, each of them models an individual supermarket group. Each enterprise may has various stores, with each of them selling products . Each of these stores has various cash desk, where products are sold. Furthermore, CoCoME also handles the stock of each different stores. When a product is sold at a cash desk or a delivery from a supplier is accepted, the current stock is automatically updated. CoCoME provides three core functionalities:

- Operating of a register cash system
- Processing of inventory and order process of goods
- Providing of an web fronted for the services

CoCoME has been in development ever since. Over the years different variants emerged. Each variant was introduced to either react to new model pattern or solve problems that arose in the development or the deployment process. To keep this short, we will explain in detail only the hybrid cloud-based variant, as this is the variant we are using to apply the procedure.

The hybrid cloud based variant emerged from an earlier version. We use the description of the system provided in [4]. The hybrid cloud based variant was created by adding four evolutionary scenarios to CoCoME. These for evolutionary scenarios are : Platform

Migration, adding a Pickup shop, database migration and addition of a service adapter. First, we will give a quick overview over the general architecture, then we will describe each of the evolutionary scenarios briefly. The general architecture for the hybrid cloud based variant are shown in Figure 5.1. As shown, the architecture is divided in three different layers plus one layer to abstract the database.

The first layer is called the user interface. This layer includes the PickupShop and the Webfrontend components. The user interface is the point where the different users interact with CoCoME. Their request are transmitted to the underlying components and the results are displayed in this layer.

The second layer are the Webservices. This component transmit the requests from the user interface to the business logic. Further the webservices are used to add dynamically functionality to CoCoME.

The third layer is called Tradingssystem. This component is the heart and soul of CoCoME, because all the business logic is located here. All the different request from the users are handled here.

At last, the Service adapter is the extra layer to abstract the database.

5.1.1. Platform migration

The first evolutionary scenario is platform migration. This is done to reduce costs. The CoCoME system is moved to a cloud environment for easier scalability. If, for example, the pickup shop is heavily used, additional resources can easily be purchased.

5.1.2. Addition of a Pickup shop

The next evolutionary scenario is the addition of a Pickup shop to CoCoME. The Pickup shop offers a second sales channel for CoCoME to concurrent with web shops. Customer may order products online and pick them up in their chosen store. Therefore an account in the CoCoME system is required. With the Pickup shop, CoCoME changes from a closed to an open system. Technically, the pickup shop is realized through direct access to the database.

5.1.3. Database migration

In this evolutionary scenario the database is migrated to a cloud service. Due to the fact, that the Pickup shop and the stores both operate on the inventory, a higher amount of database request is expected. In order to avoid possible shortcomings in the performance, the database was moved to a cloud environment. This evolutionary scenario solves the scalability issue that arose with two sales channels. With the migration of the database a new issue arise. It may happen, for example, that data from enterprises that are located in the European Union (EU) are stored outside the EU, which does not comply with the current law.

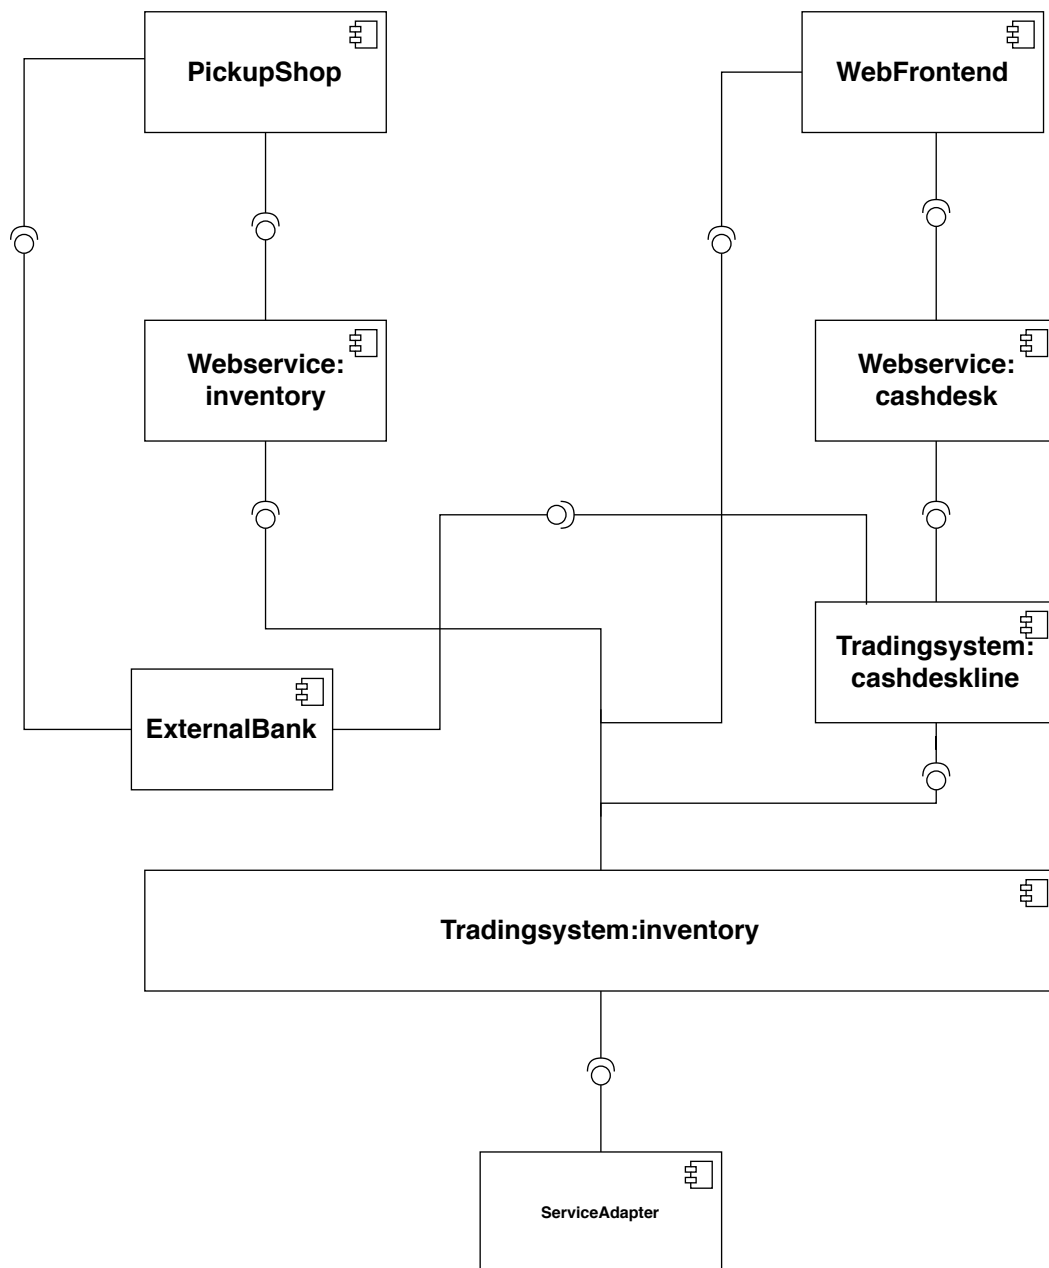


Figure 5.1.: The figure shows a simplified overview over the hybrid cloud based variant

5.1.4. Service adapter

Since CoCoME was always in development, CoCoME currently consists of a relatively large code base. Since this does not have to be understood by every single developer to work with CoCoME, a service adapter has been added. The service adapter allows CoCoME to dynamically add functionality.

Reasons for CoCoME to apply our procedure on The decision to use CoCoME as the system for applying the method was based on many reasons. The first is that CoCoME has already been modeled as a component-based system. Another reason is that CoCoME is described in detail in [4] and the CoCoME book [10]. On the other hand, CoCoME is more of a minimal solution to what is actually planned to achieve with CoCoME. One can say, CoCoME is rather a proof of concept than a fully functional system.

5.2. Application of the method

After an short overview over CoCoME in the previous section, we are starting with the procedure for the creation of a case study. Various publications for creating case studies other fields than computer science indicate that different sources of information should be used to create a case study [12]. We used as our main source of information the CoCoME tech report [4] and the CoCoME book [10], where the system is described in detail. Further we used the recent code of the implementation. If there are differences between documentation and code, the definitions from the documentation applies. We favor the documentation over the code because due to the fact that CoCoME is still in development. The documentation represents a stable version of CoCoME. In the implementation it may be possible that at the moment new features are tested that are later quashed.

We do not apply the procedure to the entire CoCoME system, but only to part of it that relates to the PickupShop ??.

5.2.1. Investigation of the current state of CoCoME

The aim of this step is to decide whether it is worth using the system for a case study. We check how complete the documentation is. This means to look for e.g. if the system models are defined or easy to generate. All in all, the step is to decide if the system's documentation is far enough developed.

In the case of CoCoME, a tech report and an implementation is available. Therefore, we decided the state of CoCoME is developed enough so that it is worthwhile to apply the procedure and create a case study.

5.2.2. Identify relevant parts for the requirements

In the next step, we identify the necessary parts of CoCoME for the six requirements listed in Table 5.1. In the following for each requirement we identify and extract the corresponding parts of the system.

Requirements	
R1	Component based system
R2	Use cases
R3	Security relevant data
R4	User roles
R5	Access rights
R6	Type of data processing in components

Table 5.1.: Overview for the requirements for a case study

5.2.2.1. R1: Component based system

This requirement is met because a component-based system model is defined in the CoCoME tech report. The requirement was defined to take advantage of all the strengths of a component-based system model.

5.2.2.2. R2: Existence of use cases

The CoCoME documentation defines thirteen use cases, so this requirement is also met. The use cases are important to get an idea for using the system but also to understand how different users interact with the system.

5.2.2.3. R3: Security relevant data

Since the amount of data is relatively large in the investigated excerpt of CoCoME, we have grouped the data into different equivalence classes. The data type in each class has the same security level. Composite data types are assigned to all included classes, but inherit the security levels from most restrictive class.

- customer data
This class describes all data types that are provided by the customer role. This includes names, addresses and credit card details, to name the most important ones. Since it is personal data of an entity, we classified it as **security relevant data**.
- product and sales data
All the data that is related to the products and the sales process. Examples for data types are price of a product, quantity of a product, date of shipping etc. Data in this class may become security relevant if it enables traceability to security relevant data. For this fact product and sales related data is not defined strictly security relevant. Nonetheless, access to this data can cause damage to an enterprise.
- account data
Account related data refers to the introduced accounts with the addition of the Pickup shop. It is needed that each role is registered with an account in the system. The account data type holds the *username* and the credentials for an account. We classified this data as **security relevant**, because access to account data allows to log in as the role.

- System data

In this class mainly summarizes the created query for access to the underlying data. Access to the issued queries allows to cause damage in a lot of different ways. It is possible to, for example, alter the database, read user informations, etc. Therefore this data is classified **security relevant**.

5.2.2.4. R4: roles

CoCoME defines five different roles in the tech report [4]. These are the *Customer*, the *Cashier*, the *StoreManager*, the *Enterprise manager* and the *Stockmanager*. There is no separate description of the roles. All the responsibilities are derived from the use cases described in the documentation and/or the implementation. The key informations we were looking are the tasks that a role performs in the context of CoCoME and which data is provided/required by the role.

- After analyzing the implementation, the *Customer* role is the role of all the customers of an enterprise, be they private customers or business customers. The role buys products, either in the stores or in the Pickup shop. The data provided by the customer role are the customer related data, It requires product related data to, for example, decide which products to buy.
- For the *Cashier* role, we rely on the defined use cases in CoCoME tech report. As shown, the role takes over the sale of products and therefore requires product & sales data. The role provides product and sales-related data like the data that is generated when orders are placed.
- For the *StoreManager* role, we relied on the use cases. The *StoreManager* handles the tasks of a single store. The role provides and requires product& sales related data.
- After an analysis of the use cases, we are not sure what the concrete tasks are for the *EnterpriseManager* and the data requires requires or provide. There are only two uses cases that involves the *EnterpriseManager*, therefore a clear definition is not possible. Unfortunately, the code does not contain any further information. From the name it can be derived that the role is in charge of a whole enterprise.
- After analyzing the use cases, it is clear that the *StockManger* handles the stock of a single store. Therefore the role requires product&sales related data and provides the same type in the system.

Since the hybrid cloud based variant is examined by us, all roles provide account data, because each role needs an account in CoCoME.

5.2.2.5. R5: access rights

For the access rights, we used the finer grained, high level from proposed by Evered and Bögeholz [3] in contrast to the well known read/write semantics for access control. We tried not to rely on a read/write semantic. Therefore, as described in Procedure, We

have defined access to the various data classes within a component for each component and for each role. We defined four different privilege level for the access to data. In the following enumeration, we used the identified elements from the previous requirements R2 (subsubsection 5.2.2.2), R3 (subsubsection 5.2.2.3) and R4 (subsubsection 5.2.2.4) to define fitting access rights for CoCoME. The access to data decreases with the ascending numbers.

1. **FullAccess**

This access rights defines that the associated role has access to all data types for the respective class in the component

2. **AccessToUsedData**

This access right defines that the role has accessed to it used data types for the respective class in the component. Used data in this context means the data types that are required by the role to perform its defined tasks.

3. **AccessToOwnedData**

This access right defines that the associated role has access to its , for example, own account data or customer data. This access rights ensures that roles may access data that is provided by it but not needed for their tasks.

4. **Default** This access right forbids the complete access to all data in a class for this role and component.

Another part of this requirement is the identification of the present data types in each component. After analyzing the code and the CoCoME tech report, we identified data for each class of data in each component. Also we identified that no role except the customer may access the PickupShop component. In Figure 5.2 a simplified overview over the architecture of CoCoME is shown to better understand the complex matrix shown in Table 5.2.2.5. We omitted the webservice because this component only delegates the data to other components and therefore does not influence the result. For the fact that the ACM in Table 5.2.2.5 is rather large and complex, we point out the most important points. In the CoCoME tech report it is stated that only the customer may access the *PickupShop* component. From the role definition we identified the EnterpriseManager handles an whole enterprise, therefore the role is allowed to access all components. For this reasons, no access rights defined for other roles are defined for the PickupShop. Further, the StockManager has no access to the Tradingsystem:cashdeskline component, because it is not needed to fulfill his tasks. The role handles the stock and has therefore no tasks that involve the actual selling of products. Since no role can access CoCoME without the components Webfrontned or PickupShop, the access rights are from this components are inherited. This means that the access rights are the same in all underlying components. The idea behind this is that it is also important which role which data has entered into the system. No role has access to system related data. The StockManager has access to customer related data due to the use case 13 (UC13).

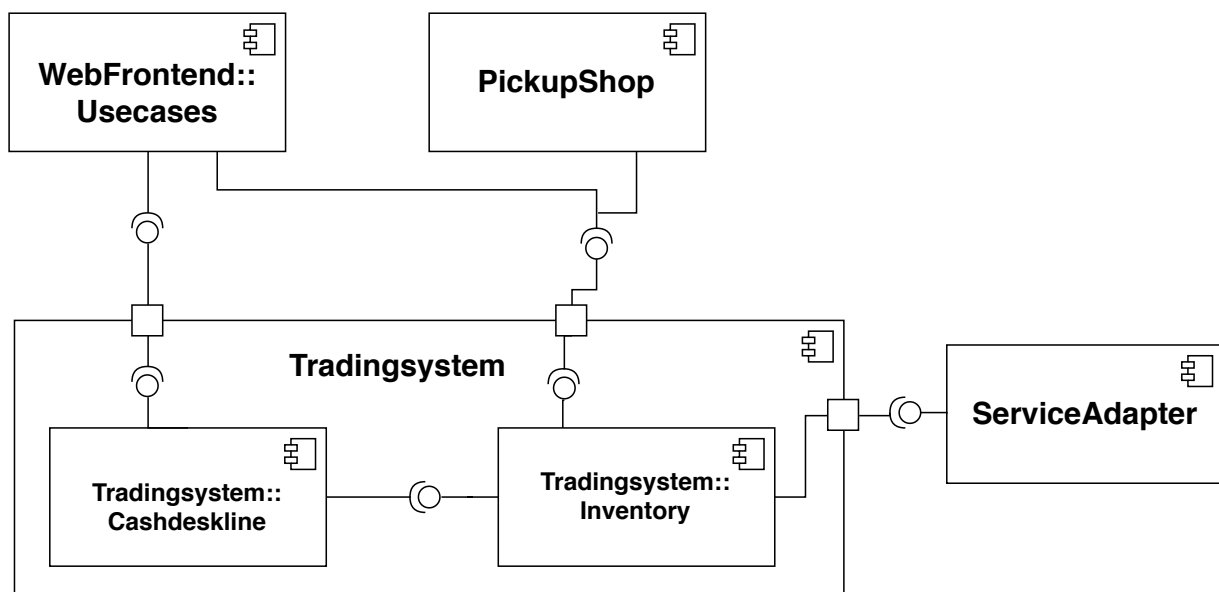


Figure 5.2.: The figure shows an simplified overview of the CoCoME. The Webservice component is omitted.

ACM	Webfrontend		PickupShop		TS:cashdeskline		TS:inventory	
customer	customer data	3	customer data	3	customer data	3	customer data	3
	account data	3	account data	3	account data	3	account data	3
	p&s data	3	p&s data	3	p&s data	3	p&s data	3
	system data	4	system data	4	system data	4	system data	4
cashier	customer data	3	customer data	4	customer data	3	customer data	3
	account data	3	account data	4	account data	3	account data	3
	p&s data	2	p&s data	4	p&s data	2	p&s data	2
	system data	4	system data	4	system data	4	system data	4
StockManager	customer data	2	customer data	4	customer data	4	customer data	2
	account data	3	account data	4	account data	4	account data	3
	p&s data	2	p&s data	4	p&s data	4	p&s data	2
	system data	4	system data	4	system data	4	system data	4
EnterpriseManager	customer data	2	customer data	2	customer data	2	customer data	2
	account data	2	account data	2	account data	2	account data	2
	p&s data	2	p&s data	2	p&s data	2	p&s data	2
	system data	2	system data	2	system data	2	system data	2
StoreManager	customer data	2	customer data	4	customer data	2	customer data	2
	account data	3	account data	4	account data	3	account data	3
	p&s data	2	p&s data	4	p&s data	2	p&s data	2
	system data	4	system data	4	system data	4	system data	4

Table 5.2.: The ACM of CoCoME. The legend for the ACM is: 1 is the access right *FullAccess*, 2 is the access right *AccessToUsedData*, 3 is the access right *AccessToOwnedData*, 4 is the access right *Default*. The abbreviation *p& s data* stands for product& sales related data.

5.2.2.6. R6: Type of data processing in components

In the last step of the procedure for each component the type of data processing is defined. we identified after an analysis of the code and the CoCoME tech report three different types of data processing.

- relational algebra
This type describes the operations of relational algebra on a database or similar construct. For example, if all elements of a list that have a particular ID are selected from this list
- transmission of data
This type describes the transmission of data between components.
- changing of data classes
This type includes the most operations. It describes each operation that changes the data class. Good examples are the creation of lists or the merging two or more data classes into one.
- I/O related processing
This type describes input and/or output of data by the user.

Then we have assigned one or more types for each component and each role. We omitted the Webservice component because it only delegates the data to other components and has no effect on the result. The result is shown in Table 5.3. In the matrix for each data class it is defined how which this data class can be processed in the components. To give simple example, in the *Webfrontend* the customer data can only be transmitted to other components. In the *Tradingsystem:inventory:application*, the same data may also be changed to another data class. As shown, we divided the *Tradingsystem:inventory* component. This was done because the sub-components have different type of processing.

5.2.3. Analysis of the current state for CoCoME

With all necessary parts defined and identified, we analyze the current state of CoCoME. In the following, for each requirement the current state is briefly explained.

- R1: Modeled as a component based system
In the CoCoME tech report a detailed system model is defined. So this requirement is fully accomplished.
- R2: Existence of use cases
Uses cases are defined in the CoCoME documentation. So this requirement is also fulfilled.
- R3: Existence of security relevant data
In CoCoME is security relevant data present. But for some mentioned data a definition is missing.

Types of data processing	customer	account	sales and product	system
Webfrontend	transmit	transmit	I/O-processing transmit	non-existent
PickupShop	transmit	transmit	I/O-processing, transmit	non-existent
Tradingsystem: inventory:app	change transmit	change transmit	change	non-existent
Tradingsystem: inventory:data	relational algebra operations	relational algebra operations	relational algebra operations	change
Tradingsystem: cashdeskline	change transmit	non-existent	change transmit	non-existent

Table 5.3.: Overview of the different types of data processing in the components. For each component, it is defined how which data class can be processed. We omitted in the top row the specifier data due to space constraints.

- R4: definition of user roles

The role of the EnterpriseManager is rather vaguely defined. It is possible to set the role in context with others, but the tasks in CoCoME and the data needed/provided are not crystal clear. There is room for interpretation as to what exact data and exact tasks this role has. This room for interpretation can also be found to a lesser extent in the roles of StoreManager and StockManager.

- R5: Definition of access rights

As we have defined the access rights to the current state of the system, this requirement is fulfilled. If changes or additions are made to R2-R4, the access rights must be checked and adjusted if necessary.

- R6: definition of the different types of data processing

From our current point of view, we fulfilled this requirement. We have covered every possible type of data processing that we could think of.

5.3. Summary of shortcoming in CoCoME

5.3.1. Use cases

In the use cases, there are shortcomings. While analyzing them, we found that only the newly added ones by the addition of the pickup shop processing security relevant data. Therefore the pool of possible use cases that later may be used to create scenarios from, are limited.

5.3.2. Security relevant data

As previously said, definitions for data are missing. We have found that there is currently no definition of how to connect a customer to their purchased products. This missing data is used in the UC13 described in the CoCoME tech report [4]. Another case of missing data definitions, happens in the same use case. A report data type is mentioned but never clear defined. So this data type is also missing.

5.3.3. Definition of roles

There are some vagueness in the roles, which possibly affects the ACM. Some provided/required data is not clear defined. But the tasks of the roles are clearly defined.

5.3.4. Definition of access rights

If any changes are done in the previous requirements R2-R4, the state of the access rights has to be reviewed and possibly updated to the new version. In the current state the requirement is fulfilled.

5.3.5. Data processing in security relevant components

In this aspect, there are no shortcomings. All necessary types of operations are defined.

5.4. Add system extensions

In the next step, we extend CoCoME so that all requirements are fulfilled. In the previous step all shortcomings are listed. We give a short overview how we extended the system to meet all the requirements. As previously said, the use cases are already well defined, so there is nothing to fix.

- **security relevant data**

We added new data to the customer related data. The customer object now holds a list with all ordered products. With this addition, the shortcoming, that there was no connection between customer and the ordered products, is fixed. We also defined the *report* data type. This data type is used to display the purchased products of a customer to the stock manager. We defined it as a human readable list and it is placed in product& sales data class.

- **roles**

In the roles there is some vagueness. Especially in the *StockManager* role. The setting in which the *StockManager* operates is clear, but the inherited responsibility are not. So we defined, that the *StockManager* only handles the stock. This includes, managing the warehouse, commissioning of goods, etc. Another responsibility we added, is to predict the future needs of products. To perform any of these tasks, no customer related data is needed. Further, we defined the role of the *EnterpriseManager*.

We defined it as the highest role of the respective company and therefore has access to all data within the company.

After all the definitions for data and roles is added, we review the ACM and the types of data processing.

An updated version of the ACM is shown in Table 5.4. As defined the EnterpriseManager got access to all data except the system related data and the Stockmanager has lost access to customer related data. All changes to the matrix are displayed bold.

For the types of data processing for the single components nothing changed.

With all the extensions added to the system, the mile stone is reached. In CoCoME all elements are available for creating a case study for databased privacy analysis.

ACM	Webfrontend		PickupShop		TS:cashdeskline		TS:inventory	
customer	customer data	3	customer data	3	customer data	3	customer data	3
	account data	3	account data	3	account data	3	account data	3
	p&s data	3	p&s data	3	p&s data	3	p&s data	3
	system data	4	system data	4	system data	4	system data	4
cashier	customer data	3	customer data	4	customer data	3	customer data	3
	account data	3	account data	4	account data	3	account data	3
	p&s data	2	p&s data	4	p&s data	2	p&s data	2
	system data	4	system data	4	system data	4	system data	4
StockManager	customer data	4	customer data	4	customer data	4	customer data	4
	account data	3	account data	4	account data	4	account data	3
	p&s data	2	p&s data	4	p&s data	4	p&s data	2
	system data	4	system data	4	system data	4	system data	4
EnterpriseManager	customer data	1	customer data	1	customer data	1	customer data	1
	account data	1	account data	1	account data	1	account data	1
	p&s data	1	p&s data	1	p&s data	1	p&s data	1
	system data	4	system data	4	system data	4	system data	4
StoreManager	customer data	2	customer data	4	customer data	2	customer data	2
	account data	3	account data	4	account data	3	account data	3
	p&s data	2	p&s data	4	p&s data	2	p&s data	2
	system data	4	system data	4	system data	4	system data	4

Table 5.4.: The updated Version of the ACM for CoCoME after the shortcomings are fixed. The legend for the ACM is: 1 is the access right *FullAccess*, 2 is the access right *AccessToUsedData*, 3 is the access right *AccessToOwnedData*, 4 is the access right *NoAccess*. The bold entries the updated access rights.

6. Case study system

After we reached the milestone in the last chapter, we are going to create the case study in this one. Therefore we have to define scenarios. Scenarios describe a course of actions in the system. Also the roles and data involved are specified. Scenarios are created to describe the flow of data and the course of actions in a comprehensive way. For presented case study system, we defined two scenarios in CoCoME. All defined scenarios are later converted into data flows by using the matrices in Table 5.4 and Table 5.3. The data flows then added to the system model, which concludes the creation of the case study. After that, the created case study can be evaluated. The basic structure for each scenario is: First, the scenario is briefly described. Then we identify the concrete data types for the scenario. We then describe the behavior of the individual components in a scenario. Finally, the resulting data flow is shown. The data flow can later be used for a data-based privacy analysis.

6.1. Scenario: stock manager requests the report for a customer

6.1.1. Description

The scenario is derived from UC13. This use case is described in the CoCoME tech report [4]. In this scenario, the stock manager requests an report for the purchased goods of a customer. To identify the customer among all customers, the stock manager has access to the ID of the customer. The role enters the ID in the system, then the request is processed by CoCoME. At the end, the stock manager is presented with a full report. This report contains all purchases of the customer.

The usage model is relatively simple and will only be described here.

The StockManager accesses the system with a customers id and in the end is presented with a report of all purchased products for this customer.

6.1.2. CoCoME excerpt

Before we move on to the access rights and data types, we show the excerpt of CoCoME in which this scenario takes place. This is just an excerpt of the whole system. The scenario

Figure 6.1.: The usage model for the Scenario: StockManager requests a report for a customer.

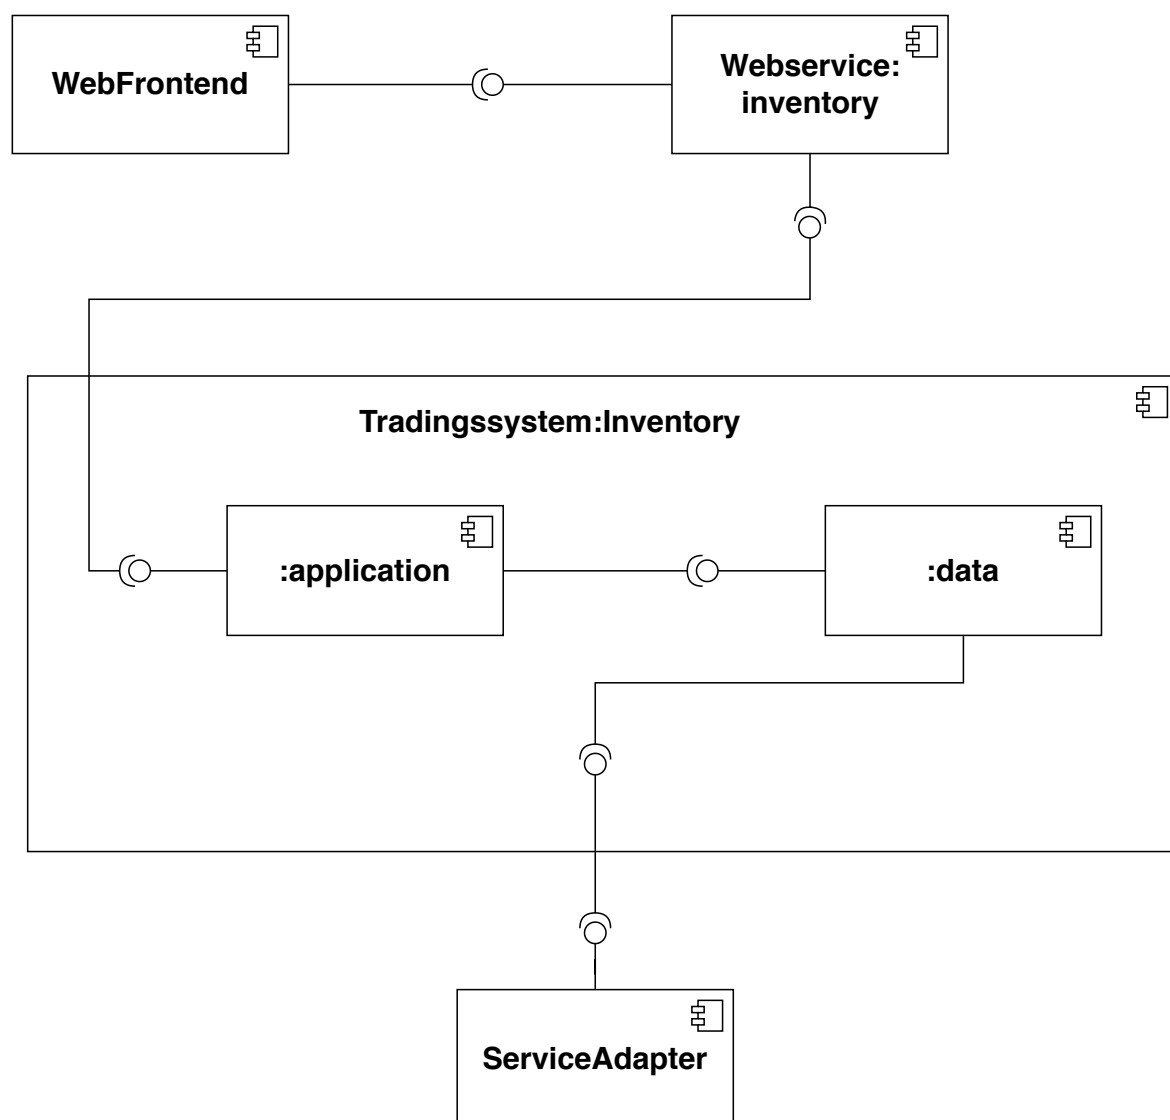


Figure 6.2.: Excerpt of CoCoME in which the described scenarios takes place.

only uses four components, the Tradingssystem:inventory:application, the Webfrontend, the Tradingssystem:inventory:data and the Webservice.

6.1.3. Data types and access rights

Previously, the data was divided into four classes. In the following enumeration the data classes and the concrete data for each class is shown.

- account related data
No data from this class is used in this scenario

ACM	Webfrontend	TS:inv:application	TS:inv:data
stockmanager	customer data : 4 account data : 3 p& s data : 2 system data: 4	account : 3 customer : 4 product & sales : 2	account : 3 Figure 6.2) customer : 4 product & sales : 2

Table 6.1.: An ACM showing the access rights for the case study system.

Types of data processing	customer data	p&s data	system data
Webfrontend	transmit	I/O operations, transmit	non-existent
TS:inv:application	alter, transmit	alter	non-existent
TS:inv:data	relational algebra	relational algebra	alter

Table 6.2.: A matrix showing the data processing for each component. the abbreviate p& s data stands for product and sales data.

- customer related data
The ID from the customer is part of the scenario
- product & sales related data
In the scenario two concrete types are used. First, the IOrderEntries type. This type is a list of all purchased products for an order. This type is a collection of all products in an order. The second type is the report, which collects all IOrderEntries in one list and transform it to a human readable document.
- system data
The system data are the queries used to request the IOrderEntries from the database.

Next, we extract the access rights and the types of data processing from the corresponding matrices. The access rights matrix for this scenario is shown in Table 6.1. We omitted the Webservice component for the fact that it only transmits the data in this scenario. The matrix for the data processing is shown in Table 6.2.

6.1.4. Component behavior

The shown excerpt is extended with SEFFs (subsection 2.3.2). For each component a SEFF is defined, which models the observable behavior for this component. First, we describe the observable behavior of the scenario across all components, then we define the data flow for each component. Finally, the data flow definitions are merged into one data flow for the entire scenario.

6.1.4.1. Observable Behavior

The ID is entered via the WebFrontend component. After that, the ID is passed through the Webservice component to the Tradingsystem:inventory. The Tradingsystem:inventory has

two inner components. First the ID is passed to the Tradingsystem:inventory:application in which it remains for the time being. Then the whole database is queried. In the next step, first the responding database entry for the ID is selected. Secondly, the received database entry is altered into a query used to select all IOrderEntries for the customer. The result is merged into a list. This data is transmitted back to the Tradingsystem:inventory:application, where the data is transformed in a report. A Report is a human readable document. Then the report is passed through the Webservice back to the Webfrontend where it is presented to the stock manager.

6.1.4.2. Data flow definition

For each SEFF one or more operations are added which describe the data processing for the component. For each operations it is defined which type of data processing is done for which data.

- Webfrontend
Transmit the ID (customer data) and the report (product& sales data).
- Tradingsystem:inventory:application
Transmits the ID (customer data), alters and transmits the report and IOrderEntries (product& sales related data).
- Tradingsystem:inventory:data
Transmits the IOrderEntries (product& sales related data), take the ID (customer data) alter it to a query (system data) and creates a new query (system data).

The different operations are added to the respective components. The resulting data flow is shown in Figure 6.3.

The data flow is as follows. The ID from the customer is transmitted to the Tradingsystem:inventory:data. Then the respective IOrderEntries are selected and merged into a report. This report is then transmitted back to the StockManager.

6.2. Scenario: Support employee requests information for an order

This scenario was not defined on the basis of an use case. After we investigated CoCoME further, we could not find any fitting use cases in which security relevant data is present. We mostly looked for use cases, that process customer related data. So we created a new scenario.

6.2.1. Description

The fundamental setting of this scenario is that a customer has a problem with an order s/he issued. To solve the problem, the customer authenticates her/himself in CoCoME and issues a ticket for the order. The support employee then request the particular order from

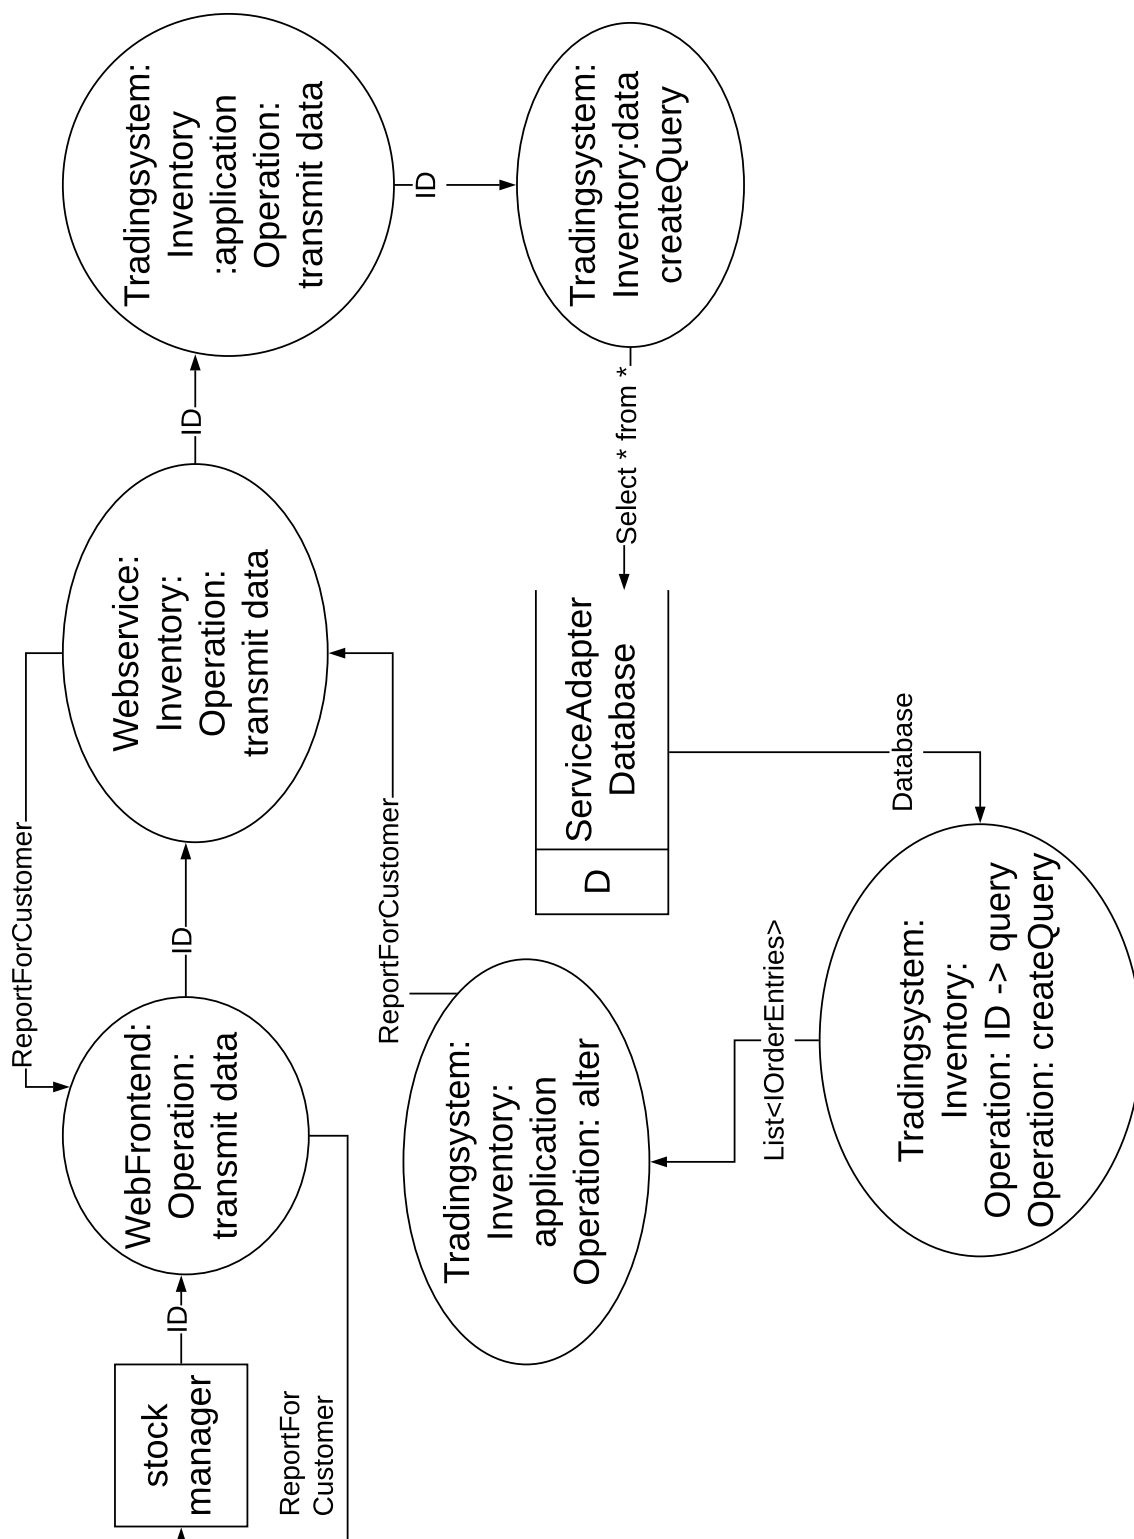


Figure 6.3.: Resulting data flow for the scenario: StockManager request the report for a customer

CoCoME. After the report is received, the scenario has ended. With the report at hand, the support employee should be able to solve the customer's issue.

The usage model is relatively simple for the scenario. The support employee request with the customer and order ID a report of the current state of the order.

6.2.2. Identification of a new use case

We found the scenario described in subsection 6.2.1 so fitting for CoCoME, that we derived a new use case from it. First we introduce the new role of support employee before we move on to the description of the new use case.

6.2.2.1. Description the new role: Support employee

The support employee role processes the tickets issued by customers. A ticket is issued if there are problems with an order. The support employee receives access to the order and checks their current status. Then he takes an appropriate action to solve the issue if possible. The actions are dependent on the actual order. They can reach from resending the order to taking no action, because the customer tries to scam the enterprise.

Role description The support employee is a new role in the system, so we had to define the access rights for this role. It requires data beyond the data it owns itself, this includes customer and product & sales related data. The role may provide customer and product & sales related data. It may happen, for example, that an order is changed, because some products are not available and the customer decides to take a similar product. Also customer may used an invalid credit card in the order under investigation and the credit card details are changed.

access rights From the description we derived the access rights shown in Table 6.2.2.1. To point out the important definitions. The support employee got no access to the Tradingsystem:cashdeskline, because for his tasks s/he does not need to. Also no access to system data as every role. At last no access to the customer related data in the PickupShop to verify , for example, the credit card details with the bank. We omitted the Tradingsystem:cashdeskline for space purposes

ACM	Web-frontend	TS: inventor:	TS:cash- deskline	Pickup Shop	Web- service
support employee	account : 2 customer : 1 product & : 2 sales system : 4	account : 2 customer : 1 product & : 2 sales system : 4	account : 4 customer : 4 product & : 4 sales system : 4	account : 4 customer : 2 product & : 4 sales system : 4	account : 2 customer : 1 product & : 2 sales system : 4

Table 6.3.: Access right for the role *Support employee*. 1 refers to the access right *FullAccess*, 2 refers to the access right *AccessToUsedData*, 3 refers to the access right *AccessToOwnedData*, 4 refers to the access right *Default*.

6.2.2.2. Description of use case 14

- *Brief Description* The system provides the possibility to generate a report for the current status of a customer's order.
- *involved actors* customer, support employee
- *Precondition* the support employee is authenticated.
- *Trigger* the customer submits a ticket for a certain order.
- *Post condition* The report for the order was generated and is displayed to the support employee.
- *Standard process*
 1. The support employee enters the customers identifier and the report identifier to create the report.
 2. The report is generated and displayed
- *Alternative or exceptional process*
 - in step 2: the order doesn't exist
The system sends an error message to the customer
 - in step 3: order is ready
the support employee sends a reminder to the customer to pick up the order

6.2.3. CoCoME excerpt

The CoCoME excerpt is the same as in section 6.1. The excerpt is shown in Figure 6.2. The scenario is settled in the same region as the previous one. So the same components are used. This are the Tradingssystem:inventory:application, the Webfrontned, the Tradingssystem:inventory:data and the Webservice.

6.2.4. Data types and access rights

We divided the data in to four classes of data types. In the following listing, for each class the concrete data is summarized.

- account related data
No account related data is used in the scenario
- customer related data
The ID of the customer is used in this scenario
- product & sales related data
Two data types are used in this scenario. First, the ID of the order, second the report type. The report which merges the an order and a customer in a human readable document.

- system data

The system data used are queries to request data from the database.

The access rights matrix for this scenario is shown in Table 6.2.2.1. We omitted the Webservice component for the fact that it only transmits the data in this scenario. The matrix for the data processing is shown in Table 6.2. It is extracted from the corresponding matrix.

6.2.5. Component behavior

The shown excerpt is extended with SEFFs (subsection 2.3.2). For each component a SEFF is defined, which models the observable behavior for this component. In the following the observable behavior of the scenario is described first, then the model extension with the described meta model. Finally, the resulting data flow is displayed.

6.2.5.1. Observable behavior

First the ID of the authenticated customer and the ID of the order are entered in the Webfrontend by the support employee. Then the tuple is transmitted through the Webservice to the Tradingssystem:inventory. The Tradingssystem:inventory consists out of two components. First, the Tradingssystem:inventory:application transmits the tuple to Tradingssystem:inventory:data, where the tuple stays for the time being. Then the whole database is selected. In the next step, a query is created by using the customer ID. Then the query is used to select the corresponding customer. Then order ID is used to build another query and select the corresponding order. The order and the customer data is passed to the Tradingssystem:inventory:application, where it is processed to create a report. This report contains meta data in addition to the ordered products. This meta data includes, for example, the day of delivery, the payment method used, etc. Then the report is transmitted via the Webservice component back to the Webfrontend. There the report is shown to the support employee.

6.2.5.2. Data flow definition

Previously, the data was divided into equivalence classes. Now we present the concrete data to be used in this scenario and specify the corresponding classes.

- Webfrontend
Transmit the (customer ID (customer data), order ID (product& sales related data)) tuple and the resulting report (product& sales related data).
- Tradingssystem:inventory:application
Transmits the tuple and alters the Customer and Order object to a report and transmits it.
- Tradingssystem:inventory:data
Transmit the Customer and Order object and takes the tuple to create two queries.

With these informations about the data processing, we are able to build the resulting data flow, which is shown in Figure 6.4.

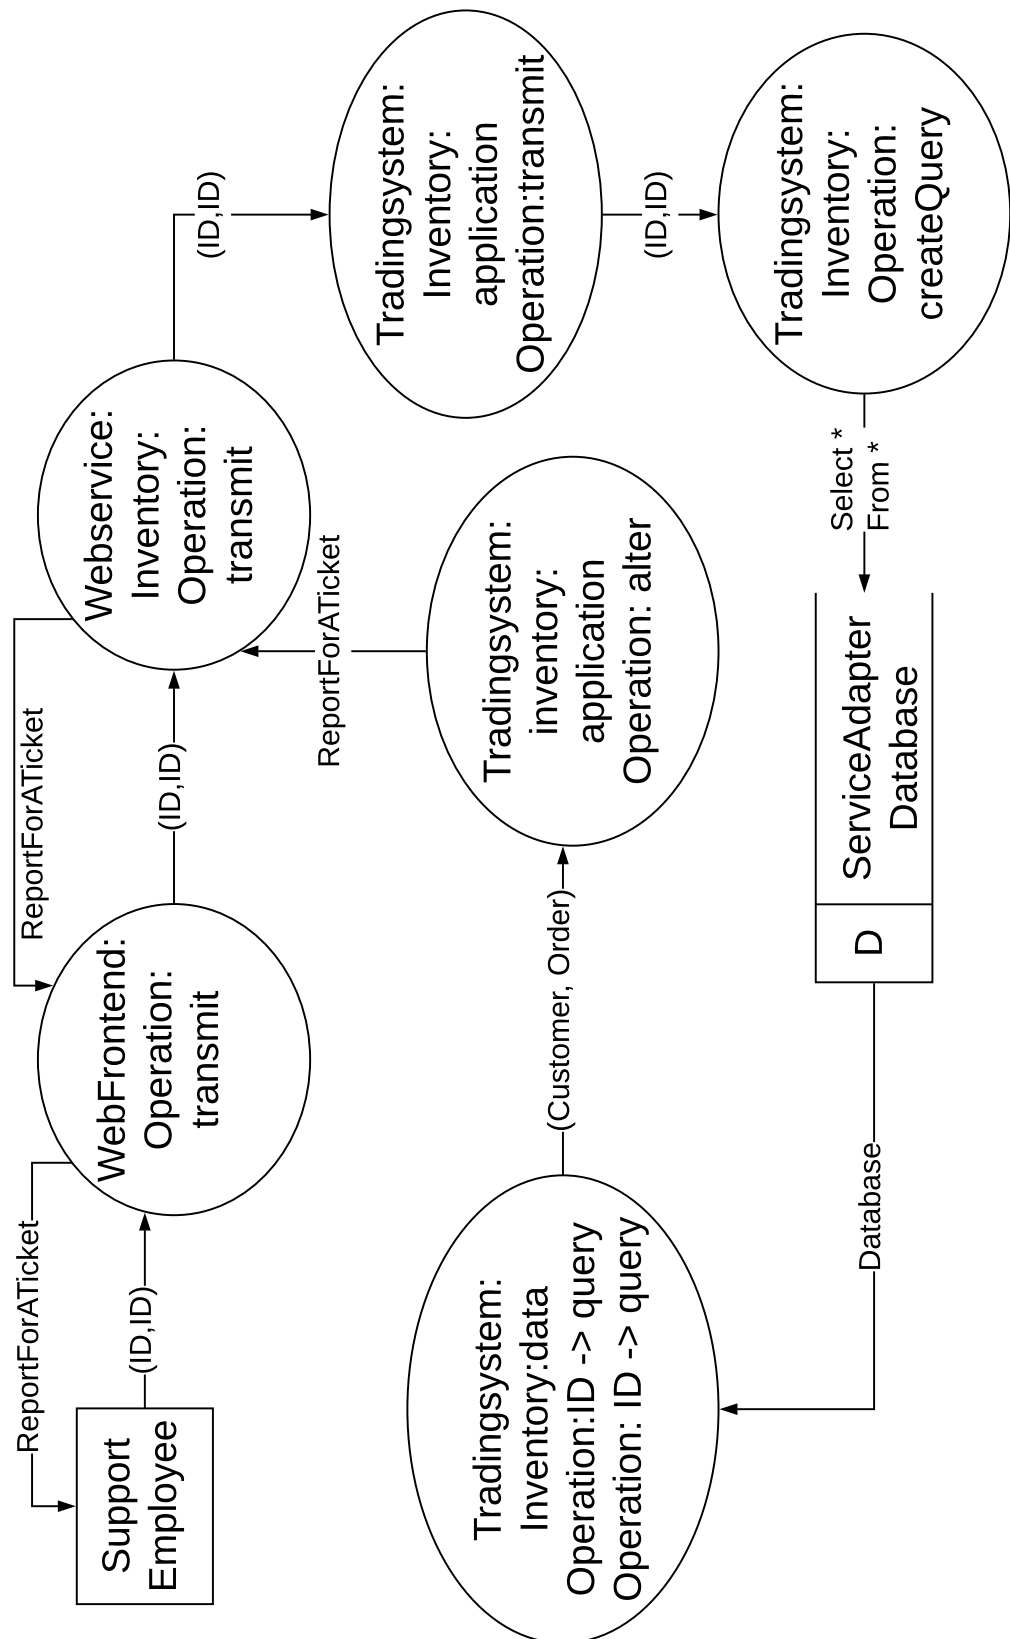


Figure 6.4.: The resulting data flow for the scenario: Support employee requests information for an order.

7. Evaluation

In this chapter, we evaluate the process to create a case on the basis of the application to the CoCoME system. Also, the created case study is evaluated. Then PCM modeling language is evaluated, if it is possible to express the created case study. At last, the results of the evaluation are discussed to conclude this chapter.

7.1. GQM plan

Three aspects of the thesis are evaluated. First, the applicability of the introduced method, secondly the usability of the created case study for data based privacy analysis and last but not least to what extent it is possible to model the created case study with PCM. Each evaluation follow a GQM plan [1], which is shown in Figure 7.1.

7.2. Applicability of the introduced method

The first aspect we want to evaluate is applicability of the introduced method for software systems. We check this so the method can be used to create further case studies.

7.2.1. Is the introduced method applicable to a concrete system

To verify if the goal is achieved, we defined the following question:

Is the method applicable for a system that models a PickupShop?

Pickupshop in this case means, that orders are placed online and picked up later by the customer. As a metric for answering the question, we take the successful application of the method to CoCoME.

7.2.1.1. Application to the CoCoME system

In the chapters chapter 5 and ??, the application of the method to CoCoME is shown. It is possible to create case study for the CoCoME. We followed the steps described in chapter Procedure and after all the steps were taken we successfully created a case study. The use to carry out data-based data protection analyses is evaluated in section 7.3. In ?? we successfully created a case study for the examined excerpt. Therefore, we concluded that the method is applicable for the reduced system.

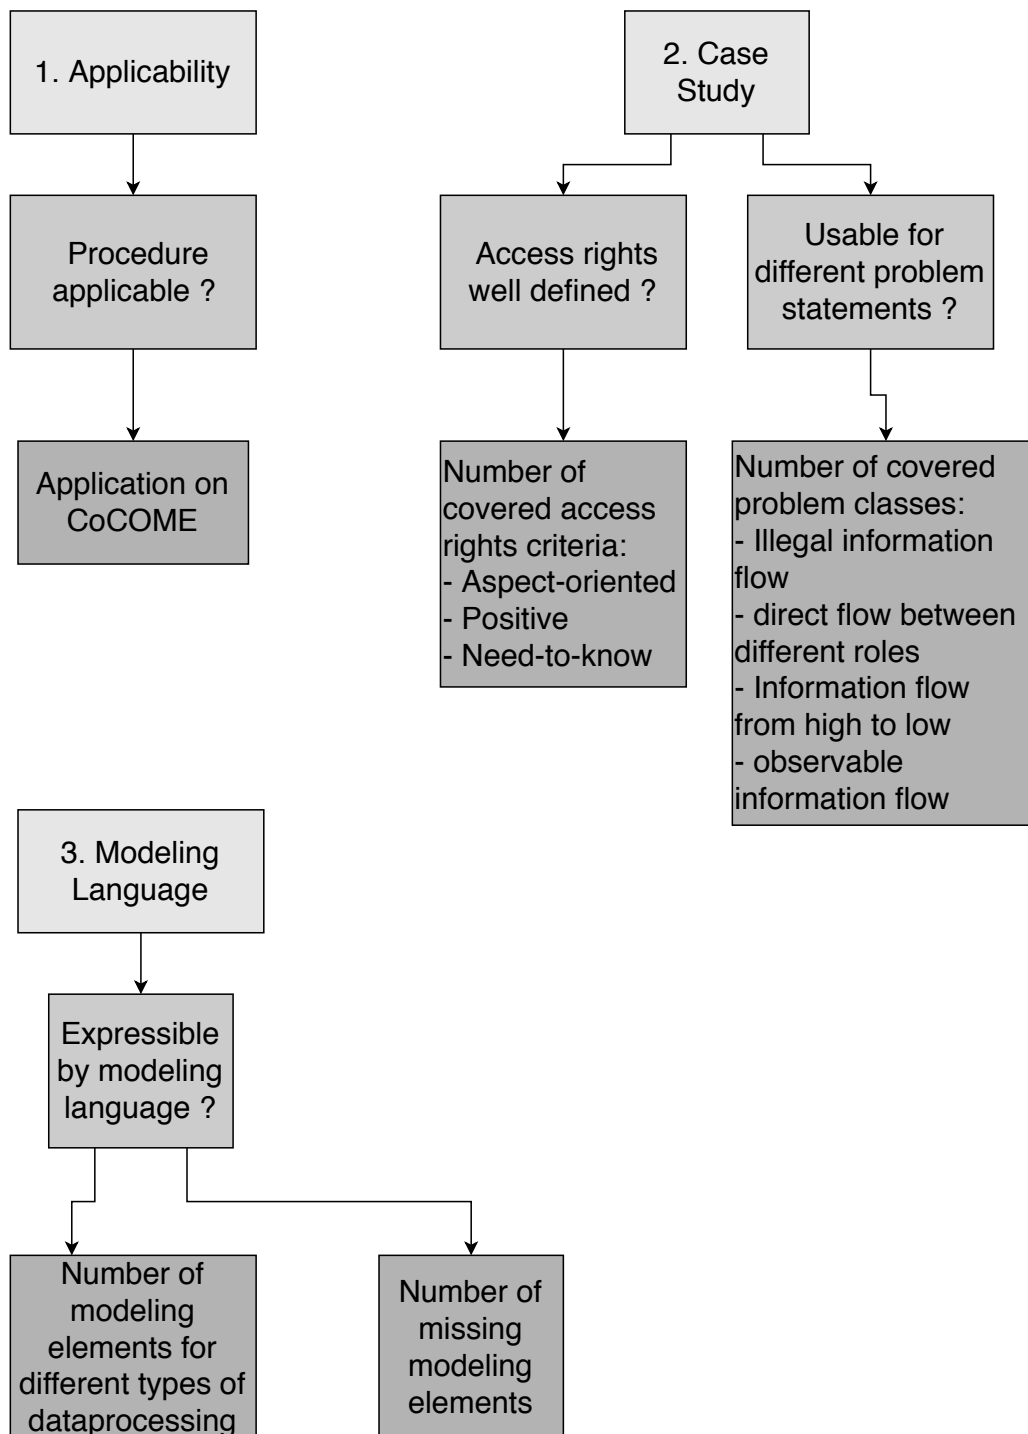


Figure 7.1.: The GQM plan for the three parts of the evaluation. Each part is divided into

7.3. Usability of the created case study for data-based privacy analysis

The next aspect we evaluated the usability of the created case study. A case study is not useful if it does not meet criteria. The criteria ensure that the case study is in a state where it can be used for data-based data privacy analysis. To ensure this, we evaluate two different parts of the case study. First, we evaluate the defined access rights, then the defined data flows.

7.3.1. Are the access rights well defined ?

Well defined access rights means in this context that the defined access rights meet the criteria defined by Evered and Bögeholz[3]. The two authors defined seven different criteria. In order to ensure clearly defined access rights, the defined criteria should be met. In our case, it is not possible to evaluate all seven criteria. This seven criteria are : Concise, clear, aspect-oriented, fundamental, positive, need-to-know and efficient. Clear and concise are omitted, because for the verification of these two criteria a survey is needed. It was also not possible to check the fundamental criterion, because it needs code to verify if the access rights are embedded in it. At last the efficient criterion also needs running code. This criterion measures the overhead that access rights cause in a system. Since the thesis is oriented on the conceptual level instead of on a code level, this criterion was not included in our scope. The three chosen criteria that we are utilizing for our evaluation are aspect-oriented, positive and need to know. The criterion aspect-oriented describes that the access rights should be separated from the code. This allows a better understanding of the code and more importantly it allows that different code is used in different contexts. The criterion positive describes, that each access to data classes must be explicitly given to a subject. The default value for access rights is no access. The criterion need-to-know describes the state of access rights where each role has just access to the absolute necessary data that is used to fulfill the tasks of the role. This criterion intends to ensure that access rights are define fine-grained. To give a simple example, a role requires the customer address to perform its tasks. Fine-grained access rights ensure that the role can only access the address data. Access to other customer data must then be restricted. The number of met criteria is the metric to answer the question. The evaluation of the access rights has to be taken with a grain of salt. Since the access rights are dependent on the security relevant data, the defined roles and the system model, the access rights needs to be reviewed each time one of the dependencies changes.

7.3.1.1. Number of satisfied criteria

The evaluation is done in a checklist manner. For each criterion the defined access rights are evaluated whether they fulfill this criterion.

Aspect-oriented The access rights are stored separately from the code and even from the data flows. The access rights are changeable in the context of the case study. This allows that a scenario may be evaluated in different security contexts. So this criterion is met

Positive The created case study achieves this criterion. First, granular access control rights have been defined. The access rights are differentiated in four different levels. We also defined a default value, which represents *no access* to data.

Need-to-know This criterion is achieved by the created case study. We split the data in four classes. For each component it is defined which role has access to which data. With this we can model, for example, that the support employee may access customer data in the Tradingsystem:inventory, but not in Tradingsystem:cashdeskline. The role doesn't need access to customer data in Tradingsystem:cashdeskline for its tasks. It is possible to model that each role only get access to the absolutely necessary data in a component. So this criteria is met.

7.3.2. Is the created case Study usable for different information flow classes?

To verify if a case study system is created that may be used to for data-based privacy analysis, we evaluated as a second aspect, the defined data flows. The following question is defined to indicate whether the goal is reached:

Is the created case study usable for different problem statements?

In the evaluation we only check the problem statement *Non-influence* [8]. Non-influence combines two sub problem statements, *Non-interference* and *Non-leakage*. Non-inference describes that no role may acquire informations from a role that inherits a higher security level. Non-leakage describes the issue that it is not observable what specific actions are performed by a system. All in all the problem statements comes down to different classes of information flow. So we use the different information flow classes as a metric to verify the question. This is done in a checklist manner.

7.3.2.1. Number of different covered information flow classes

We evaluate the variety of covered information flow classes for the defined scenarios in the case study. We defined four information flow classes to cover non-interference and non-leakage. The covered information flow classes are: Illegal information flow, information flow from higher security levels to lower ones, observable information flow and direct informations flow between roles.

- **Illegal information flow**
This class includes the information flow of data to roles that have no access to data of this type.
- **Information flow from higher security levels to lower ones**
In the thesis, we use data flows as the main source of informations. The data is altered with specific operations. So our definition for information flow from high to low is: a sequence of actions, so that is possible for a role that inherit a certain security level to get access to data that are only accessible by higher security levels.
- **Observable information flow**
This class describes if the data flow are observable from the outside and to determine,

for example, if a security relevant operation is performed. The acquired informations may be used for an attack on the system.

- **Direct information flow between roles**
This information flow class models data flow between two roles while both interact simultaneously with a system. This refers especially to the security relevant data that may be transferred between two roles with different security levels.

Illegal information flow The first scenario model illegal data flow. The stock manager in this scenario has access to the ID of an customer. the role has no rights to have access customer related data. Then, the stock manager request a report of this specific customer and receives a full report for this customer. The stock manager has the security level *AccessToUSedData*. The report for one customer is no necessary data for the stock manager to perform its tasks. In this scenario an illegal data flow is modeled. Therefore, the illegal data flow class is part of the created case study.

Information flow from higher security levels to lower ones For each data type in each component the access for each role is regulated, therefore it is possible that the security levels change. To check if the information flow is in place, we have analyzed the data flows to determine if a role within the data flow is accessing unauthorized data.

Observable information flow We did not change the base system of CoCoME. In the base system of CoCoME it is possible to observe when, for example, users finish authenticating, because they are then allowed to perform different actions. So this information flow class is not modeled in a scenario.

Direct information flow between roles For the fact that no scenario with more than one role is defined, this class is also not covered in the case study.

7.4. Expressiveness of data centric PCM

The last evaluation aspect of this thesis is to evaluate the chosen modeling language, in this case data-centric PCM. We want to check to what extent PCM is able to add the access rights and data flows in the already existing system model. To allow the extension, Seifermann [14] provided a meta model extension. This meta model extension is the central point of the evaluation. Without the meta model extension, PCM is not able to store data flows and access control rights directly in a system model.

7.4.1. Is the created case study expressible with PCM ?

A as metric to verify if the, we use the created case study and check if all operations for the different types of data are expressible by PCM. Also we check if elements for types of data processing are missing. The metric is done in a checklist manner.

7.4.1.1. Number of available elements to model the different types of data processing

First we measure in what current state the operations of the meta model extension are in. We identified five types of data processing that are needed to express the data flows. Currently twelve operations are available in the meta model extension. We measure which operation express the which type of data processing.

Operations relational algebra This type of data processing describes the manipulation of database or data requested from databases. The operations for this are available in the meta model.

I/O- operations This type of data processing describes an I/O operation in the data flow, where a user receives data and inputs the same or an other data type in the system. An operation for this is available.

Transmission data This data type describes if component transmit types of data. An operation for this available in the meta model extension.

Change Access rights In the course of a data flow it may happen, that the access right level of a data type changes. For this case an operation in the meta model extension is available. This mostly happens when an operation changes the type of data. This type of processing is closely related to the next one described.

Alternation of data This is a larger type of operations. All in all, this type describes the alternation of data. This includes creation of data, merging many points in , for example, into list or set. Also the splitting data, like lists, in the different data points. This type of data processing describes the contrasting operation to merging data in collections.

7.4.2. Number of missing elements for the different

An element for modeling the ACM in the system model is missing.

7.5. Discussion

After all the evaluations are conducted, we discuss the findings. This discussion will be divided into three parts. Each parts covers one of the evaluation aspects shown in Figure 7.1.

We were able to verify that the method is applicable to a system that models a pickup shop. The method should also be applied to other systems. Possible other systems are flight booking systems, food suppliers, etc. The weakness in this part of the evaluation is that the method has not been applied often enough to different systems to make a statement about its applicability.

In the next part, the evaluation results of the access rights and data flows are discussed. First, the defined access rights in the case study. We evaluated based on predefined criteria

Access Rights	fulfilled ?
Aspect-oriented	yes
Positive	yes
Need-to-know	yes

Table 7.1.: Overview of the evaluation result for the access rights.

Data flow	fulfilled
Illegal information flow	yes
Information flow from high to low	yes
Observable information flow	no
Direct information flow between roles	no

Table 7.2.: Overview over the evaluation result for the data flows.

by Evered and Bögeholz [3] the access rights. Not all criteria were applicable to the case study, because for some criteria one need running code which is not in the scope of the case study. Other criteria weren't applicable due to time constraints. All in all, as shown in Table 7.1, we achieved with our definition of the access rights all three criteria. There is surely some work to be done to allow to check more criteria, like conducting a survey for the criteria clear and concise. For the criteria fundamental and efficient a deployment of CoCoME which includes the access rights is needed. The evaluation of the access rights has to be taken with a grain of salt. Since the access rights depend on the security-relevant data and the roles defined in the system, they must be reevaluated if something has changed. The evaluation is therefore only a snapshot of the current quality of the access rights. Next, we discuss the evaluation for the different covered information flow classes. We achieved to cover two of the four information flow classes, which is a pretty solid. As we see it, the desirable state is to cover all information flow classes in width and depth. Width means that at least each class is covered by at least one data flow. Depth means that for each class a data flow is defined that is illegal for the class and one that it is not. As shown in Table 7.2, we only cover two information flow classes. At last we discuss the results for our modeling language PCM. We defined five types of data processing and evaluated whether they are possible to model in PCM. The result is shown in Table 7.3. As shown, all types of data processing are modeled. Therefore, we conclude it is be possible to model all created case studies with PCM. But it is not possible to store the ACM in the same model.

To conclude the evaluation, one can say that we introduced an applicable method for a certain type of systems to create data flows for a data-based privacy analysis. For the sample case study, we say it is a proof-of-concept, because only two class of information are modeled. The defined access rights are well defined in the current evaluation, but it is imperative to apply the other criteria to get a more complete picture. It must also be said that access rights are relatively volatile, as there is a need to check even small changes in the system. At last, the used modeling language is able to model all types of data processing and is therefore usable for data-based privacy analysis. The only throwback

Meta model	possible ?
relational algebra	yes
I/O operations	yes
Transmission of data	yes
Change of access rights	yes
Alternation of data	yes
ACM in system model	no

Table 7.3.: Overview over the results for the evaluation of PCM.

for the modeling language is that the ACM must be stored separately, this may lead to inconsistency and should be fixed soon.

8. Related work

After the contributions of the thesis have been evaluated, they are placed in the context of related works. First, it has to be said that related work for the kind of case study we created was hard to find. Case studies are an acknowledged procedure mainly in the fields of sociology, philosophy, law, etc. For this fields, the case study method is documented well. The type of case study that we are going to create shows some similarities with case studies that were created in the previously mentioned fields. Nevertheless, the discrepancy between computer science and the classical fields for case studies, is too great. Only fundamental methods could be adopted by the method. Such methods includes, for example, to use two sources of data [16]. In the field of computer science, case studies are mostly used to give an overview of certain topics, e.g. how different challenges in software engineering were tackled. Sometimes there are used to verify the applicability of different approaches, like UMLSec [5]. The only publication that roughly outlines the creation a case study for a software system, was the one from Evered and Bögeholz [3]. In this publication, the both authors describe briefly the creation of a case study on a much smaller system than we performed our case study on. The main goal of their publication was to define good access rights in component based systems by using their structure. We have adopted the introduced criteria of Evered and Bögeholz [3] and have included them in our evaluation as a measurement for good access rights. Further, the author described briefly the creation of a case study. In their publication, the defined first the data than the access rights and then went right to evaluation. In their work this was enough because the main aim of their work was to evaluate the different types how access rights may be added to a running system. In contrast to Evered and Bögeholz, the aim for our case study was to be used in a data-based privacy analysis. Therefore we used their approach as a basis for ours. We require a specific system model and the existence or the deductibility of use cases to ease up the later validation. Further, in contrast to Evered and Bögeholz, we want to use the created case study in another setting. Therefore we added the definition of scenarios and the definition of the type of data processing for each component and each role. All in all, we say that Evered and Bögeholz have given us a good starting point for our method and we have expanded theirs.

We lloked further but could not find any other fitting publications that may address our matter. We found a lot publications that adresses different case studies but none with the same or similar aim as our method.

9. Conclusion and future work

In this chapter, we first draw a conclusion for the thesis. Then, we discuss in which cases our work can be used and lastly, we discuss the future work for each aspect of the evaluation.

9.1. Conclusion

In this thesis, we presented a method to create case studies for a data-based privacy analysis. To allow such analyses, we defined data flows for a system. Further, we created a process to create case studies from software systems and applied the method to CoCoME. While in the process of application to CoCoME, we found vagueness in CoCoME. This vagueness does not happen by accident. Another benefit of the method, beside the creation of a case study, is to detect vague definitions and add definitions for them. First of all, the roles were rather well defined, but missed the last bit of precision. For example, the role of StockManager was mentioned, but there were too few use cases to derive tasks and provided/required data. Also for some data used in CoCoME exact definitions were missing. After we added the definitions, data flows that describe the data processing were created. Further, we define a new use case (UC14) for CoCoME. The UC14 introduces a new role, the support employee. When a user encounter problems with an order they can issue a ticket. The support employee handles the tickets to solve the problem. Then we evaluated the created case study based on two aspects. First, the quality of the defined access rights, secondly, the number of different information flow classes covered. The created case study covers 50% of the investigated information flow classes. We then validated the method described through the application to CoCoME. We have found that the method is applicable to CoCoME, but still needs to be applied to other component-based systems. section 9.3 goes into more detail on which types of systems the method should be applied. At last we evaluated the used modeling language PCM [11]. We used a meta model extension to add the data flows to the system model. The meta model extension allows the modeling of data flows, but misses an element to store the ACM in the same model. At last, CoCoME was not the perfect system for this thesis. First of all, CoCoME is in constant development and therefore is more a proof of concept than a full system. Further, before the addition of the PickupShop, CoCoME was a closed system with a finite number of users. With the addition, CoCoME became an open system, therefore we chose the PickupShop as our system to perform the procedure on.

9.2. Benefits of our work

The main goal of the thesis was to introduce a method to create case studies that may be used to evaluate approaches for privacy analyses on an architectural level. More specific, we aimed to create case studies that can be used by data-based privacy analyses for validation. The created sample case study is a ready-to-go case study on which an data-based privacy analyses approach may be tested. Ready-to-go means that the case study may not be perfect but may be used to evaluate data-based privacy analysis approaches in the current state. Further, we provided evaluation criteria to measure the quality of the created case study. The main benefit of this work is to have a process for transforming software systems to perform a data-based data privacy analysis. The process benefits motivated software architects, who want to perform a data-based privacy analysis in an early stage of the design process to ensure compliance for the system.

9.3. Future work

This section presents possible approaches for future work. The discussion of future work will be divided into the three main aspects of the thesis: the method for creating a case study, the resulting case study and its evaluation, and at last the used modeling language PCM..

9.3.1. Method

In the case of the method, we validated the applicability for CoCoME. The next logical step is to apply the described method to other systems to verify the applicability. CoCoME sells products, either via the PickupShop or a cash desk. Possible system to apply the method are systems which also handles a warehouse and/or ships the product to the customer. It would also be conceivable to apply the method to systems away from the supermarket scenario, for example, a flight booking system.

9.3.2. Case study system

For the case study, we decided to divide the future work in a short term and a long term work.

As short term work, one should define more scenarios. First, to cover all defined information flow classes. Also for each information flow class, one should define more scenarios to allow a more deep analysis. Another possible approach for the future work is the analysis of access rights according to various criteria not yet covered. We could not cover, for example, fundamental and efficient. As future work, we propose to include access rights in the current implementation. This makes it possible to check whether the access rights have been added directly in the code and whether the checks of the access rights do not cause too much overhead. The remaining access rights were not checked due to time constraints and the lack of running code with built-in access rights.

As a long-term work, we propose to perform analysis for the created case study in this

thesis. One should define more not yet covered information classes . These additional information classes are added to allow a wider spread more in depth evaluation. Another possibility is to analyze the case study created in this thesis by using it to validate a data-based approach privacy analysis approach. The cases for additions or developments are not dealt with in this thesis.

9.3.3. Meta model extension

As future work, we propose to extend the meta model of PCM even further to allow the storage of the ACM in the same model.

Bibliography

- [1] Victor R. Basili and David M. Weiss. “A Methodology for Collecting Valid Software Engineering Data”. In: *IEEE Trans. Software Eng.* 10.6 (1984), pp. 728–738. DOI: 10.1109/TSE.1984.5010301. URL: <https://doi.org/10.1109/TSE.1984.5010301>.
- [2] Jakub Breier. “Asset Valuation Method for Dependent Entities”. In: *J. Internet Serv. Inf. Secur.* 4.3 (2014), pp. 72–81. URL: <http://isyou.info/jisis/vol4/no3/jisis-2014-vol4-no3-05.pdf>.
- [3] Mark Evered and Serge Bögeholz. “A Case Study in Access Control Requirements for a Health Information System”. In: *ACSW Frontiers 2004, 2004 ACSW Workshops - the Australasian Information Security Workshop (AISW2004), the Australasian Workshop on Data Mining and Web Intelligence (DMWI2004), and the Australasian Workshop on Software Internationalisation (AWSI2004)*. Dunedin, New Zealand, January 2004. 2004, pp. 53–61. URL: <http://crpit.com/confpapers/CRPITV32Evered.pdf>.
- [4] Robert Heinrich, Kiana Rostami, and Ralf Reussner. “The CoCoME Platform for Collaborative Empirical Research on Information System Evolution”. In: (2016).
- [5] Jan Jürjens. “Model-based Security Testing Using UMLsec: A Case Study”. In: *Electr. Notes Theor. Comput. Sci.* 220.1 (2008), pp. 93–104. DOI: 10.1016/j.entcs.2008.11.008. URL: <https://doi.org/10.1016/j.entcs.2008.11.008>.
- [6] Jan Jürjens. “UMLsec: Extending UML for Secure Systems Development”. In: *UML 2002 - The Unified Modeling Language, 5th International Conference, Dresden, Germany, September 30 - October 4, 2002, Proceedings*. 2002, pp. 412–425. DOI: 10.1007/3-540-45800-X_32. URL: https://doi.org/10.1007/3-540-45800-X_32.
- [7] Torsten Lodderstedt, David A. Basin, and Jürgen Doser. “SecureUML: A UML-Based Modeling Language for Model-Driven Security”. In: *UML 2002 - The Unified Modeling Language, 5th International Conference, Dresden, Germany, September 30 - October 4, 2002, Proceedings*. 2002, pp. 426–441. DOI: 10.1007/3-540-45800-X_33. URL: https://doi.org/10.1007/3-540-45800-X_33.
- [8] David von Oheimb. “Information Flow Control Revisited: Noninfluence = Non-interference + Nonleakage”. In: *Computer Security - ESORICS 2004, 9th European Symposium on Research Computer Security, Sophia Antipolis, France, September 13-15, 2004, Proceedings*. 2004, pp. 225–243. DOI: 10.1007/978-3-540-30108-0_14. URL: https://doi.org/10.1007/978-3-540-30108-0_14.
- [9] Roman Pilipchuk, Stephan Seifermann, and Emre Taspolatoglu. “Defining a Security-Oriented Evolution Scenario for the CoCoME Case Study”. In: *4nd Collaborative Workshop on Evolution and Maintenance of Long-Living Software Systems (EMLS’17)*. Vol. 37. Softwaretechnik Trends 2. 2017, pp. 60–77.

- [10] Andreas Rausch et al., eds. *The Common Component Modeling Example: Comparing Software Component Models [result from the Dagstuhl research seminar for CoCoME, August 1-3, 2007]*. Vol. 5153. Lecture Notes in Computer Science. Springer, 2008, pp. 16–53. ISBN: 978-3-540-85288-9. DOI: 10.1007/978-3-540-85289-6. URL: <https://doi.org/10.1007/978-3-540-85289-6>.
- [11] Ralf Reussner et al. *The Palladio Component Model*. Tech. rep. 14. 2011. 193 pp.
- [12] Per Runeson and Martin Höst. “Guidelines for conducting and reporting case study research in software engineering”. In: *Empirical Software Engineering* 14.2 (2009), pp. 131–164. DOI: 10.1007/s10664-008-9102-8. URL: <https://doi.org/10.1007/s10664-008-9102-8>.
- [13] Stephan Seifermann. “Architectural Data Flow Analysis”. In: *13th Working IEEE/IFIP Conference on Software Architecture, WICSA 2016, Venice, Italy, April 5-8, 2016*. 2016, pp. 270–271. DOI: 10.1109/WICSA.2016.49. URL: <https://doi.org/10.1109/WICSA.2016.49>.
- [14] Stephan Seifermann. *PCM-DataProcessing-Metamodel*. <https://github.com/seiferma/PCM-DataProcessing-MetaModel>. 2018.
- [15] Bart van der Sloot. “Where is the Harm in a Privacy Violation? Calculating the Damages Afforded in Privacy Cases by the European Court of Human Rights”. In: *JIPITEC* 8.4 (2017), pp. 322–351. ISSN: 2190-3387. URL: <http://nbn-resolving.de/urn:nbn:de:0009-29-46414> (visited on 09/13/2018).
- [16] Donna M. Zucker. “How to Do Case Study Research”. In: *Teaching Research Methods in the Social Sciences* (2009).

A. Appendix

A.1. First Appendix Section

Github URL for PCM models for the defined scenarios.

- **stock manager requests the report for a customer**

Github URL: https://github.com/julhin/DataProcessing/tree/dataprocessing_withoutAssemble

- **Support employee requests information for an order**

Github URL: <https://github.com/julhin/ModelsUC14>