



Gimmal Link Installation and Administration Guide

Software Version 5.7.0

November 2021

1 Introduction

The Gimmel Link Suite for SharePoint® and SAP is a leading provider of SAP-Microsoft interoperability solutions that enable Microsoft SharePoint as the records management/enterprise content management/document management (RM/ECM/DM) system for SAP customers. The suite includes the following components:

- **Gimmel Link Document Manager**

The SAP-certified Gimmel Link Document Manager platform creates transparency between SAP and Microsoft SharePoint so that businesses are free to define the way they want to work—inside SAP, inside SharePoint, or both—which lets businesses run better. It can leverage Archive Link, Generic Object Services (GOS), Document Management Service (DMS), or Business Document Service (BDS) to allow for archival and retrieval of content directly from the SAP interface.

- **Configuration Service**

Included with the Gimmel Link Document Manager, the **Configuration Service** provides a centralized location for the management of Gimmel Link settings. The Configuration Service is deployed as an application during the Gimmel Link installation, and it enables you to configure settings for all Gimmel Link operations from within the Gimmel Link Administration Console.

- **Gimmel Link Document Service Modules**

The Gimmel Link Document Service Modules add functionality to the Gimmel Link Document Manager platform for archiving documents against SAP business objects. They enable integration between SAP business object instances and documents archived in SharePoint. Document Service Modules process documents stored in an SAP content repository, implemented in SharePoint by Document Manager. Specifically, the Gimmel Link Document Service Modules perform the following functions:

- **Auto.index** extracts metadata from SAP for the business object that the document is attached to and adds the metadata to the SharePoint fields for the document. It can also move documents to various SharePoint locations based on metadata value-driven routing rules.
 - **Auto.index Update** is a notification system for Auto.index that SAP can invoke to implement changes on SAP objects to the SharePoint documents that are linked to them. This capability allows automatic synchronization of metadata as data associated with business object changes.
 - **Scan.link** invokes appropriate SAP actions when a document is dropped and/or indexed in a pre-configured SharePoint document library. SAP actions available include the following:

- Linking documents to SAP business objects, using the object IDs or bar codes
- Invoking and linking documents to an SAP workflow
- Interacting with remote SAP function modules

- **Connector Service**

The Connector Service enables inbound communications from applications written for the .NET platform to communicate with Advanced Business Application Programs (ABAPs). All communications between SAP and any .NET applications are managed by the Connector Service.

- **Gimmel Document Tracking Service**

The Document Tracking Service tracks the location of a document throughout the document lifecycle. The service supports data management in on-premise and cloudbased storage models.

1.1 Who Should Read this Guide

The intended audience for this document is an Gimmel Link administrator. The administrator must install and configure the environment according to the steps in this guide.

1.2 What is Included in this Guide

This guide contains information on how to install and configure the Gimmel Link Suite components, including the Configuration Service, the Connector Service, Gimmel Link Enterprise, and the Document Tracking Service.

2 Prerequisites

This chapter lists the prerequisites, such as software, configuration, and data, required before you can install and configure the Gimmel Link Suite.

2.1 Prerequisite Software and Configuration

To install and configure Gimmel Link, you need the following software and/or configuration at a minimum:

- SharePoint installed and functional (i.e., **SharePoint 2013/2016/2019/SharePoint Client Components version 15**) (**Note:** If Gimmel Link is deployed to SharePoint Online (Office365), no SharePoint on-premise environment is required.)
- SQL Server version 2012 or later
- Internet Information Services (IIS) version 7 or higher
- SharePoint Site Collection
- SAP .Net Connector 3.0. To access the installation files, see the SAP Service Marketplace at <http://service.sap.com/connectors>. Be sure to install the assemblies to GAC.

2.2 Gimmel Link Component Dependencies

Each Gimmel Link component has dependencies that must be met in order to deploy the component properly. When you begin the installation process (described in Chapter 3 [Installing or Upgrading Gimmel Link](#)), refer to the following table to ensure that each product's dependencies have been addressed.

Dependencies								
		Configuration Service	SAP Connector	SQL (Sql Native Client)	Sharepoint (13/16/O365)	DM/DSM	CS	DTS
Component	Configuration Service (CFG SVC)			X				
	ERP-Link Enterprise (Local) (DM/DSM)	X			X		X	
	Connector Service (CS)	X	X					
	Document Tracking Service (DTS)			X	X			

Figure 2-1 Product Installation Dependencies

2.3 Prerequisite Sites

During the installation process, the Gimmel Link installer prompts you to either specify an existing Internet Information Services (IIS) site OR create a new IIS site to which to deploy the Gimmel Link Enterprise, Configuration Service, and Connector Service. Each of these services is deployed as an IIS Web application in the IIS Web site that was created/selected.

Gimmel recommends that you create a dedicated IIS Website and application pool to deploy each of these services. A single application pool can be used for all services or a separate application pool can be created for each service for increased application isolation.

To create a new IIS website using the IIS Manager, follow these steps:

1. In IIS Manager, right-click the **Sites** node to open the context menu.

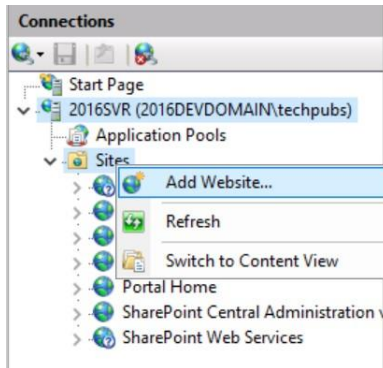


Figure 2-2 Context Menu for Sites in IIS Manager

2. Select **Add Website**. The **Add Website** dialog box displays.

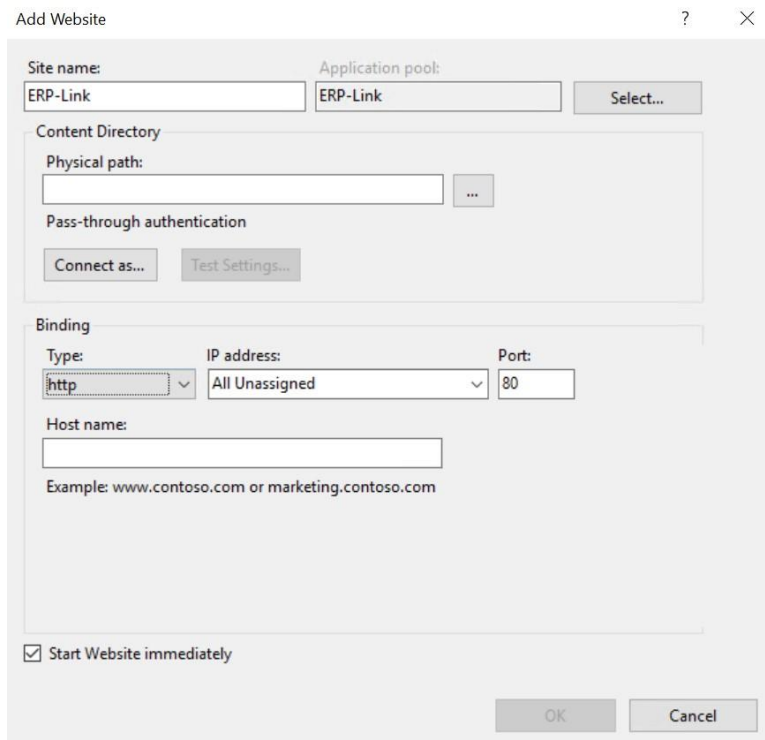


Figure 2-3 Add Website Dialog Box

3. Enter the **Site name** and **Physical path** on the server to host the Web site files, or click the **Browse** button (...) to browse to the location.

Note:

Be sure you have set up empty folders according to the path listed in the previous step so that the websites can be created.

4. In the **Pass-through authentication** section, click the **Connect as** button to display the **Connect As** dialog box.

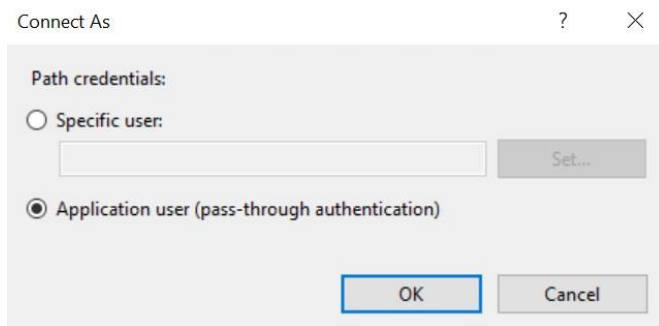


Figure 2-4 Context Menu for Sites in IIS Manager

5. Verify that the **Application user (pass-through authentication)** radio button is selected.
6. Click **OK** to save the setting and close the dialog button.
-or-
Click **Cancel** to close the dialog box without saving.
7. In the **Add Website** dialog box, configure **Bindings** for the web site.
8. Specify a **Port** and **Host name**, if applicable.
9. Click **OK** to create the IIS Website.
10. Repeat Steps 1 to 9 for each new IIS Website.

2.4 Prerequisite SAP Configuration Data

You need the following details about the configuration of the SAP system:

- o SAP dialog user account for configuration purposes: The Gimmel team can perform the SAP configurations together with the client's SAP team member's account in a joint screen sharing session; for example, using Skype.

- ASAP account access to RFC Create (SM59) and ArchiveLink administrator access; that is, access to the following t-codes: OAC0, OAC2, OAC3, OAA3, OAAD.
- Account for the Gimmel Connection Service or service such as CPIC: SAP account created
- that will be configured in the Gimmel Link administration console.
- SAP content repositories are identified.
- SAP object types are identified.
- SAP document types are identified.

2.4.1 Auto.index Update Transaction Codes

The following SAP transaction codes are needed for the optimal solution setup for Auto.index Update, which is included in the Gimmel Link Document Service Modules:

- SWEL: Display Event Trace
- SWUE: Trigger an event
- SWU0: Simulate event
- SWETYPV: Display/Maint. Event Type Linkages
- FTC_DIS: Display Tasks
- PFTC_INS: Create Tasks
- PFTC_CHG: Change Tasks
- WO2: BOR Browser
- SE37: ABAP Function Modules
- SE16: Data Browser

2.4.2 SAPGUI Clients

- SAPGUI client software SAPGUI 7.1 patch level or higher

Because of a bug in SAP's 7.0 and 7.1 SAPGUI clients, the SAPGUI client software SAPGUI 7.1 patch level or higher is required. See SAP Note #1327343 ("400 Bad Request Error with latest version of SAPHTTP".)

2.5 System Administrator Access Prerequisites (non-SAP)

You need the system administrator access prerequisites listed in this section for non-SAP installation.

2.5.1 Core Admin Requirements

- SSOM on-premises
 - SharePoint Site Collection(s) administrator
 - Local Windows server administrator access
 - SharePoint farm administrator for creating new SharePoint web applications and site collections
- CSOM on-premises
 - SharePoint site collection(s) administrator
 - Database administrator
- Local Windows server administrator access
- SharePoint farm administrator for:
 - Creating new SharePoint web applications and site collections
 - Installing and managing SharePoint Add-ins (*Apps*) in the SharePoint App Catalog (If using CSOM Certificate-Based Authentication)
- CSOM SaaS (Software as a Service; for example, O365 SP Online)
 - SharePoint site collection(s) administrator
 - Database administrator
 - Local Windows server administrator access
 - SharePoint tenancy administrator for installing and managing SharePoint add-ins (*Apps*) in the SharePoint App Catalog.

2.5.2 Optional Admin Requirements

- Database administrator permissions for creating the Document Tracking Database and executing scripts to create the Document Tracking Service table
- A server administrator for CloudGate Failover Service (CFS) for all CSOM deployments
This administrator is only needed when the optional CFS feature is enabled and the failover files are NOT stored locally on the Gimmel Link CloudGate server's file system but rather on a network file share.

2.6 Network Communications Prerequisites

This section details the network communications prerequisites for installing Gimmel Link.

2.6.1 Connection Service

The following network ports are used with the Gimmel Link Connection Service. Although the Gimmel Link Connection Service supports bidirectional communication, it is more often used for communication from Gimmel Link residing on SharePoint (SSOM) or CloudGate (CSOM) to SAP.

- Port between Gimmel Link iNet applications and the Gimmel Link Connection Service hub
 - Default: 3701 (no mandatory or preferred range)
 - Port configurable during the initial install procedure, with any port number if it does not collide with existing port assignments
 - To change the port after installation, uninstall the Gimmel Link Connection Service software; then select a different port during the pre-install preparation and reinstall it.
- Port for inbound SAP RFC (Gimmel Link Connection Service to SAP) communication ranges from 3300 to 3398
- Port for outbound SAP to the Gimmel Link Connection Service hub is default by industry standards = 514
- SAP .NET Connector 3.0
- Browsing service uses the fixed UDP 40001 port. This port is used by the Gimmel Link Connection Service hub for broadcasting to listening browsing service clients.

2.6.2 Gimmel Link

- Network access for SAP Server:

SAP server must have network access via the appropriate HTTP(S) port to the GimmelLink server. If host headers are to be used to route traffic to the Gimmel Link server via hostname, SAP must have the necessary HOST entries added beforehand.

Note: Typically, port 80 is used for HTTP and port 443 is used for HTTPS.

2.6.3 CSOM Remote Deployments

The following graphic explains the client-side object model (CSOM) remote deployment.

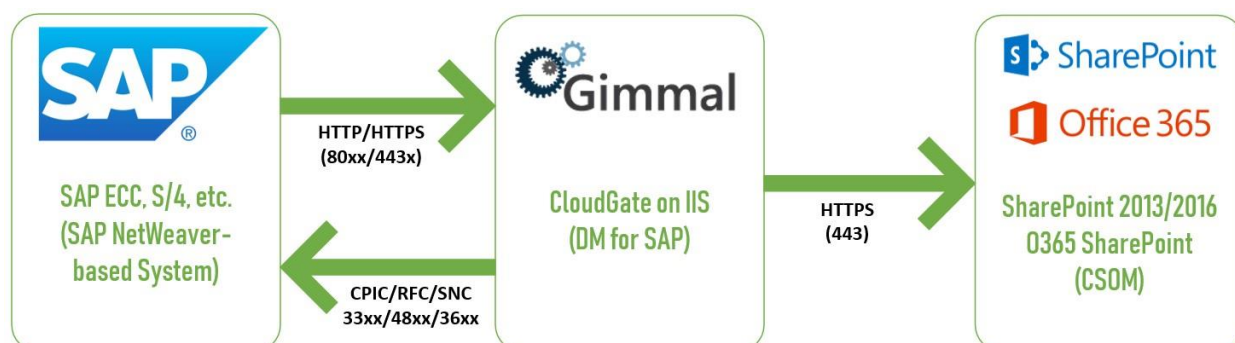


Figure 2-5 CSOM Deployment Model

2.6.4 Security Certificates

To enable encrypted network communications, security certificates must be deployed when SSL is used between the SAP system and the Gimmel Link CloudGate server (CSOM deployments) or between the SAP system and the SharePoint Web Front End server (SSOM deployments.)

2.7 SharePoint Prerequisites

See Appendix [D Information Architecture](#) for more information.

2.8 Gimmel Link CSOM Deployment Prerequisites

This section lists the requirements for Gimmel Link CSOM Deployment Prerequisites.

2.8.1 Software Requirements

Gimmel Link Software

- SharePoint app (If using CSOM Claims-Based or CSOM Certificate-Based authentication)
Gimmel Link 5.7:
 - Includes Gimmel Link Administration
 - Console Includes Gimmel Link Configuration Service
- Gimmel Link iNet.Runtime 5.0 or higher (installed with Gimmel Link 5.7)
- Gimmel App Installer 5.1
- Gimmel Connection Service 5.7 (installed with Gimmel Link 5.7) Gimmel Document Tracking Service 5.7 (installed with Gimmel Link 5.7)

Server Software Requirements

- Microsoft Windows Server 2012 or higher
- Microsoft SQL Server 2012 or higher
- SAP .NET Connector
- .NET Framework V3.5 for the Gimmel Link Connection Service and Gimmel Document Tracking Service
- .NET Framework V4.8 or higher for Gimmel Link Document Manager and Document Service Modules
- IS 7.0 or higher (including ASP.NET extensions):

Create a new domain user account (preferably) or a local server account to be associated with the new IIS web application to be created. The IUSER account cannot be used because of limited application permission assignments allowed.

- SharePoint Server 2016 Client Components SDK:
 - Refer to <https://www.microsoft.com/en-us/download/details.aspx?id=51679>.
- Microsoft.IdentityModel.Extensions.dll:
 - This library is available for download from the following location:
<http://download.microsoft.com/download/0/1/D/01D06854-CA0C-46F1-ADBAEBF86010DCC6/MicrosoftIdentityExtensions-32.msi>