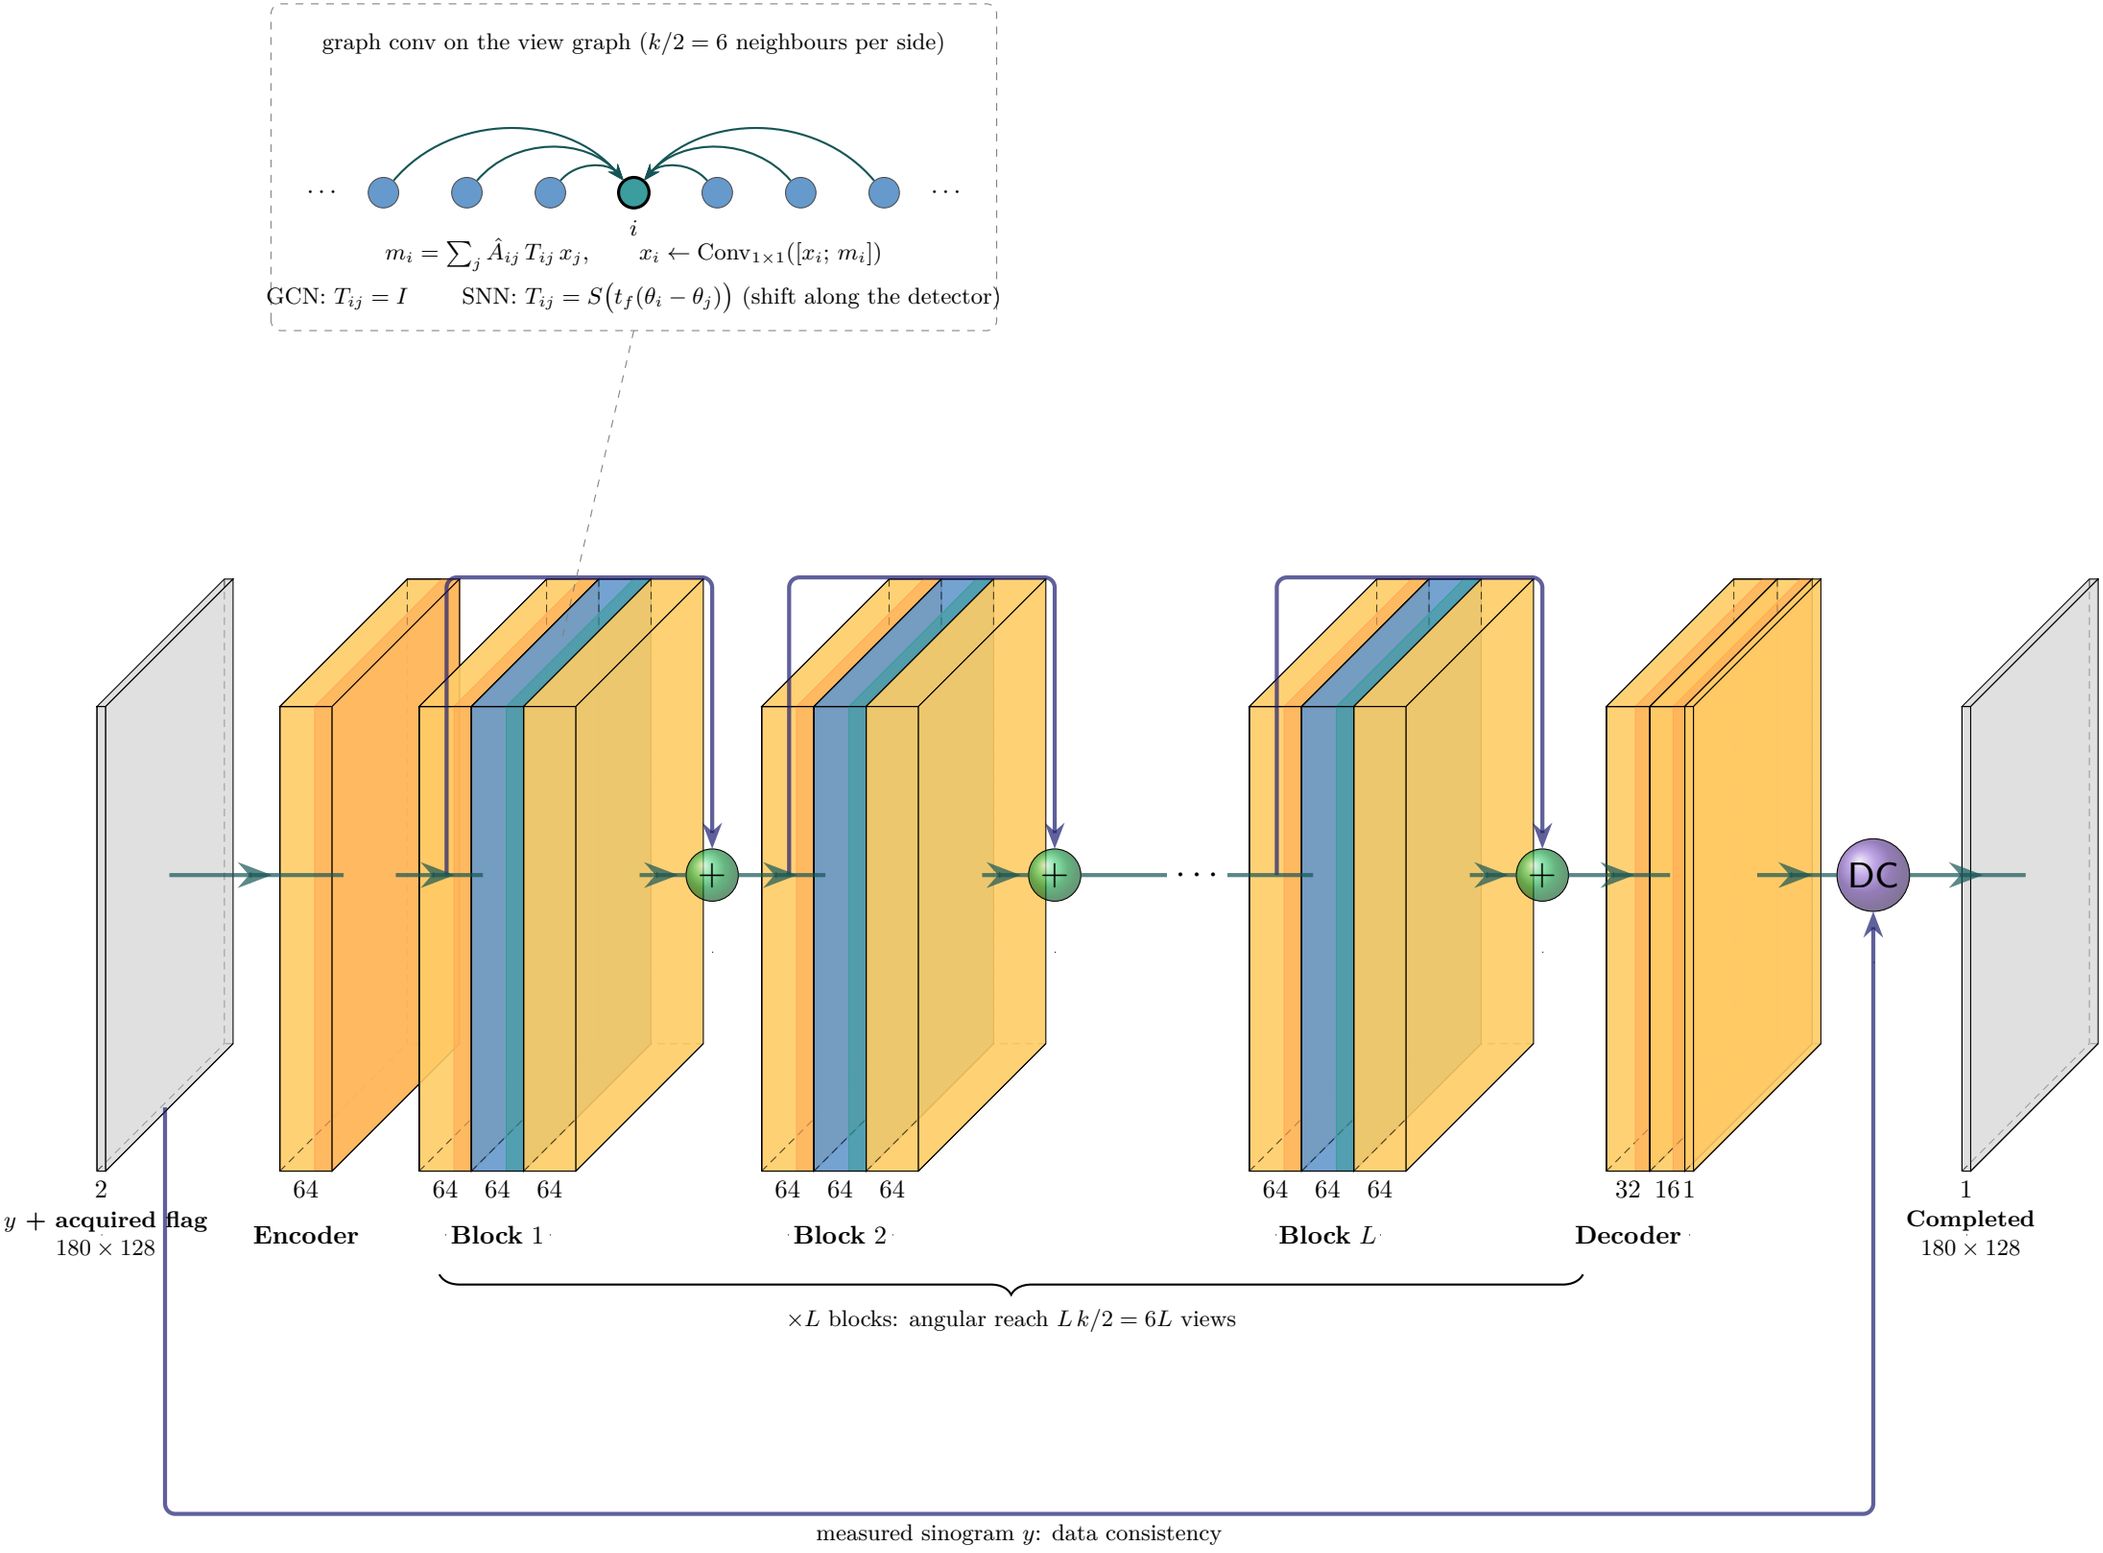
graph conv on the view graph ($k/2 = 6$ neighbours per side)
i
$m_i = \sum_j \hat{A}_{ij}\, T_{ij}\, x_j, \qquad x_i \leftarrow \mathrm{Conv}_{1\times1}([x_i;\, m_i])$
GCN: $T_{ij} = I$ SNN: $T_{ij} = S\big(t_f(\theta_i - \theta_j)\big)$ (shift along the detector)
DC
2
y + acquired flag
180 × 128
64
Encoder
64 64 64
Block 1
64 64 64
Block 2
64 64 64
Block L
32 16 1
Decoder
1
Completed
180 × 128
$\times L$ blocks: angular reach $L\,k/2 = 6L$ views
measured sinogram y: data consistency
conv 1 × 3 along the detector + (ViewNorm +) GELU
graph conv between views + ViewNorm + GELU
residual connection
data consistency (measured views kept)
identity path