measured sinogram y: residual learning and data consistency

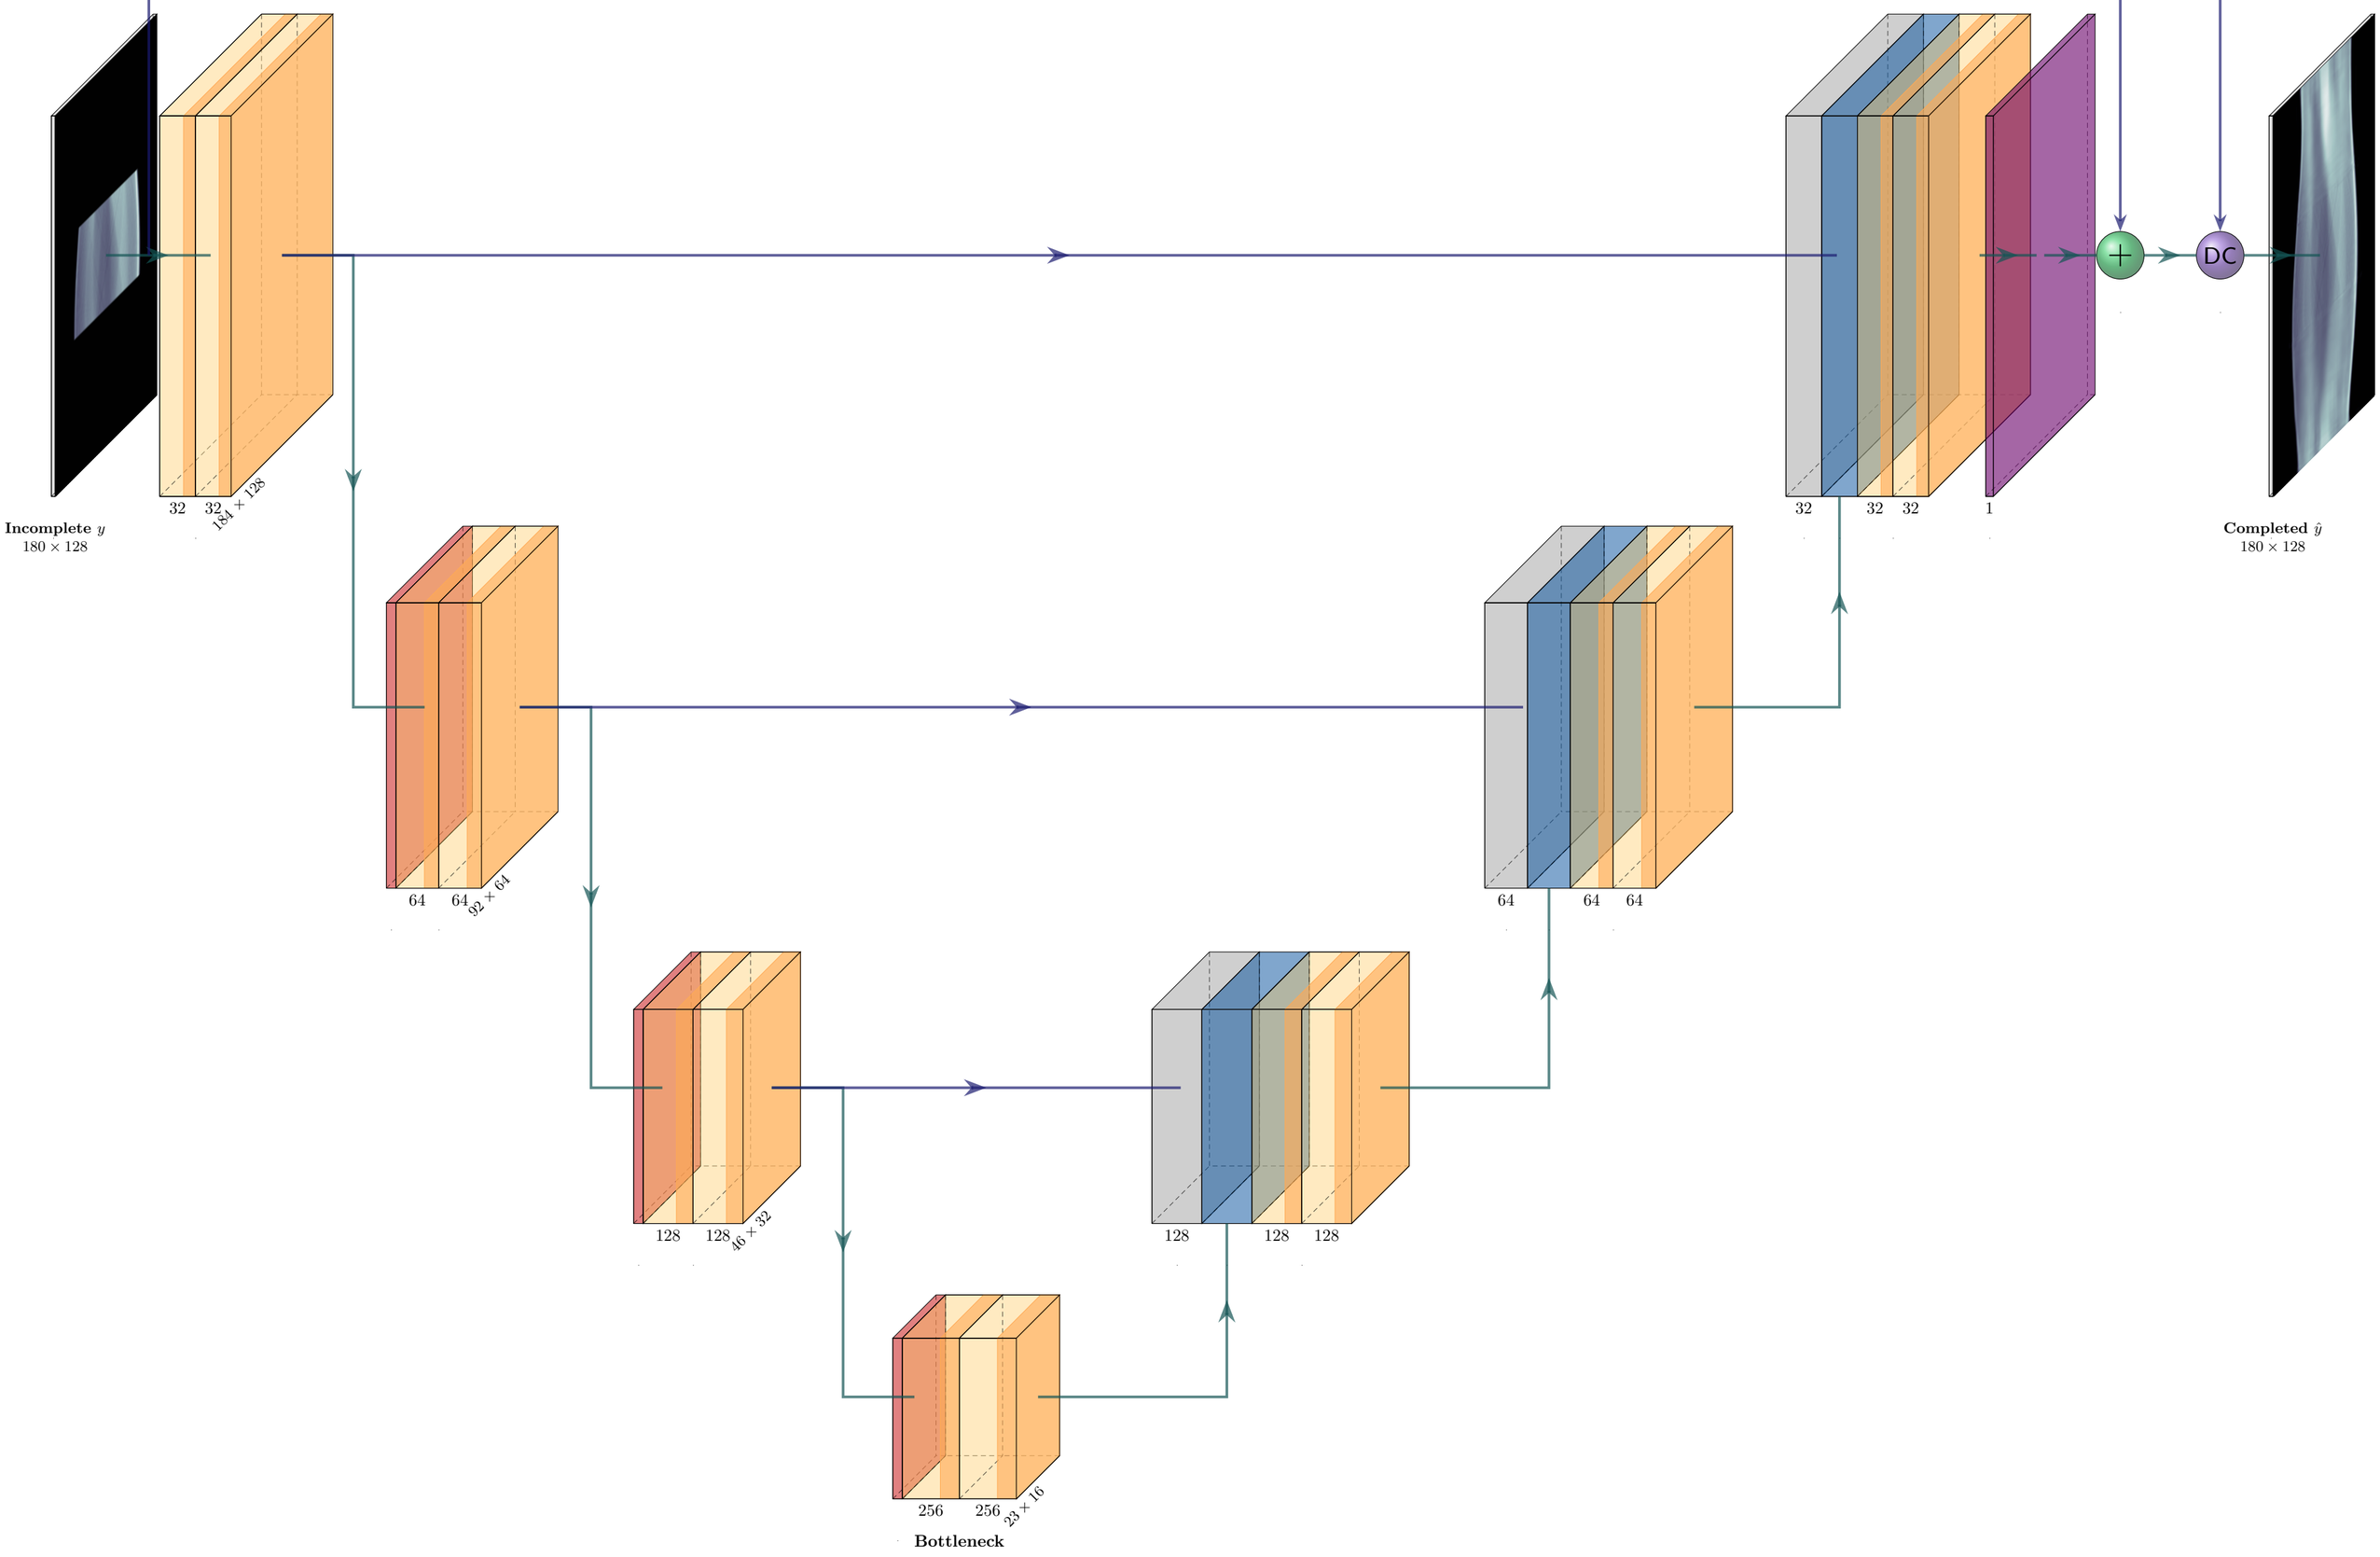

conv 3×3 + InstanceNorm + LeakyReLU

max pooling 2×2

bilinear $\times 2$ + conv 3×3

skip connection (concatenation)

conv 1×1

residual: $y + f_\theta(y)$

data consistency (measured views kept)

copy of the input