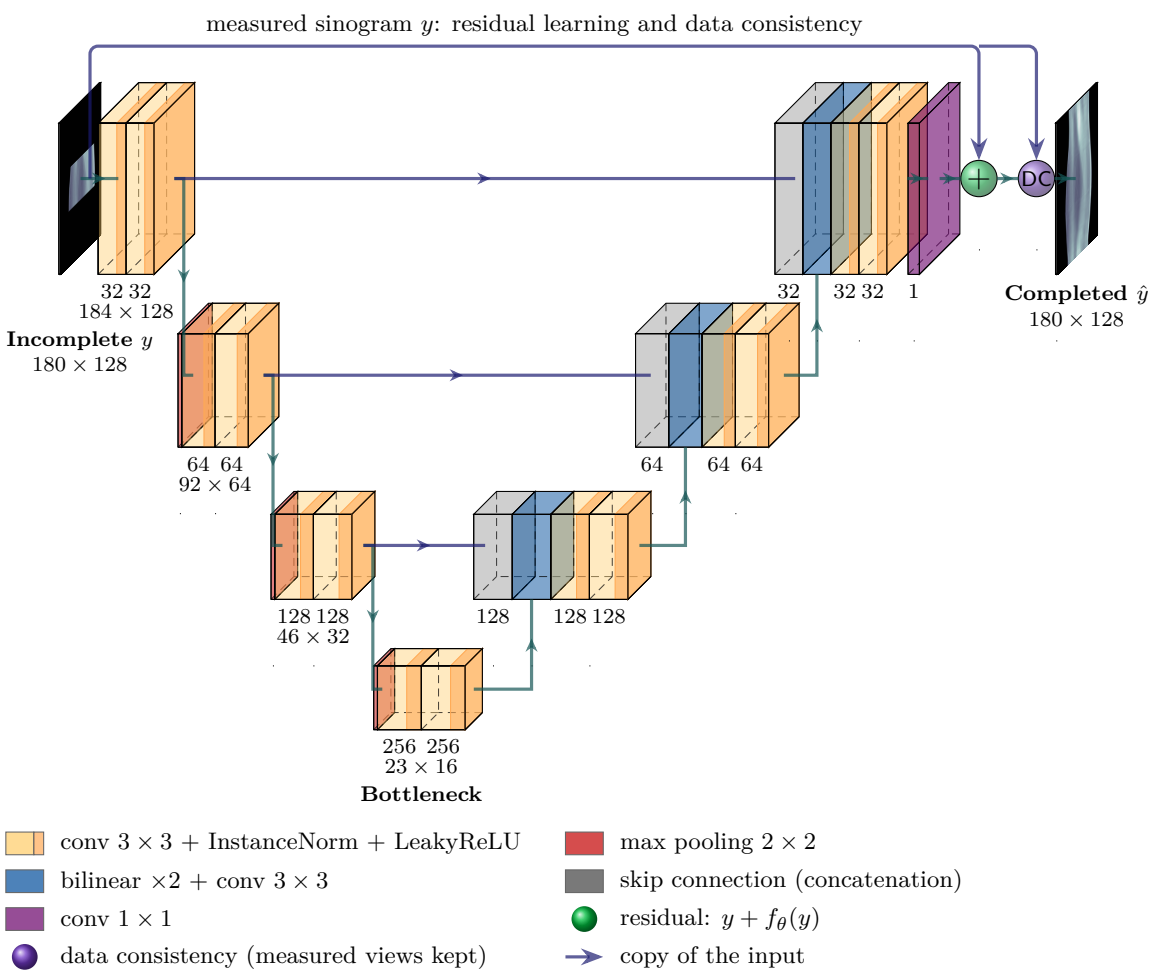
measured sinogram $y$: residual learning and data consistency
32 32
184 × 128
Incomplete $y$
180 × 128
64 64
92 × 64
128 128
46 × 32
256 256
23 × 16
Bottleneck
128
128 128
64
64 64
32
32 32
1
DC
Completed $\hat{y}$
180 × 128
conv 3 × 3 + InstanceNorm + LeakyReLU
bilinear ×2 + conv 3 × 3
conv 1 × 1
data consistency (measured views kept)
max pooling 2 × 2
skip connection (concatenation)
residual: $y + f_\theta(y)$
copy of the input