



API CLIENT DEVPORTAL GUIDE

SeatJumper

10/6/2025

API CLIENT DEVPORTAL GUIDE

CONTENTS


Overview	2
Logging into the devportal	2
Logging out of the devportal	3
Viewing API Documentation	4
Documentation (Supplemental)	4
Swagger UI and Postman collection	5
Trying out APIs	6
API Try Out	6
Subscribing to New APIs	8
Subscribing Through the “APIs” tab	9
Subscribing Through the “applications” tab	10
Adding a new application	12
Creating access token	13

OVERVIEW

This document contains instructions on how to use TicketNetwork's API DevPortal to view API documentation and use a TestApplication try out APIs through DevPortal in Sandbox.

LOGGING INTO THE DEVPORTAL

Navigate to <https://console.tn-apis.com/devportal/> and log in to your account using the "Sign-In" link located in the top menu to the far right. If you are already logged in your username will appear here instead of the "Sign-In" link.

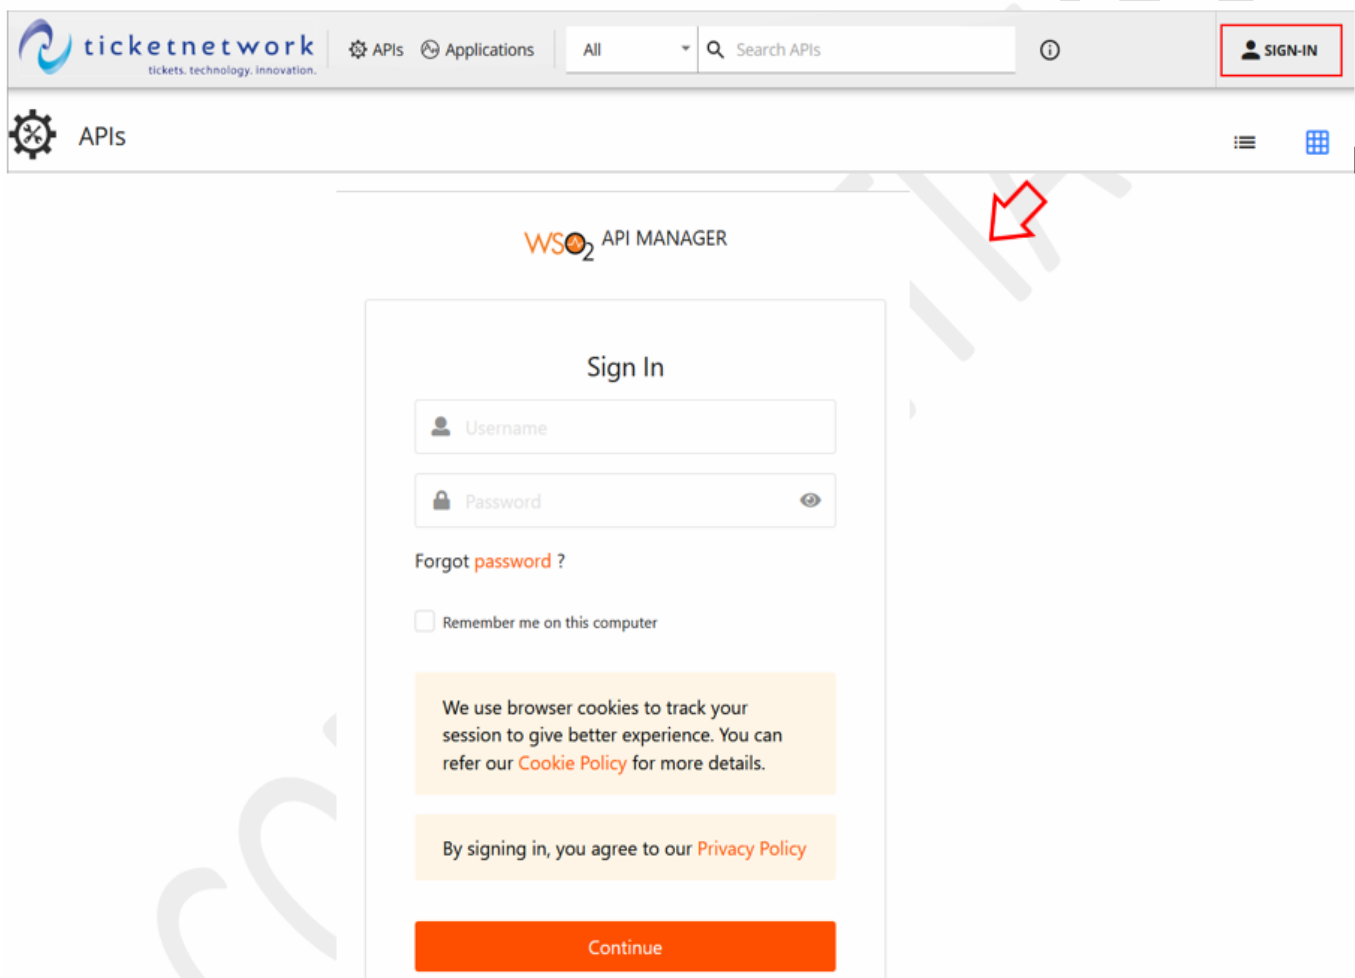

ticketnetwork
tickets. technology. innovation.

APIs Applications All Search APIs

SIGN-IN

APIs

WSO2 API MANAGER

Sign In

Username

Password

Forgot password ?

☐ Remember me on this computer

We use browser cookies to track your session to give better experience. You can refer our [Cookie Policy](#) for more details.

By signing in, you agree to our [Privacy Policy](#)

Continue

Your DevPortal Login

Username	SeatJumper-store
----------	------------------


Password

6W@s2#@RbFjM

You will not be able to view any APIs or their documentation unless you are logged into your account.


LOGGING OUT OF THE DEVPORTAL

If you wish to log out of the DevPortal, you can do so by clicking on your username in the top menu on the far right. A popover will appear with a link to “Logout”, which can be used to end your devportal session.

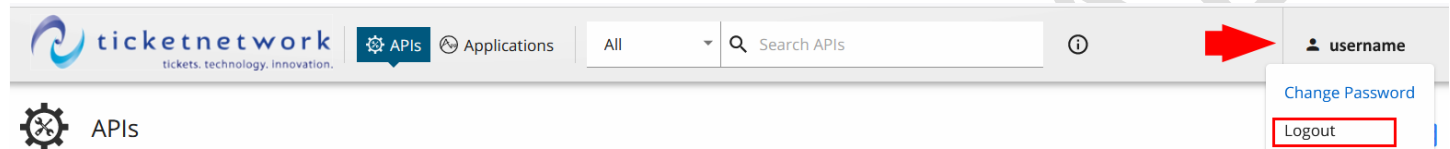

VIEWING APIS

Right after you log in into the devportal account you'll see all API's you have access to. You can use a search to look for an API. You can review an API if you click on it.

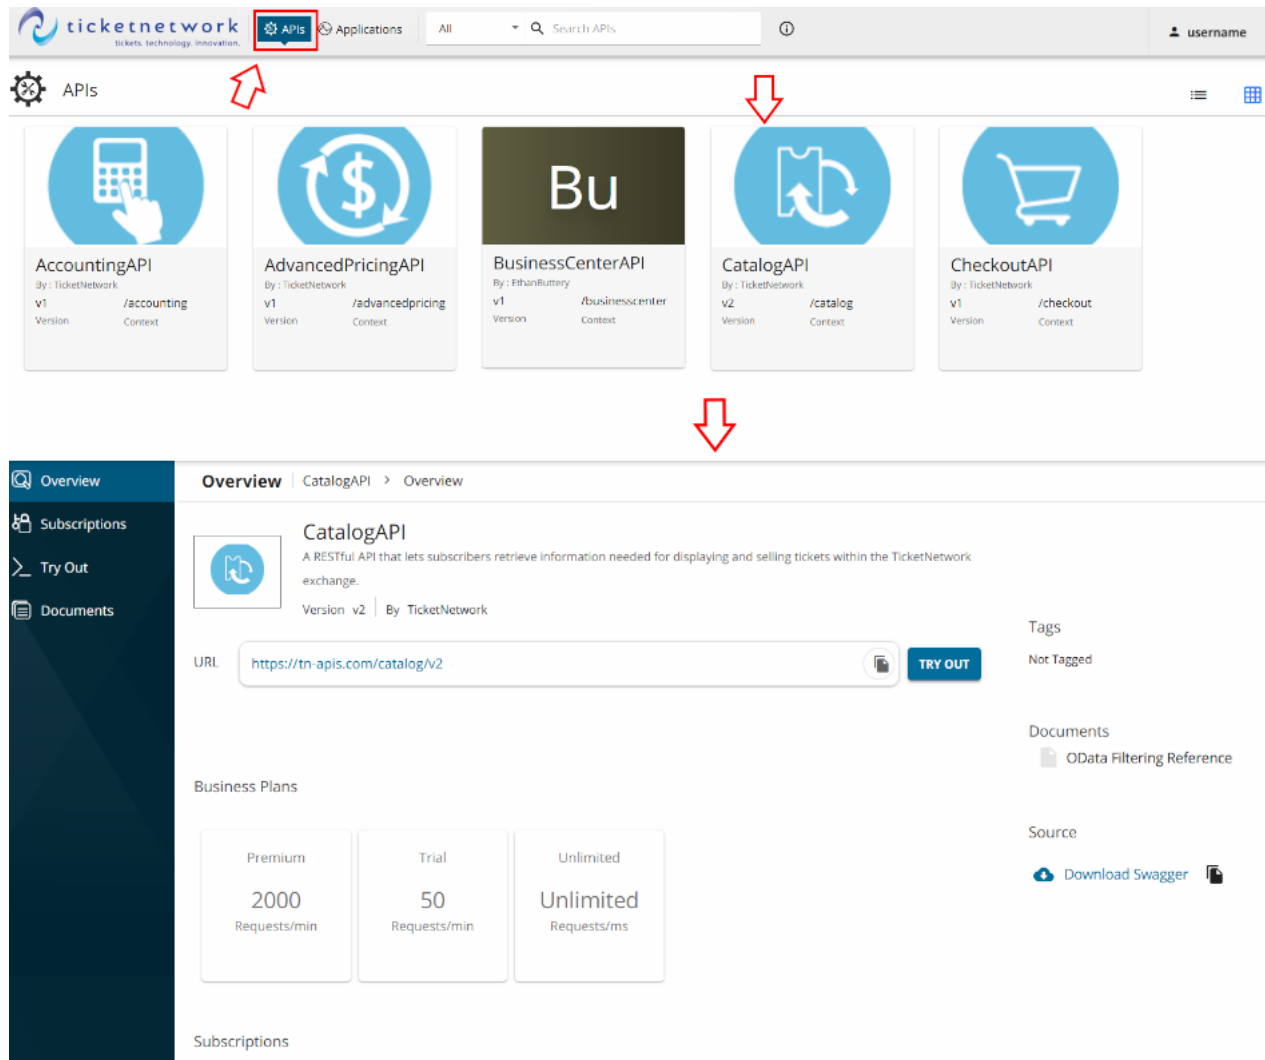


The screenshot shows the TicketNetwork DevPortal interface. At the top, the 'APIs' link in the navigation bar is highlighted with a red box and a red arrow. Below, a grid of API cards is displayed. The 'CatalogAPI' card is highlighted with a red arrow. A second red arrow points down to the 'CatalogAPI' documentation page. The page shows the API's overview, including its description, version (v2), and a 'TRY OUT' button. The left sidebar contains links for Overview, Subscriptions, Try Out, and Documents. The main content area displays the API's details, including its URL, tags, documents, and business plans.

VIEWING API DOCUMENTATION

All API documentation is available directly in the DevPortal. This documentation can be used to gain an understanding of what resources each API offers and start planning your API integration. Supplemental materials, such as a Client Integration Guide, will also be provided during the start of the integration process.

To view the documentation for an API, navigate to the “Documents” tab on the API’s page in the DevPortal via the APIs link in the left menu.

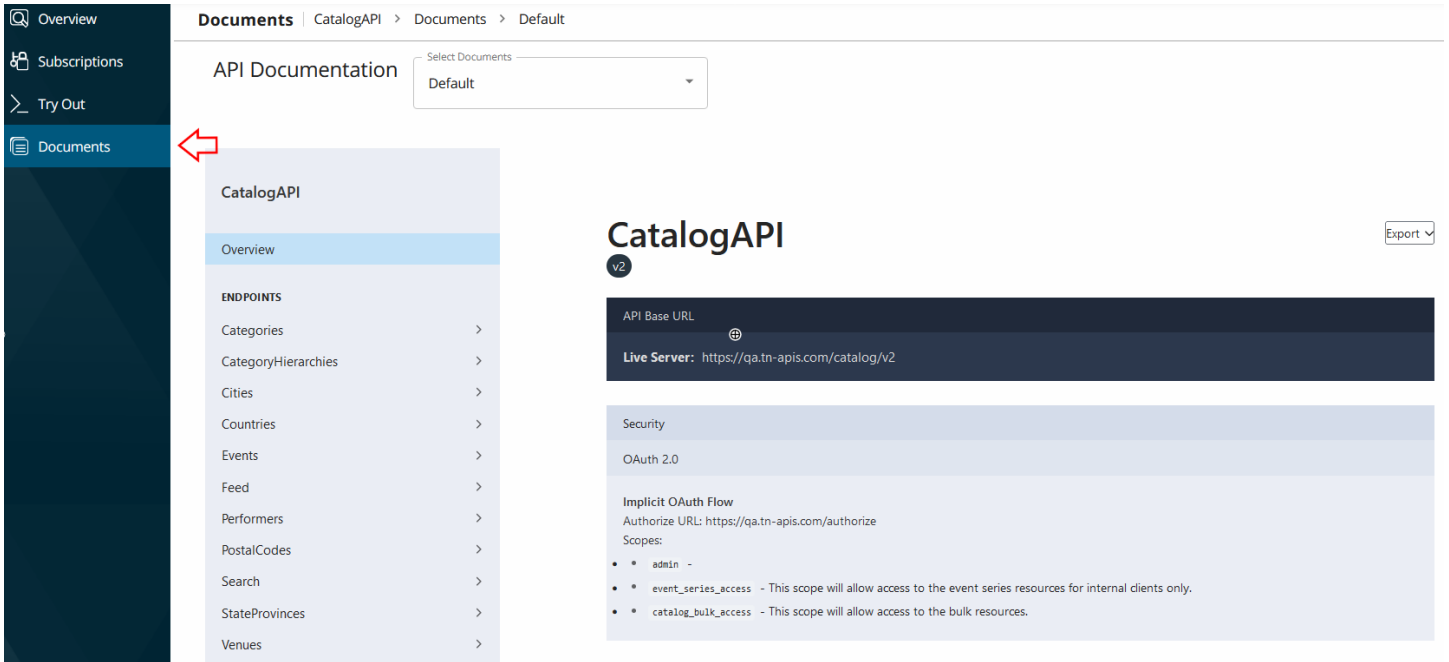

Overview | Subscriptions | Try Out | **Documents**

Documents | CatalogAPI > Documents > Default

API Documentation

Select Documents
Default

CatalogAPI

Overview

ENDPOINTS

- Categories >
- CategoryHierarchies >
- Cities >
- Countries >
- Events >
- Feed >
- Performers >
- PostalCodes >
- Search >
- StateProvinces >
- Venues >

CatalogAPI v2

API Base URL

Live Server: <https://qa.tn-apis.com/catalog/v2>

Security

OAuth 2.0

Implicit OAuth Flow

Authorize URL: <https://qa.tn-apis.com/authorize>


Scopes:

- admin -
- event_series_access - This scope will allow access to the event series resources for internal clients only.
- catalog_bulk_access - This scope will allow access to the bulk resources.

DOCUMENTATION (SUPPLEMENTAL)

The “Documents” tab contains additional information that is useful for integrating with the API, ranging from workflows and samples, to test cases and details on expected URL parameter syntax.

Use the API Documentation dropdown on the Documents tab to switch between documents.

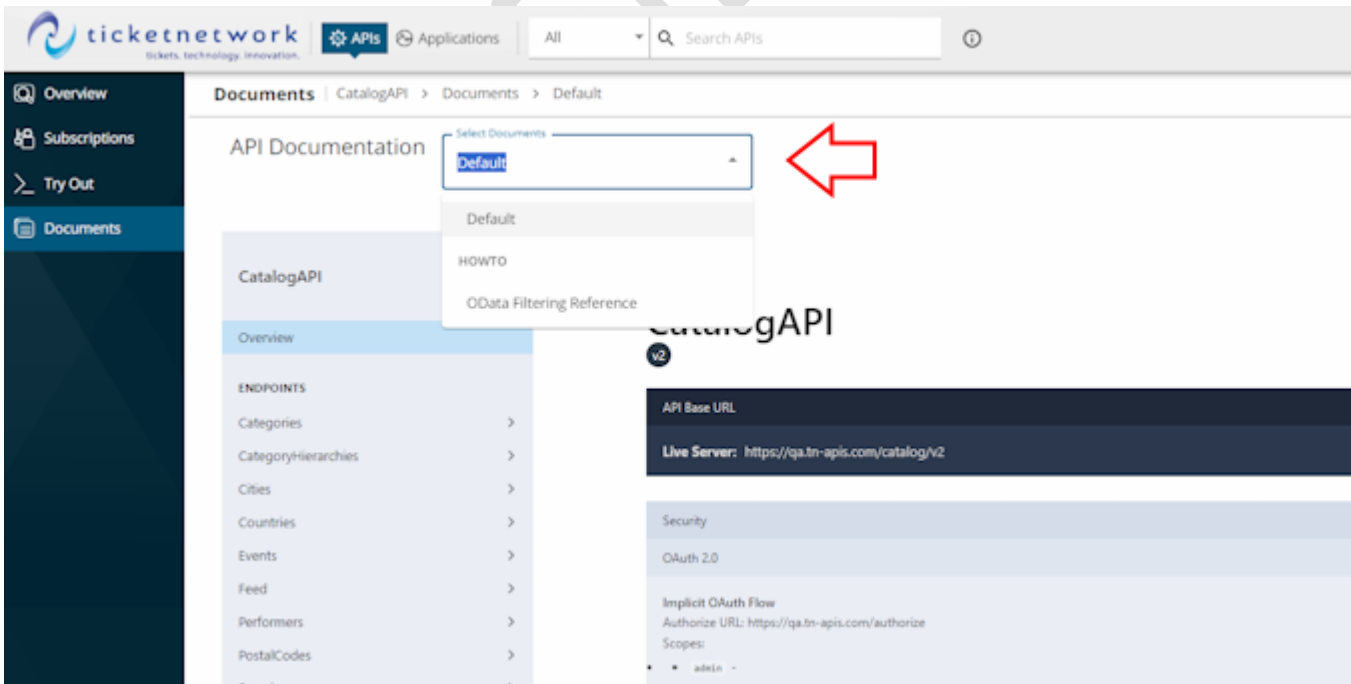

ticketnetwork tickets. technology. innovation.

APIs Applications All Search APIs

Documents | CatalogAPI > Documents > Default

API Documentation

Select Documents
Default

Default

HOWTO

OData Filtering Reference

CatalogAPI v2

API Base URL

Live Server: <https://qa.tn-apis.com/catalog/v2>

Security

OAuth 2.0

Implicit OAuth Flow

Authorize URL: <https://qa.tn-apis.com/authorize>


Scopes:

- admin -

SWAGGER UI AND POSTMAN COLLECTION

TicketNetwork, Inc. © 2023

The “Try out” tab contains Swagger UI documentation that defines the structure of the API and its responses and Postman collection. Also, Swagger UI documentation can be downloaded directly from the API Overview or Try Out pages:

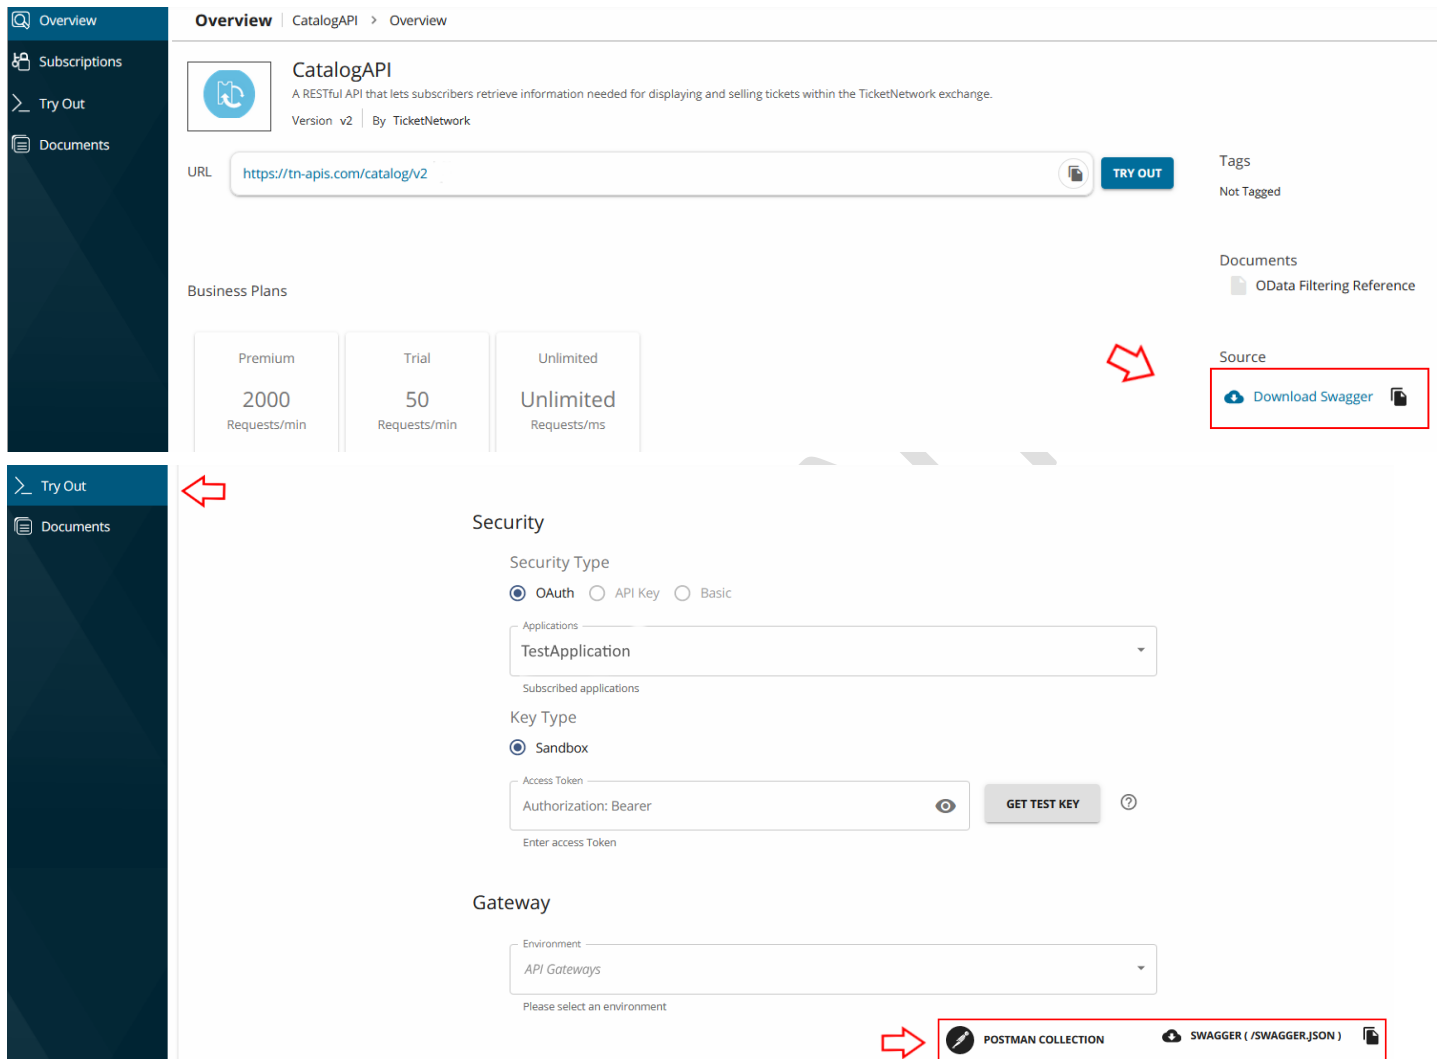

Overview | CatalogAPI > Overview

CatalogAPI
A RESTful API that lets subscribers retrieve information needed for displaying and selling tickets within the TicketNetwork exchange.
Version v2 | By TicketNetwork

URL: **TRY OUT**

Tags: Not Tagged

Documents: OData Filtering Reference

Business Plans

Premium	Trial	Unlimited
2000 Requests/min	50 Requests/min	Unlimited Requests/ms

Source: [Download Swagger](#)

Try Out

Security

Security Type: ☒ OAuth ☐ API Key ☐ Basic

Applications:

Subscribed applications

Key Type: ☒ Sandbox

Access Token: **GET TEST KEY**

Enter access Token

Gateway

Environment:


Please select an environment

POSTMAN COLLECTION **SWAGGER (/SWAGGER.JSON)**

TRYING OUT APIS

API TRY OUT

You can try out calls to APIs you are subscribed to within the DevPortal by navigating to the API’s page and selecting the API you want to use, then going to the “Try Out” tab.

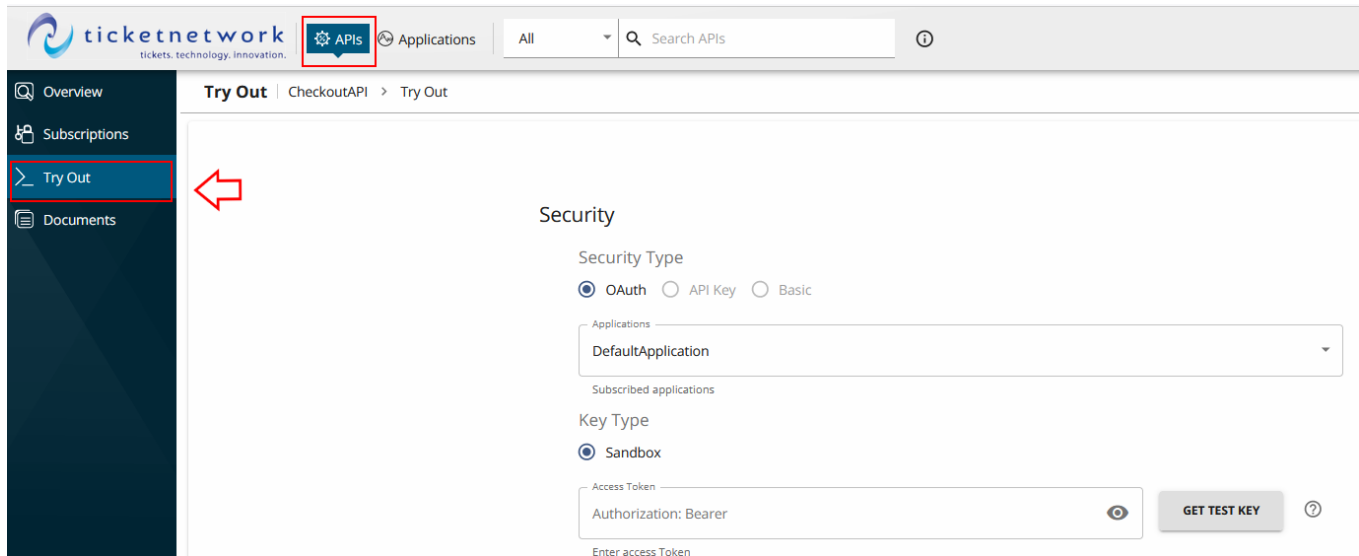

1. Choose “TestApplication” by select Applications dropdowns.
2. Enter your Access Token:

Security

Security Type

☒ OAuth ☐ API Key ☐ Basic

Applications

TestApplication

Subscribed applications

Key Type

☒ Sandbox

Access Token

Authorization: Bearer

Enter access Token

GET TEST KEY



Important! You cannot get your Access Token by using the Get Test Key button. DO NOT USE this button. It will override your Access Token.

Access Token

Authorization: Bearer


Enter access Token

~~GET TEST KEY~~



3. Expand the resource that you want to try by clicking on the resource path.

Note! In the UI, the Parameter fields will be disabled and the “Execute” button will be hidden by default. To enable the fields and show the “Execute” button click on the “Try it out” button:

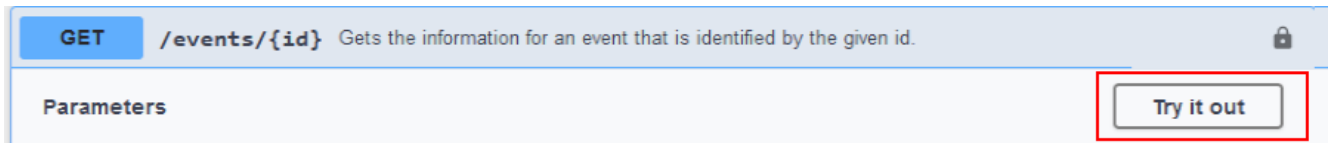


GET /events/{id} Gets the information for an event that is identified by the given id.

Parameters

Try it out

4. Fill out the request parameters.
5. Click the “Execute” button.

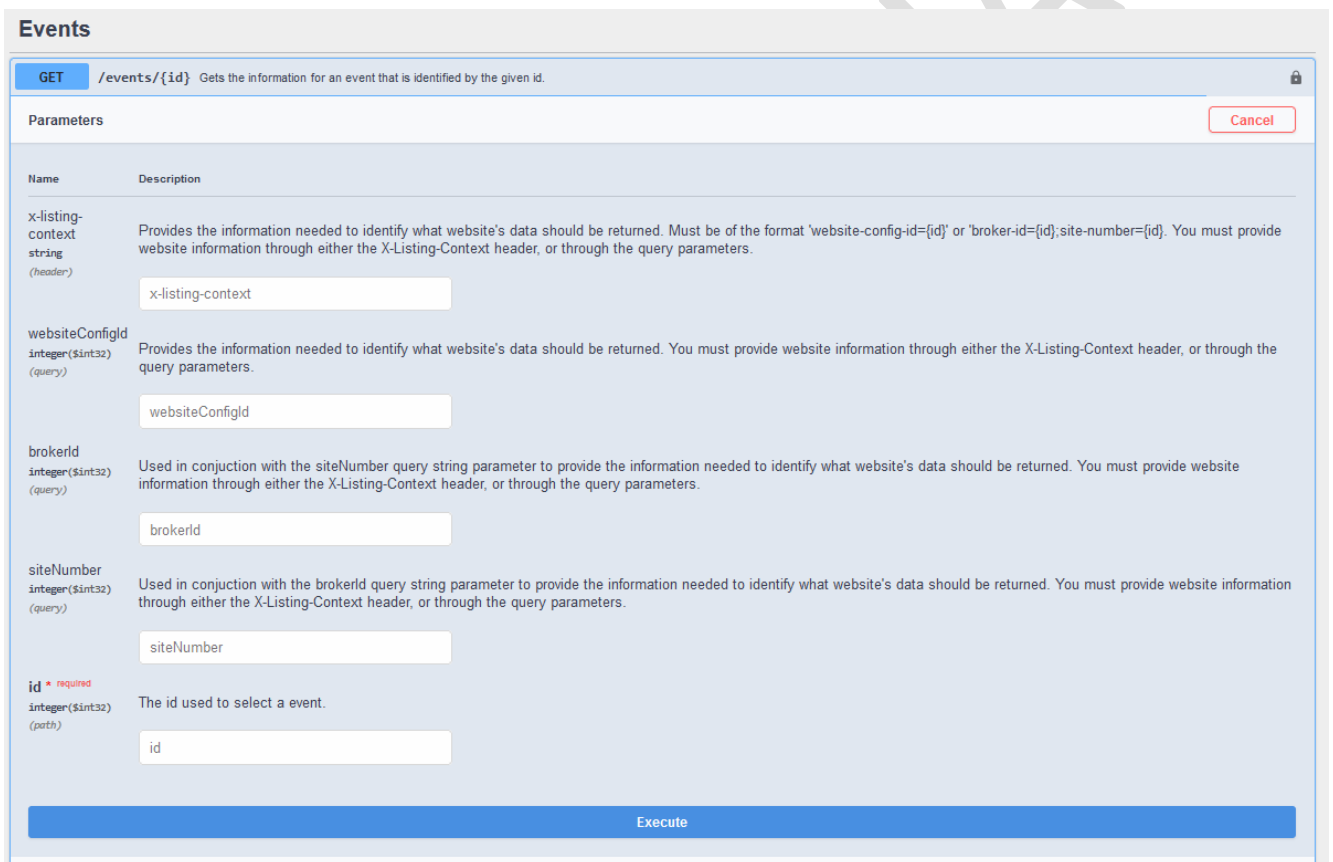

Events

GET /events/{id} Gets the information for an event that is identified by the given id.

Parameters

Cancel

Name	Description
x-listing-context string (header)	Provides the information needed to identify what website's data should be returned. Must be of the format 'website-config-id={id}' or 'broker-id={id};site-number={id}'. You must provide website information through either the X-Listing-Context header, or through the query parameters.
websiteConfigId integer(\$int32) (query)	Provides the information needed to identify what website's data should be returned. You must provide website information through either the X-Listing-Context header, or through the query parameters.
brokerId integer(\$int32) (query)	Used in conjunction with the siteNumber query string parameter to provide the information needed to identify what website's data should be returned. You must provide website information through either the X-Listing-Context header, or through the query parameters.
siteNumber integer(\$int32) (query)	Used in conjunction with the brokerId query string parameter to provide the information needed to identify what website's data should be returned. You must provide website information through either the X-Listing-Context header, or through the query parameters.
id * required integer(\$int32) (path)	The id used to select a event.

Execute

SUBSCRIBING TO NEW APIS



The TicketNetwork APIs are hosted in two environments: Sandbox and Production. The Sandbox environment is built for integration and testing, and the Production environment is for live traffic. You CANNOT create Production tokens in the DevPortal. TN WebSupport will provide you with all Production keys when your application will be ready to move too Production.

A TestApplication has been created for you which you can use to try out our APIs in the Sandbox environment. Subscriptions to Mercury API, Catalog API, TicketVault API and WebHook API have already been added for your TestApplication, and requests against resources associated with WCID 23884 (ONLY for Catalog API),

WCID 27735, BID 13870 are allowed. If you want to try out any of the other APIs available to you, you can do so by subscribing to those APIs as well.


SUBSCRIBING THROUGH THE “APIs” TAB

1. Navigate to the API you want to subscribe to via the APIs tab in the top menu.
2. Click on “Subscriptions” in the right menu.
3. Select TestApplication in the “Applications” dropdown. If your TestApplication is already subscribed to this API it will not show up in the list.
4. Choose the Trial subscription tier in the “Tier” dropdown. The tier controls the throttling applied for this subscription.
5. Click the “Subscribe” button.

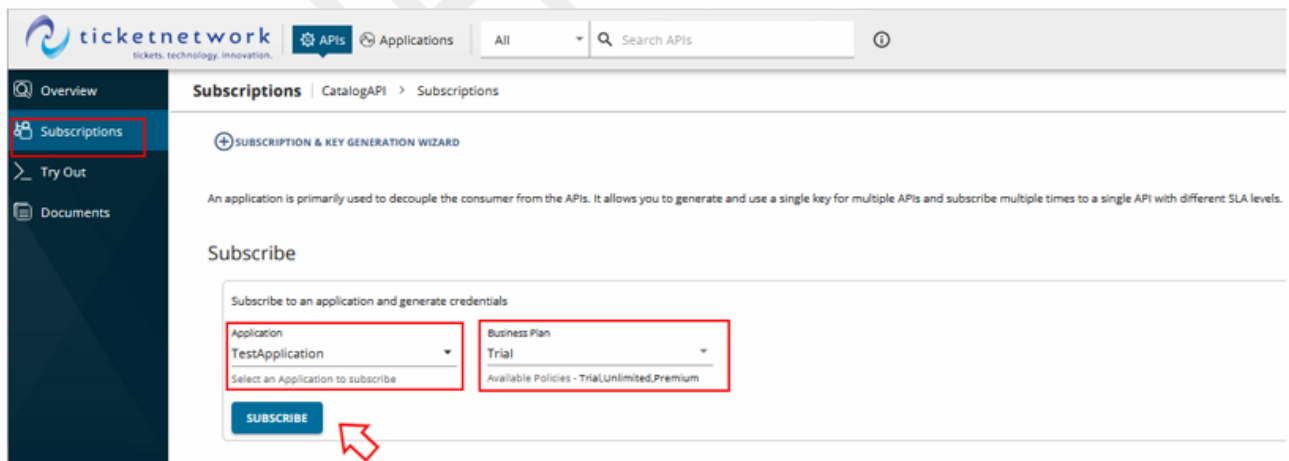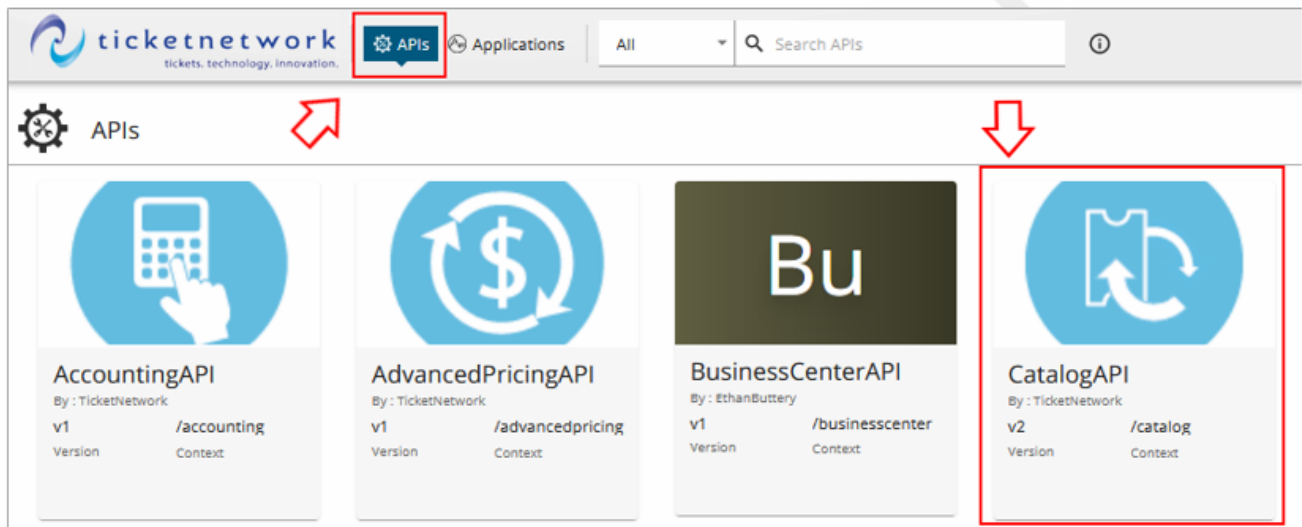

SUBSCRIBING THROUGH THE “APPLICATIONS” TAB

1. Navigate to the Applications tab in the top menu.
2. Click on the application you want to subscribe.
3. Select Subscriptions from the left menu.
4. Click on **+SUBSCRIBE APIS**
5. Choose the API by the search or by the page selection.
6. Click Subscribe.

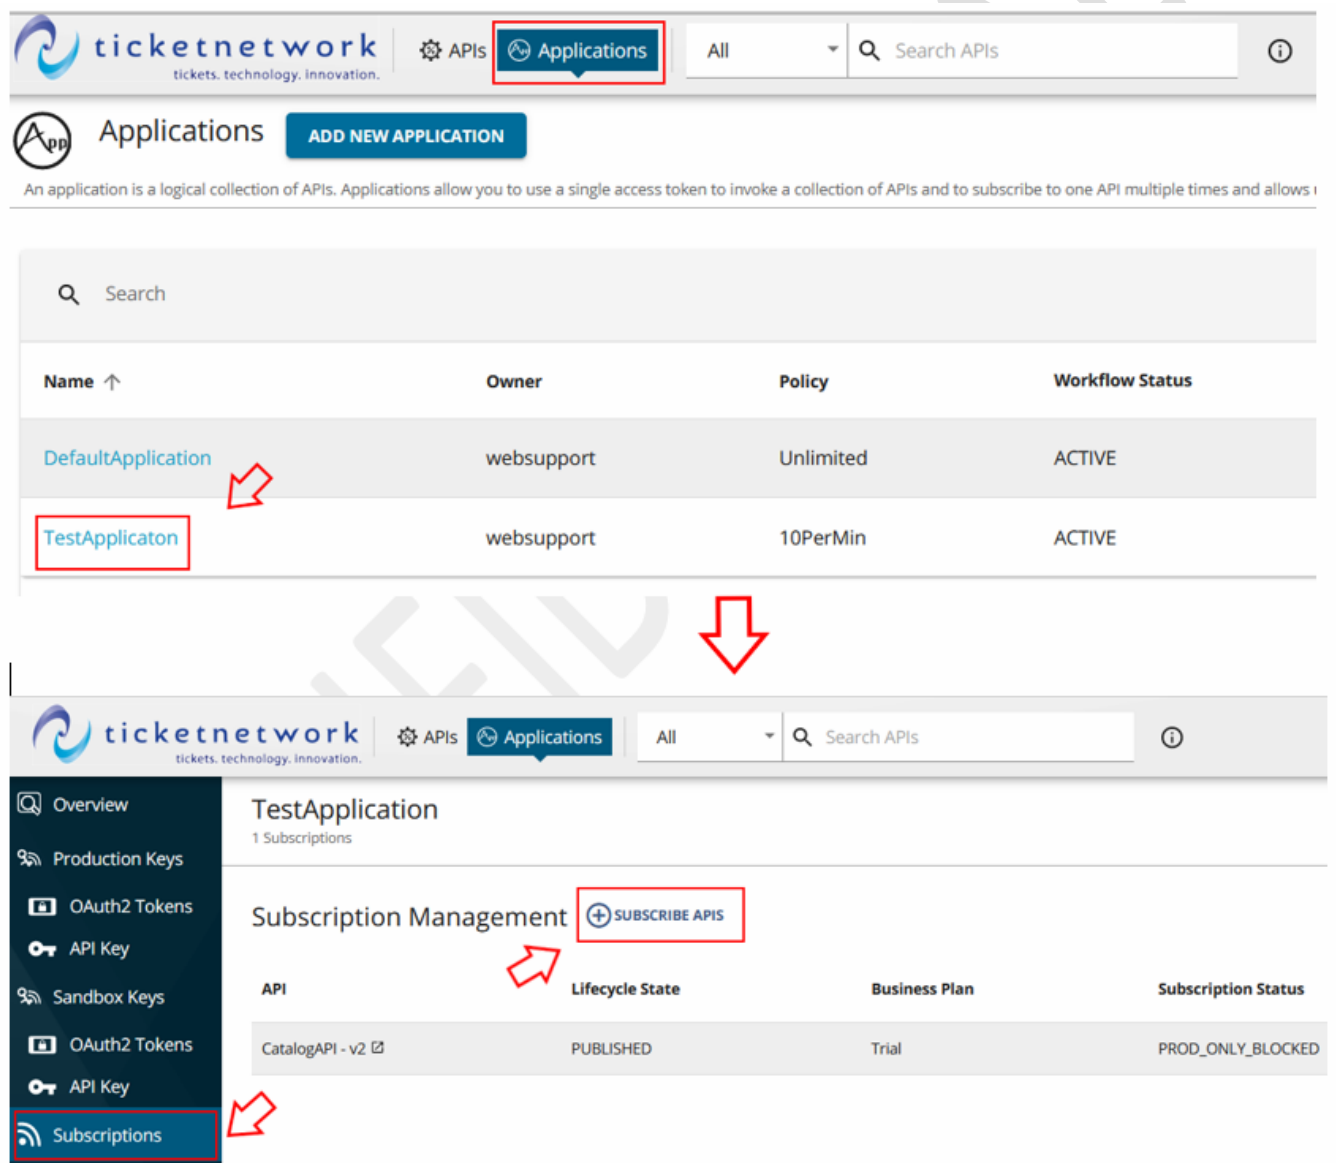

The screenshot shows the TicketNetwork interface. At the top, the 'Applications' tab is selected in the top navigation bar. Below this, the 'Applications' section is displayed with a table of applications. The 'TestApplication' is highlighted with a red box, and a red arrow points to it. Below the table, the 'Subscription Management' section is shown, where the '+SUBSCRIBE APIS' button is highlighted with a red box. A red arrow points to this button. On the left side, the 'Subscriptions' menu item is highlighted with a red box, and a red arrow points to it. The table below shows the details of the subscription for 'CatalogAPI - v2'.

Name ↑	Owner	Policy	Workflow Status
DefaultApplication	websupport	Unlimited	ACTIVE
TestApplication	websupport	10PerMin	ACTIVE

API	Lifecycle State	Business Plan	Subscription Status
CatalogAPI - v2	PUBLISHED	Trial	PROD_ONLY_BLOCKED



Subscribe APIs



Displaying all APIs

Name	Version	Subscription Status	
InventoryAPI	v1	Trial	SUBSCRIBE
InventoryAPI	v2	Trial	SUBSCRIBE
InventoryAPI	v3	Trial	SUBSCRIBE
InventoryAPI	v4	Trial	SUBSCRIBE
InventoryAPI	v5	Trial	SUBSCRIBE
ListenAPI	v1	Unlimited	SUBSCRIBE
MapWidgetApi	v2		SUBSCRIBE
MapWidgetApi	v3	Trial	SUBSCRIBE
MercuryAPI	v1	Trial	SUBSCRIBE
MercuryAPI	v3	Trial	SUBSCRIBE
Rows per page 10 21-30 of 49 < >			


After subscribing to an API, it will only be available to you in the Sandbox environment. You can view and manage your current subscriptions through the “Applications” tab.

ADDING A NEW APPLICATION

TicketNetwork, Inc. © 2023

A non-expiring Sandbox application API Key has already been generated for your TestApplication. This single key is used to authenticate the TestApplication against all the APIs it is subscribed to.

However, if you want to create a new application and generate tokens for it, then under the Applications tab you need to click on the ADD NEW APPLICATION tab.

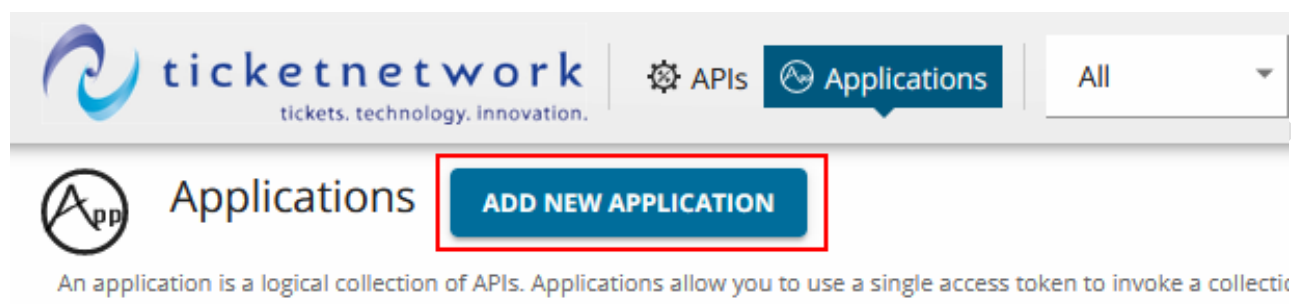

Then enter the name and choose a request quota. Click SAVE.

Create an application

Create an application providing name and quota parameters. Description is optional.

Required fields are marked with an asterisk (*)

Application Name *

My Application

Enter a name to identify the Application. You will be able to pick this application when subscribing to APIs

Shared Quota for Application Tokens *

10PerMin

Assign API request quota per access token. Allocated quota will be shared among all the subscribed APIs of the application.

Application Description


(512) characters remaining

SAVE


CANCEL

CREATING ACCESS TOKEN

Tokens can be generated if you go to the “Applications” tab at the top menu, then to Sandbox Keys > OAuth2 Tokens in the left menu:

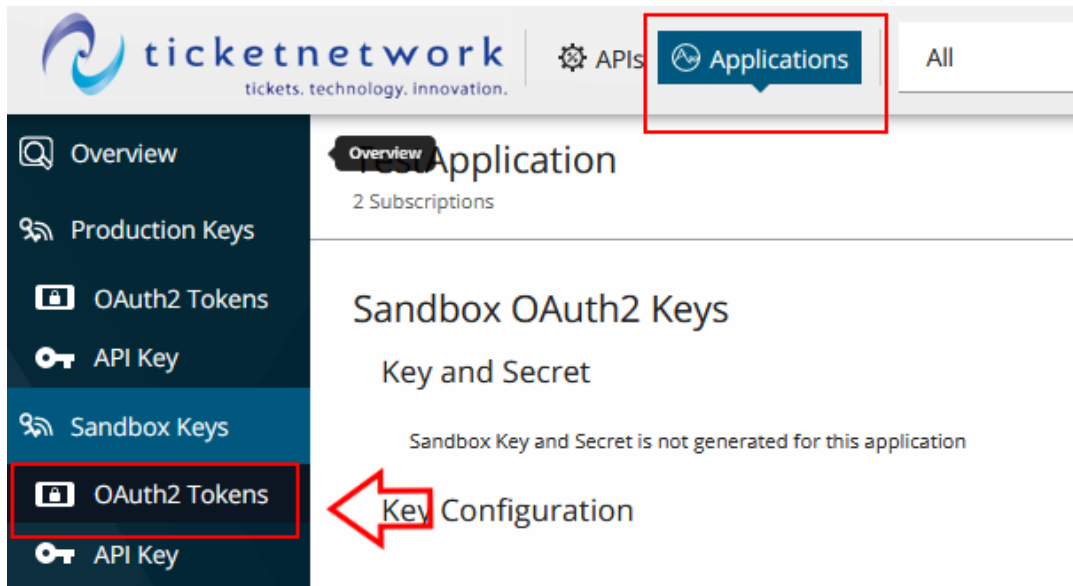

If this is a new application, you will need to Generate Keys for your application before generating a token. Scroll all the way down to the bottom of the page and click the “Generate Keys” button.

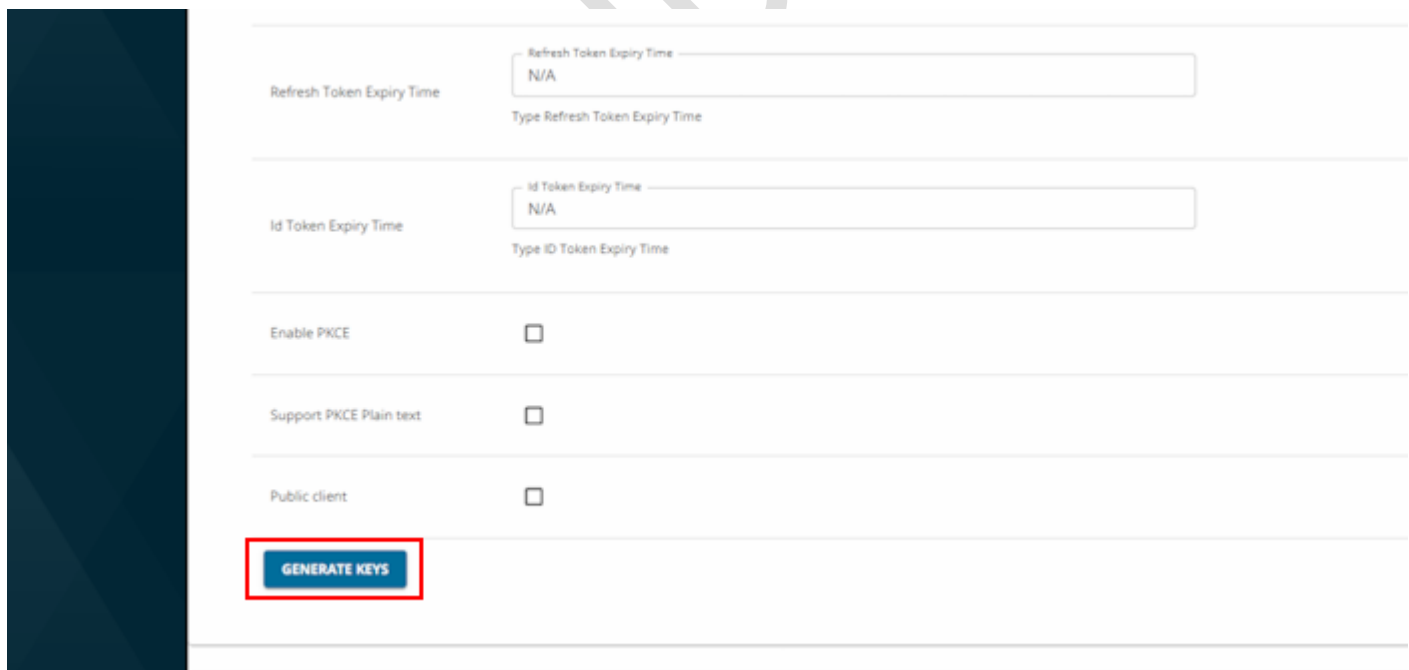

The screenshot shows the 'Key Configuration' form. It has two input fields for 'Refresh Token Expiry Time' and 'Id Token Expiry Time', both containing 'N/A'. Below these are three checkboxes: 'Enable PKCE', 'Support PKCE Plain text', and 'Public client', all of which are unchecked. At the bottom of the form, there is a blue button labeled 'GENERATE KEYS' which is highlighted with a red box.

If this is a new application, you will need to Generate Keys for your application before generating a token. Scroll all the way down to the bottom of the page and click the “Generate Keys” button.

Refresh Token Expiry Time

Refresh Token Expiry Time

N/A

Type Refresh Token Expiry Time

Id Token Expiry Time

Id Token Expiry Time

N/A

Type ID Token Expiry Time

Enable PKCE

☐

Support PKCE Plain text

☐

Public client

☐

GENERATE KEYS

Generated Consumer Key and Consumer Secret will appear at the top of the page:

Overview

Production Keys

OAuth2 Tokens

API Key

Sandbox Keys

OAuth2 Tokens

API Key

TestApplication

2 Subscriptions

EDIT

DELETE

Sandbox OAuth2 Keys

Key and Secret

REMOVE KEYS

Consumer Key

5bw7pVPg_IK8WrKHTF66OE1lywa

Consumer Key of the application

Consumer Secret

Consumer Secret of the application

After generating your application keys, you will need to set up an expiration for the token before you generate the token.

To generate a token that expire in one hour use 3600 seconds. Click “Update” at the bottom of the page to save it.

Application Access Token Expiry Time	3600 Type Application Access Token Expiry Time
User Access Token Expiry Time	3600 Type User Access Token Expiry Time
Refresh Token Expiry Time	3600 Type Refresh Token Expiry Time
Id Token Expiry Time	3600 Type ID Token Expiry Time
Enable PKCE	☐
Support PKCE Plain text	☐
Public client	☐

UPDATE

You do not need to change anything for the Grant Types, Enable PKCE, Support PKCE Plain text and Public client checkboxes. Leave it as it is by default.

Grant Types

☐ Refresh Token
 ☐ SAML2
 ☒ Password
 ☒ Client Credentials
 ☐ IWA-NTLM
 ☐ Device Code
 ☐ Code

☐ urn:ietf:params:oauth:grant-type:token-exchange
 ☐ JWT

The application can use the following grant types to generate Access Tokens. Based on the application requirement, you can enable or disable grant types for this application.

You have to generate your access token. Please take a look at the following document. [API+Authorization.pdf \(tn-release.s3.amazonaws.com\)](#)