



# Run oTree studies **easily** with LabLauncher

Put your oTree project in a folder with your name on the lab computer or use *GitHub* (see below).


1. Double-click **Start oTree LabLauncher** on the desktop.
2. Click **Browse** and point it at your oTree study folder, or use **GitHub** to clone it first.

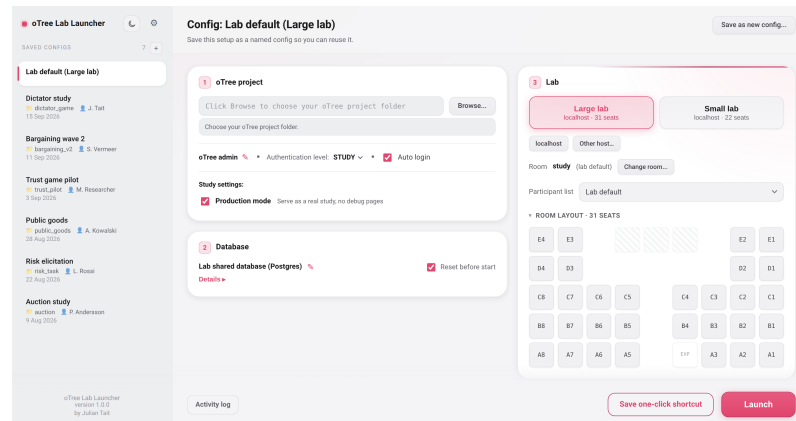

3. Get it ready for the lab. In one step this wires up the participant computer seat links, the seat labels, and the shared lab database.

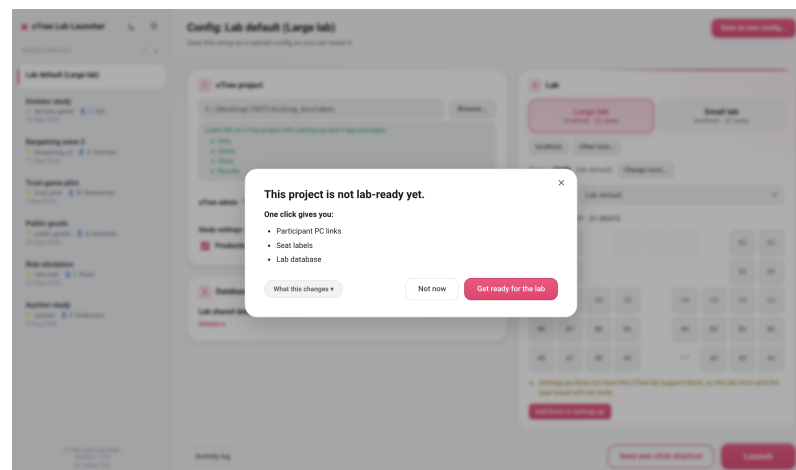

4. Launch. This starts the server and lets each lab computer join with its own link.

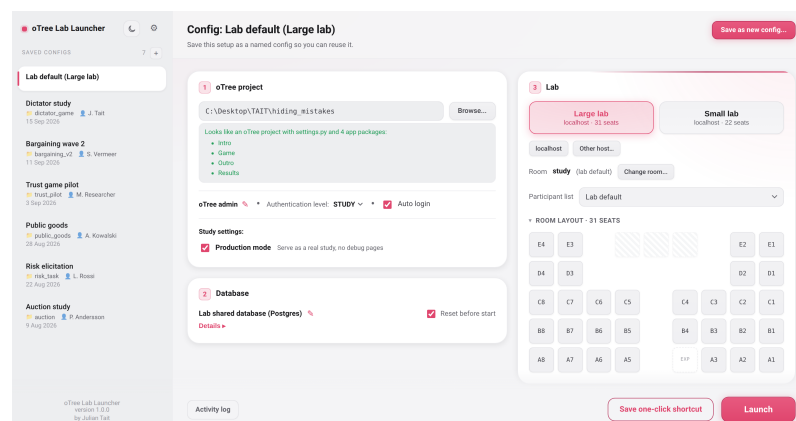

5. Optional: Save a one-click shortcut to the desktop for next time.

## Using GitHub instead of a USB stick

1. **Put your study in the lab organisation.** If your experiment is a GitHub repository, add it to the lab organisation on GitHub, **CREED-UvA** (<https://github.com/CREED-UvA>). Ask the lab manager for access: they add you to the organisation or create the repository for you.
2. **Clone it on the lab computer.** Instead of copying the study over by USB stick, click the **GitHub** button in the LabLauncher, type (or pick) the repository name, choose your name as researcher, and click **Clone**. The study is saved locally on that computer and selected.
3. **It stays up to date.** Whenever you select the study, the launcher checks GitHub and offers **Update** if there are newer commits. The **Git Pull** button does the same by hand.
4. **Optional, one-time setup on your own computer.** To make every future `git push` also update the lab copy, run these two lines in your study folder:

```
git remote set-url --add --push origin <your current repository URL>  
git remote set-url --add --push origin https://github.com/CREED-UvA/<your-study>.git
```

The first line keeps pushing to your own repository: adding a push address replaces the default one, so your own address has to be added back first. After this, one `git push` updates both. Check with `git remote -v`, which lists two (*push*) lines.

## Tips and troubleshooting

- **Running one session across both labs at once.** To pool the small and large lab into a single session, pick one computer to host the server, get ready as normal, and set the participant list to *None* before launching. When a participant list is selected, oTree only admits the seat labels that appear in it, so the other lab's seat labels are refused. With the participant list set to *None*, any label is accepted, so both labs can join the same session.