


## CST 370 Homework (Linked Lists)

1. Suppose that you are given a linked list as shown below. You can read about **linked lists** from section 6.4 and 6.5 of the book. Source code describing the operation of a Linked List is available on iLearn (LinkedList.h, LinkedList.cpp and Sample\_LinkedList\_Tester.cpp). (10 points)

Assume that there is a function insert (as defined below) to add a node in the linked list. Read the insert function very carefully.

```
void List::insertnew(ElementType dataVal, int index)
{
    mySize++;
    Node * newPtr = new Node(dataVal);
    Node * predPtr = first;

    for(int i = 0; i <= index; i++)
    {
        predPtr = predPtr->next;
    }
    newPtr->next = predPtr->next;
    predPtr->next = newPtr;
}
```

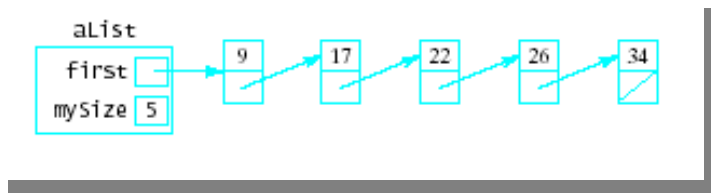

(a) Draw the updated linked list after the execution of **aList.insertnew(20, 1)**.

(b) From the result of the above question (a), draw the updated linked list after the execution of **aList.insertnew(30, 1)**.

2. The following presents the **insertnew()** member function for a **static array-based list**. (10 points)

```
void List::insertnew (ElementType item, int pos)
{
    if (pos < 0 || pos > mySize) {
        cerr << "Illegal location: " << pos << "\n";
        return;
    }

    for(int i = mySize; i > pos; i--) {
        myArray[i] = myArray[i - 1];
    }

    myArray[pos] = item;
    mySize++;

    for (int i = 0; i < mySize; i++) {
        cout << myArray[i] << " ";
    }
    cout << endl;
    return;
}
```

Assume that the following code is a part of a client program. Present the execution result. You can assume that **mySize** is initially 0. You can read about the **static array-based list** from section 6.2 of the book. Source code described in the book is available on the book's website (Figure 6.1).

```
List intList;

intList.insertnew(100, 0);
intList.insertnew(200, 2);
intList.insertnew(300, 0);
intList.insertnew(400, 2);
```

3. Consider the Linked Lists files available on iLearn (LinkedList.h, LinkedList.cpp and Sample\_LinkedList\_Tester.cpp). Write a member function to find the sum of the values in a linked list (**10 points**).