Hunt down deprecated classes from your browser

by Julien Déramond





Julien Déramond



Orange Design System tech lead



Bootstrap core team member



Open {re}Source and Advent of Open Source creator



Upgrading frameworks and libraries is never as simple as it

looks.

1 2 3

Semantic Versioning

1 . 2 . 3



Semantic Versioning



•

2

Major version

Breaking changes



Semantic Versioning

1

2

Major versior

Minor version

Breaking change

New features (non-breaking)



Semantic Versioning

2

•

3

Major versior

Minor version

Minor version

Breaking changes

New features (non-breaking

Fixes, docs typos (non-breaking)

It's not always that simple.

Let's dive into one Bootstrap example.

Framework Code

Simplified version of Bootstrap's code:

```
// Semantic token
$primary: blue;

// Component token
$btn-bg-primary: $primary;

// Component style
.btn-primary {
  background-color: $btn-bg-primary;
}
```

Framework Code

Simplified version of Bootstrap's code:

```
// Semantic token
$primary: blue;

// Component token
$btn-bg-primary: $primary;

// Component style
.btn-primary {
  background-color: $btn-bg-primary;
}
```

User Code

<button class="btn-primary">Primary button

Primary button

Framework Code

Not a real change but let's say we need to add and use a change-opacity function for whatever reason.

```
+ @function change-opacity($color, $opacity: 1) {
+ @return rgba($color, $opacity);
+ }

$primary: blue;
- $btn-bg-primary: $primary;
+ $btn-bg-primary: change-opacity($primary);

.btn-primary {
   background-color: $btn-bg-primary;
}
```

Framework Code

Not a real change but let's say we need to add and use a change-opacity function for whatever reason.

```
+ @function change-opacity($color, $opacity: 1) {
+ @return rgba($color, $opacity);
+ }

$primary: blue;
- $btn-bg-primary: $primary;
+ $btn-bg-primary: change-opacity($primary);

.btn-primary {
   background-color: $btn-bg-primary;
}
```

User Code

Basic user with the CDN version of Bootstrap.

<button class="btn-primary">Primary button

Primary button

Framework Code

Not a real change but let's say we need to add and use a change-opacity function for whatever reason.

```
+ @function change-opacity($color, $opacity: 1) {
+ @return rgba($color, $opacity);
+ }

$primary: blue;
- $btn-bg-primary: $primary;
+ $btn-bg-primary: change-opacity($primary);

.btn-primary {
   background-color: $btn-bg-primary;
}
```

User Code

Basic Sass user customizing a color to red.

```
// Overriding the semantic token
$primary: red;
<button class="btn-primary">Primary button</button>
```

Primary button

Framework Code

Not a real change but let's say we need to add and use a change-opacity function for whatever reason.

```
+ @function change-opacity($color, $opacity: 1) {
+ @return rgba($color, $opacity);
+ }

$primary: blue;
- $btn-bg-primary: $primary;
+ $btn-bg-primary: change-opacity($primary);

.btn-primary {
   background-color: $btn-bg-primary;
}
```

User Code

Advanced Sass user customizing a color to red with custom properties.

```
// Defining a custom property for the primary color
:root {
    --ds-primary: red;
}

// Overriding the semantic token
$primary: var(--ds-primary);

<button class="btn-primary">Primary button</button>
```





> 95% of users non-breaking

< 5% of users breaking

> 95% of users non-breaking

< 5% of users breaking

What do you do?

> 95% of users

non-breaking

< 5% of users

breaking

What do you do?

Is it a major, minor, or patch version?

> 95% of users non-breaking

< 5% of users breaking

What do you do?

- Is it a major, minor, or patch version?
- What if all your modifications are like that?

> 95% of users r

non-breaking

< 5% of users

breaking

What do you do?

- Is it a major, minor, or patch version?
- What if all your modifications are like that?
- Do we stay with a minor version 0 forever?





The maintainer's nightmare

Imagine maintaining a library with thousands or millions of users where every change is a potential landmine.

- Some users want rapid innovation.
- Others demand absolute stability.
- And everyone uses your library differently.





I've been asking myself this question a lot.



I've been asking myself this question a lot.

Maybe version numbers aren't as important as we think.

What truly matters is the migration process—how you move from one version to the next.



I've been asking myself this question a lot.

Maybe version numbers aren't as important as we think.

What truly matters is the migration processhow you move from one version to the next.

If a tool migrates your code, version numbers might lose their significance.

Unless you need to track when new features arrive, they might not be worth worrying about at all.



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?

Changelog.



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?

- Changelog.
- GitHub release.



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?

- Changelog.
- GitHub release
- Migration guides in the documentation.

Nobody Reads The Fabulous Manual.



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?

- Changelog.
- GitHub release
- Migration guides in the documentation.

Nobody Reads The Fabulous Manual

Create tools to spot breaking changes.

Scripts or IDE extensions.



Balancing innovation and stability.

Beyond that, how can we make sure migrations are smooth for everyone?

- Changelog.
- GitHub release
- Migration guides in the documentation.

Nobody Reads The Fabulous Manual

Create tools to spot breaking changes

Scripts or IDE extensions

Create tools to spot and fix your code.

Automated migrations by tools like Storybook

However, automated migrations tools:

are not always perfect,

and are hard to craft.

- can be costly to create, and maintain,

Especially when your core team is small and

working on the project in their spare time.



Experimentation

Sometimes, as maintainers, we need to explore, experiment, and have fun with new ideas.



Experimentation

Sometimes, as maintainers, we need to explore, experiment, and have fun with new ideas.

I stumbled upon a Bootstrap GitHub discussion mentioning an idea about a browser extension highlighting deprecated classes in websites.

And I gave it a try.



Experimentation


Sometimes, as maintainers, we need to explore, experiment, and have fun with new ideas.


l stumbled upon a Bootstrap GitHub discussion mentioning an idea about a browser extension highlighting deprecated classes in websites.

And I gave it a try.

julien-deramond/ bootstrap-deprecated-classesextension

Browser extension highlighting Bootstrap deprecated classes in websites

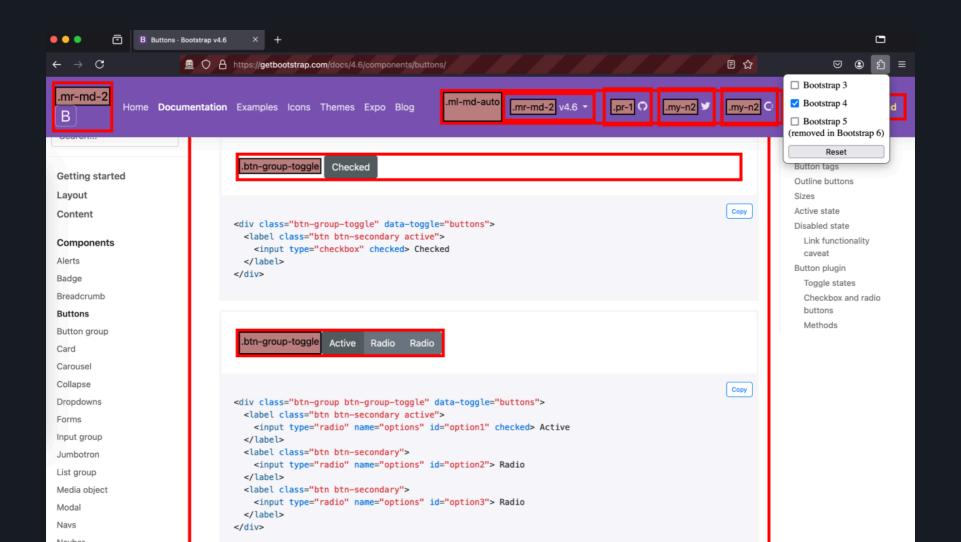

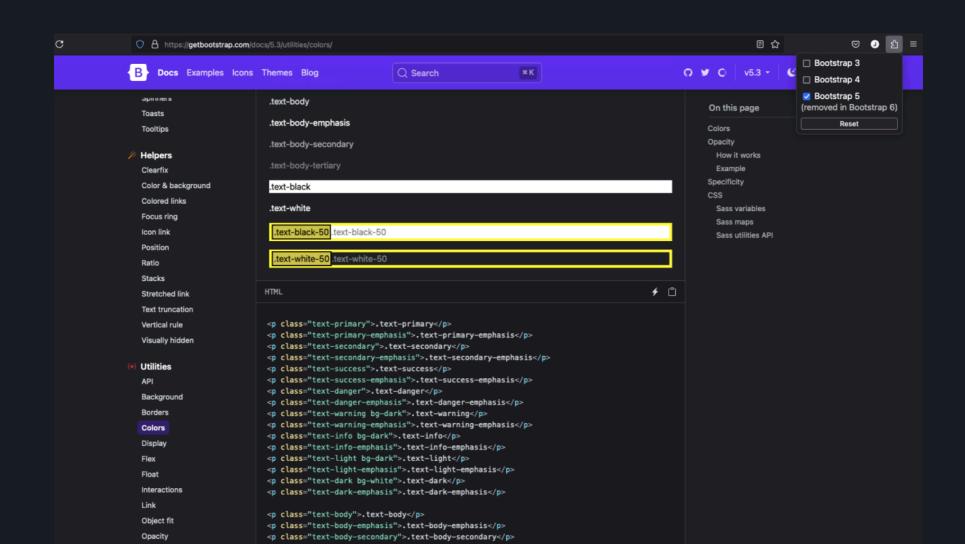



Here's how the extension works.

 Fetch the latest Bootstrap CDN versions of Bootstrap 4 and 5 CSS files.

Bootstrap 4

```
/*!
 * Bootstrap v4.6.2 (https://getbootstrap.com/)
 * Copyright 2011-2022 The Bootstrap Authors
 * Copyright 2011-2022 Twitter, Inc.
 * Licensed under MIT (https://github.com/twbs/bootstrap,
 */
:root {
   --blue: #007bff;
   --indigo: #6610f2;
```

Bootstrap 5

```
acharset "UTF-8";
/*!

* Bootstrap v5.3.3 (https://getbootstrap.com/)

* Copyright 2011-2024 The Bootstrap Authors

* Licensed under MIT (https://github.com/twbs/bootstrap,

*/
:root,
[data-bs-theme=light] {
   --bs-blue: #0d6efd;
   --bs-indigo: #6610f2;
```



Here's how the extension works.

- Fetch the latest Bootstrap CDN versions of Bootstrap 4 and 5 CSS files.
- 2. Parse, find, and order classes alphabetically in a JSON file.

Bootstrap 4

```
"classes": [
   ".accordion",
   ".active",
   ".alert",
   ".alert-danger",
   ".alert-dark",
   ".alert-dismissible",
   ".alert-heading",
```

Bootstrap 5

```
"classes": [
   ".accordion",
   ".accordion-body",
   ".accordion-button",
   ".accordion-collapse",
   ".accordion-flush",
   ".accordion-header",
   ".accordion-item",
```



Here's how the extension works.

- Fetch the latest Bootstrap CDN versions of Bootstrap 4 and 5 CSS files.
- 2. Parse, find, and order classes alphabetically in a JSON file.
- 3. Remove common classes. Generate a JSON file listing removed classes for Bootstrap 4.

```
'removed": [
  '.arrow",
  '.badge-danger",
 ".badge-dark",
  '.badge-info",
  '.badge-light",
 ".badge-pill",
 ".badge-primary",
  .badge-secondary",
'added": [
 ".accordion-body",
  .accordion-button",
  .accordion-collapse",
  .accordion-flush",
  .accordion-header",
  .accordion-item",
  .align-content-xxl-around",
  .align-content-xxl-between",
```



Here's how the extension works.

- Fetch the latest Bootstrap CDN versions of Bootstrap 4 and 5 CSS files.
- 2. Parse, find, and order classes alphabetically in a JSON file.
- 3. Remove common classes. Generate a JSON file listing removed classes for Bootstrap 4.
- 4. Loop over the arrays of classes, and create a stylesheet to highlight removed classes in red.

```
.bootstrap-browser-extension-bs-4 {
 .arrow {
   border: 5px solid red;
   border-radius: 0;
   8::before {
     color: #000:
     background-color: rgb(189, 127, 127);
     padding: 2px;
     border: 2px solid black;
     z-index: 10000;
     content: '.arrow
```



Here's how the extension works.

- Fetch the latest Bootstrap CDN versions of Bootstrap 4 and 5 CSS files.
- 2. Parse, find, and order classes alphabetically in a JSON file.
- 3. Remove common classes. Generate a JSON file listing removed classes for Bootstrap 4.
- 4. Loop over the arrays of classes, and create a stylesheet to highlight removed classes in red.
- 5. Each time we click on a checkbox, we inject the
 .bootstrap-browser-extension-bs{number} class in page's <body>.

```
<!DOCTYPE html>
<html lang="en">
    <head></head>
    <body
        class="bg-body bootstrap-browser-extension-bs-4"
        >
        </body>
        </html>
```

from one version to another.

The tool is rather handy while you're migrating

 \langle

The tool is rather handy while you're migrating from one version to another.

Beyond Just Migration

Context at Orange our web framework is a fork of Bootstrap. So removed and deprecated classes are almost the same.

Beyond Just Migration

Context at Orange our web framework is a fork of Bootstrap. So removed and deprecated classes are almost the same.

A usage I didn't expect

Beyond Just Migration

Context at Orange our web framework is a fork of Bootstrap. So removed and deprecated classes are almost the same.

A usage I didn't expect

This extension is a **design system audit tool!**

Beyond Just Migration

Context at Orange our web framework is a fork of Bootstrap. So removed and deprecated classes are almost the same.

A usage I didn't expect

This extension is a **design system audit tool!**

I can spy whether Orange websites have migrated to the latest version of Boosted just by visiting them.

Beyond Just Migration


Context at Orange our web framework is a fork of Bootstrap. So removed and deprecated classes are almost the same.

A usage I didn't expect

This extension is a **design system audit tool!**

I can spy whether Orange websites have migrated to the latest version of Boosted just by visiting them.

And without any source code access.

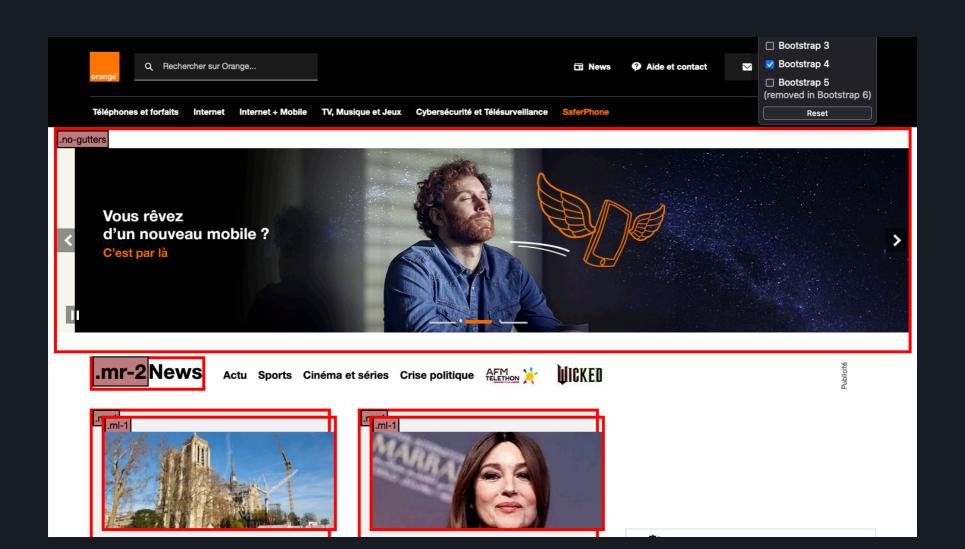



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.

 Create an extension for your design system library of components



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.

- Create an extension for your design system library of components
- Add some features

Automatic issue creation, screenshots + webhook, links to the documentation



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.

- Create an extension for your design system library of components
- Add some features

Automatic issue creation, screenshots + webhook, links
to the documentation

Make it install by your developers



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.

- Create an extension for your design system library of components
- Add some features
 Automatic issue creation, screenshots + webhook, link
 - to the documentation
- Make it install by your developers
- Create a generic extension to upload a JSON file with classes



You probably don't use Bootstrap, but reuse the idea, the code, adapt it, and make it your own. It's Open Source under the MIT license.

- Create an extension for your design system library of components
- Add some features

Automatic issue creation, screenshots + webhook, links to the documentation

- Make it install by your developers
- Create a generic extension to upload a JSON file with classes
- Do the same thing in a Storybook addon



Closing: An Invitation

Open Source is about sharing and collaboration.

Hope it inspires you to create your own tools with other ideas for your library, your design system, or your favorite framework.

Let's make the migration process easier for everyone. \bigcirc



Thank you!

Presentation under the CC BY-SA 4.0 license

