Printed by: aljusti@ufpr.br. Printing is for personal, private use only. No part of this book may be reproduced or transmitted without publisher's prior permission. Violators will be prosecuted.

Momentos fletores

$$M_x = \frac{12 \times 4{,}6^2}{76{,}9} = 3{,}30 \text{ kNm} \qquad M_y = \frac{12 \times 4{,}6^2}{45{,}8} = 5{,}54 \text{ kNm}$$

$$X_x = \frac{12 \times 4{,}6^2}{22{,}2} = 11{,}43 \text{ kNm}$$


Cargas nas vigas:

$$R_1 = 0{,}278 \times 12 \times 4{,}6 = 15{,}34 \text{ kN/m} \qquad R_2 = 0{,}144 \times 12 \times 4{,}6 = 7{,}95 \text{ kN/m}$$

Flecha: $w = 83{,}364$

$$f = \frac{q \cdot \ell_x^4}{E_C \cdot h^3 \cdot w} = f = \frac{12 \times 4{,}6^4}{21.287.000 \times 0{,}08^3 \times 83{,}364} = 0{,}00591 \text{ m} = 0{,}591 \text{ cm}$$

4º caso — lajes com dois lados contínuos engastados — T-9

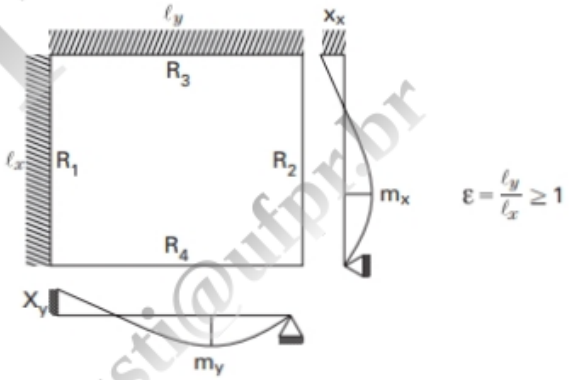

ε=ℓy/ℓx	m_x	m_y	n_x	n_y	v_1	v_2	v_3	v_4	w
1,0	40,2	40,2	14,3	14,3	0,317	0,183	0,317	0,183	39,683
1,1	35,1	41,3	12,7	13,6	0,317	0,183	0,346	0,200	33,156
1,2	30,0	44,0	11,5	13,1	0,317	0,183	0,370	0,214	28,706
1,3	26,5	47,7	10,7	12,8	0,317	0,183	0,390	0,225	25,745
1,4	24,0	51,0	10,1	12,6	0,317	0,183	0,714	0,131	23,451
1,5	22,2	52,9	9,6	12,4	0,317	0,183	0,423	0,244	21,707
1,6	20,9	55,0	9,2	12,3	0,317	0,183	0,436	0,252	20,620
1,7	19,8	56,6	9,0	12,3	0,317	0,183	0,447	0,258	19,955
1,8	19,0	57,7	8,7	12,2	0,317	0,183	0,458	0,264	19,441
1,9	18,4	59,1	8,6	12,2	0,317	0,183	0,467	0,270	18,716
2,0	17,9	60,2	8,4	12,2	0,317	0,183	0,475	0,275	17,857

DO NOT COPY aljusti@ufpr.br