

Introducción Power Automate Cloud

Jonatan Andrés Londoño Taborda

Correo: andreess891@gmail.com

Cel: 300 7759629



The low code platform that spans Microsoft 365, Azure, Dynamics 365, and standalone apps.



Power BI
Business analytics



Power Apps
App development



Power Automate
Process automation



Power Virtual Agents
Intelligent virtual agents



Power Pages
External-facing websites



Data connectors



AI Builder



Dataverse

Microsoft Power Automate

Conectores de datos

Orígenes de datos

Conectores

Desencadenadores y acciones

Conectores personalizados

Microsoft Power Automate

¿Qué puede hacer con Power Automate?

Puede utilizar Power Automate para automatizar flujos de trabajo entre sus aplicaciones y servicios favoritos, sincronizar archivos, recibir notificaciones, recopilar datos y mucho más.

Por ejemplo, puede automatizar estas tareas:

- Responder al instante a notificaciones o correos electrónicos de prioridad alta.
- Copiar todos los archivos adjuntos de correo electrónico en su cuenta de OneDrive para la Empresa.
- Automatizar flujos de trabajo de aprobación.

Un uso común de Power Automate es recibir notificaciones. Por ejemplo, puede recibir al instante un mensaje de correo electrónico o una notificación de inserción en el teléfono cada vez que se agregue un cliente potencial a Dynamics 365 o Salesforce.

Microsoft Power Automate

Enviar recordatorio por correo

Start from blank ⓘ



Automated cloud flow

Triggered by a designated event.



Instant cloud flow

Triggered manually as needed.



Scheduled cloud flow

You choose when and how often it runs.



Describe it to design it

Describe the flow you want and AI builds it for you



Desktop flow

Automates processes on your desktop environment.



Process mining

Evaluate and optimize your existing processes and tasks.





Recurrence



Send an email (V2)

Microsoft Power Automate

Plantillas

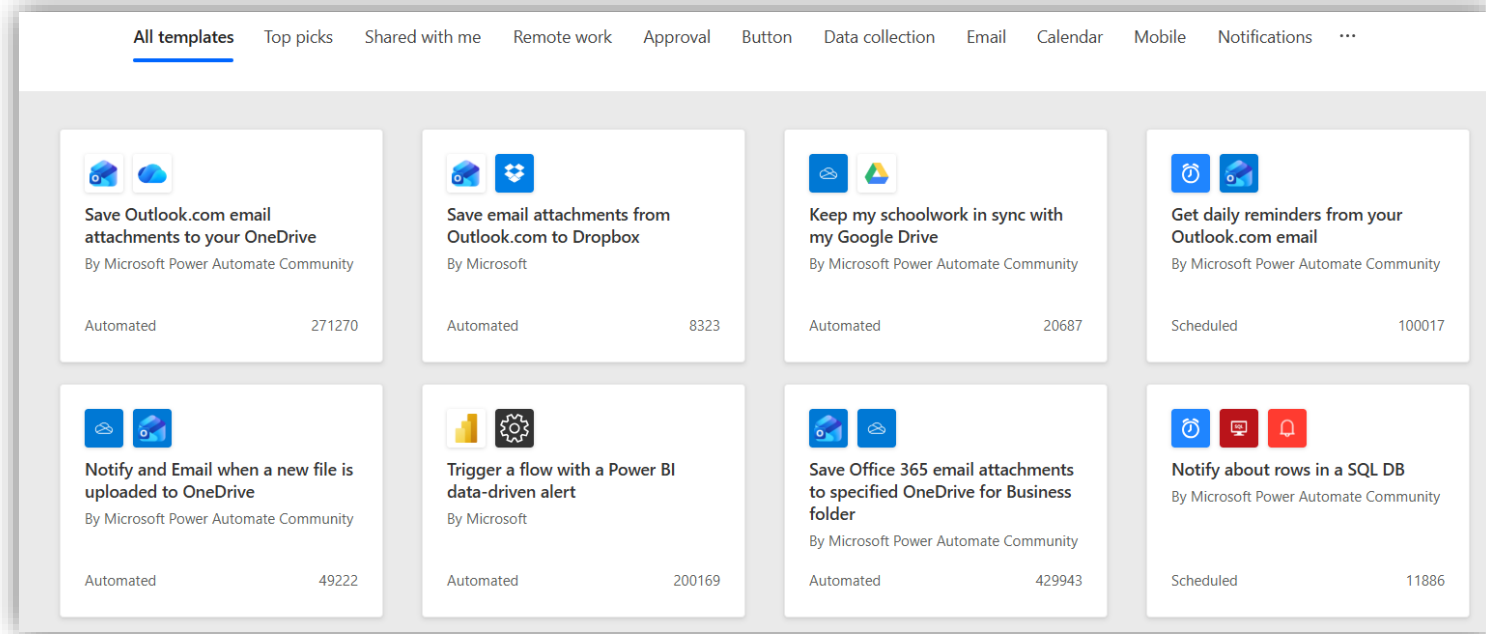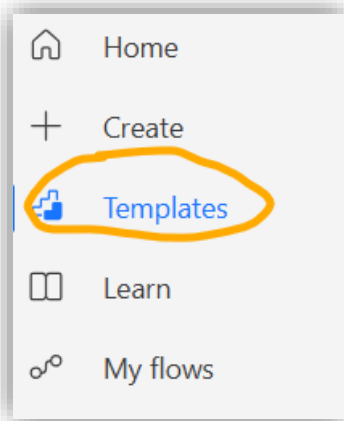

Microsoft Power Automate

Enviar correo electrónico cuando se agregue un elemento de lista de SharePoint

The screenshot displays the Microsoft Power Automate interface. On the left, the 'Send an email (V2)' action is configured in the 'Parameters' tab. The 'To' field contains 'pepito@gmail.com'. The 'Subject' field is 'Nuevo cliente creado'. The 'Body' field contains 'Hola [Display Name]' and 'Un nuevo cliente ha sido creado en'. The 'Sensitivity' field is set to 'Sensitivity'. On the right, the flow canvas shows a sequence of three steps: 'When an item is created' (trigger), 'Get my profile (V2)' (action), and 'Send an email (V2)' (action). The 'Send an email (V2)' step is highlighted with a blue border.

Back | Untitled flow

Send an email (V2)

Parameters Settings Code view Testing About

To *

pepito@gmail.com

Enter part of a name or email address to find more people

Subject *

Nuevo cliente creado

Body *

Hola [Display Name]

Un nuevo cliente ha sido creado en

Sensitivity

Sensitivity


When an item is created

Get my profile (V2)


Send an email (V2)

Microsoft Power Automate

Iniciar una aprobación cuando se diligencie un formulario de Windows Forms y enviar correo

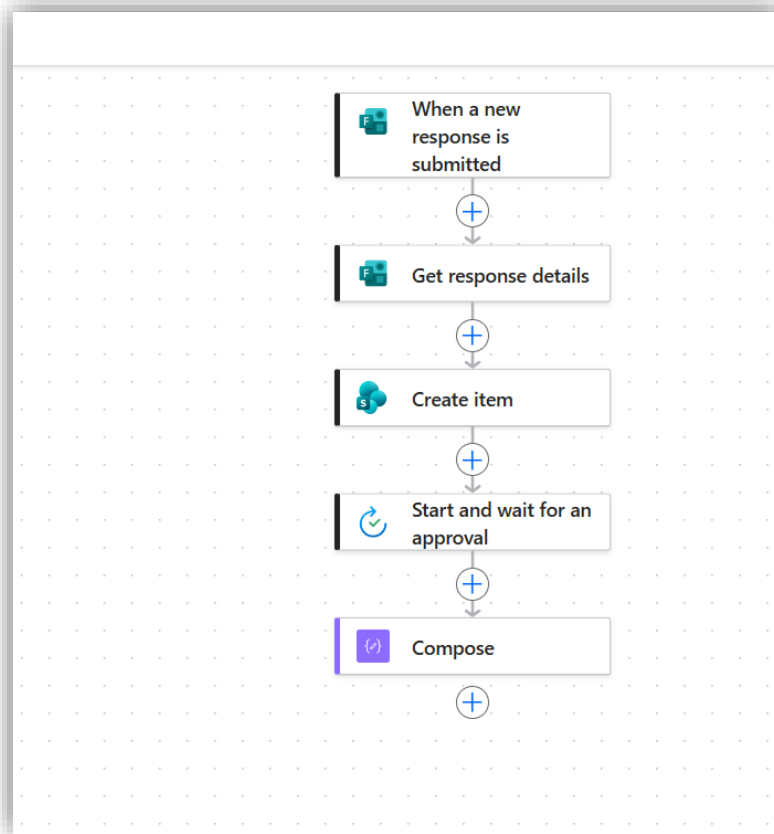


Condicional
Prueba lógica=

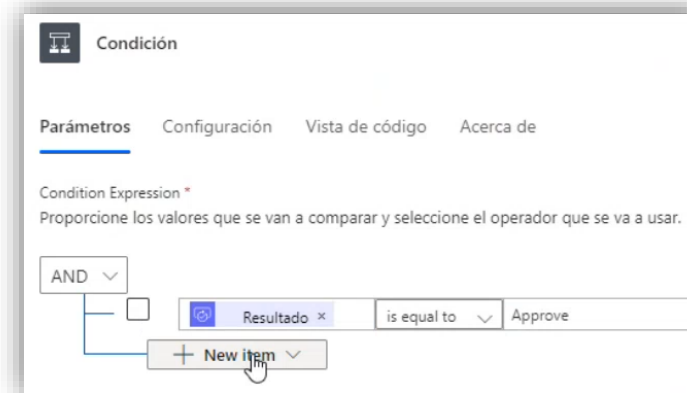


Microsoft Power Automate

Iniciar una aprobación cuando se diligencie un formulario de Windows Forms y enviar correo

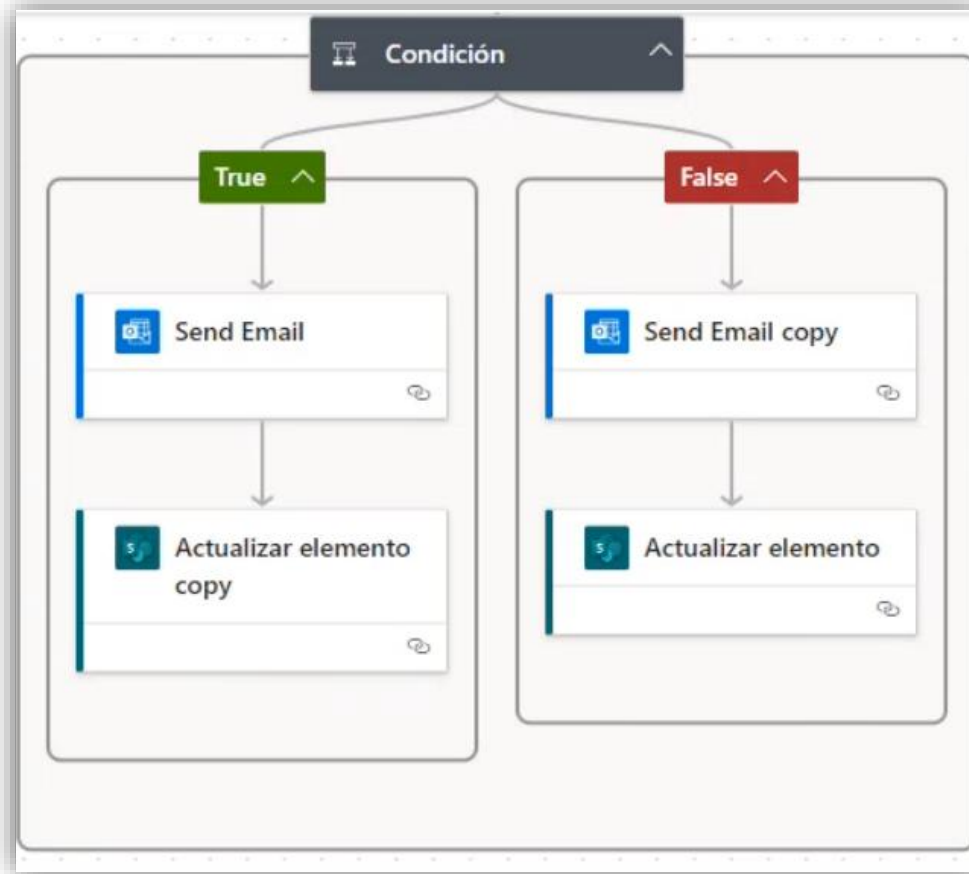


Microsoft Power Automate

Enviar tabla de Excel en cuerpo de correo

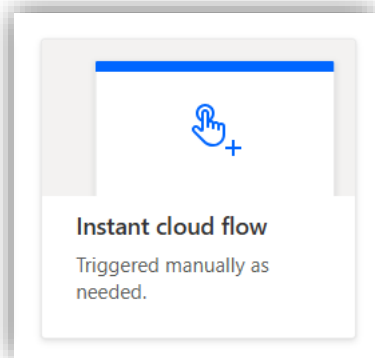

Build an instant cloud flow

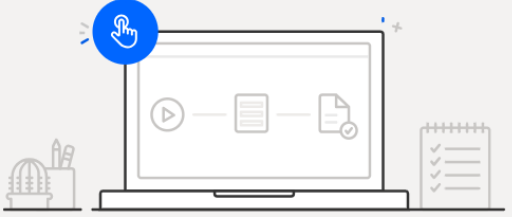

Triggered manually from any device, easy-to-share instant flows automate tasks so you don't have to repeat yourself.

Examples:

- Get an automatic mobile alert whenever a VIP client emails you
- Save all your email attachments to a folder automatically

Flow name

Enviar tabla de reuniones

Choose how to trigger this flow *

☒	 Manually trigger a flow Manually trigger a flow	
☐	 When Power Apps calls a flow (V2) Power Apps	
☐	 When an agent calls the flow Skills	
☐	 When Power Virtual Agents calls a fl... Power Virtual Agents	
☐	 When a flow step is run from a busin... Microsoft Dataverse	
☐	 When a row is selected Microsoft Dataverse	
☐	 For a selected message (V2)	

Skip

Create

Cancel

Microsoft Power Automate

Enviar tabla de Excel en cuerpo de correo

The screenshot displays the Microsoft Power Automate interface. At the top, the header includes the UNAULA logo, the text "Power Automate", and a search bar labeled "Search for helpful resources". Below the header, a breadcrumb trail shows "Back" and "Enviar tabla de reuniones". The main workspace is divided into two panels. The left panel, titled "List rows present in a table", contains tabs for "Parameters", "Settings", "Code view", "Testing", and "About". The "Parameters" tab is active, showing configuration fields: "Location *" with a dropdown menu set to "Group - 2026 2 - Automatizaciones", "Document Library *" with a dropdown menu set to "Materiales de clase", "File *" with a text input field containing "/Clase 2/Visitas o Reuniones.xlsx" and a folder icon, and "Table *" with a dropdown menu set to "TVisitas". The right panel shows a visual flow diagram on a grid. It begins with a "Manually trigger a flow" step, followed by a connector arrow, and then the "List rows present in a table" step, which is highlighted with a blue border. A plus sign in a circle is visible below the second step, indicating where to add more actions.

Microsoft Power Automate

Enviar tabla de Excel en cuerpo de correo

The screenshot displays the Microsoft Power Automate interface. At the top, the header includes the UNAULA logo, the text "Power Automate", and a search bar. Below the header, the flow is titled "Enviar tabla de reuniones".

On the left, the "Create HTML table" action is configured. It has tabs for "Parameters", "Settings", "Code view", and "About". The "Parameters" tab is active, showing a "From" field with the value "body/value". Below this, the "Advanced parameters" section shows "Showing 1 of 1". The "Columns" section is set to "Custom". A table is defined with the following columns:

Header	Value
Funcionario	Funcionario
Fecha Visita	Fecha
Observaciones	Observaciones
Enter key	Enter value

On the right, the flow canvas shows a sequence of three steps: "Manually trigger a flow", "List rows present in a table", and "Create HTML table". The "Create HTML table" step is highlighted with a blue border.

Microsoft Power Automate

Enviar tabla de Excel en cuerpo de correo

The screenshot displays the Microsoft Power Automate interface. The top navigation bar includes the UNAULA logo, the text "Power Automate", and a search bar. The main header shows a back arrow and the flow name "Enviar tabla de reuniones".

On the left, the "Send an email (V2)" action is selected, with tabs for "Parameters", "Settings", "Code view", "Testing", and "About". The "Parameters" tab is active, showing the following fields:

- To ***: A dropdown menu with "Esp. Analítica de Datos Segundo Semestre G2" selected.
- Subject ***: A text field containing "Tablas de vista".
- Body ***: A rich text editor with the text "Cordial saludo" and "Las visitas para hoy son:". Below the text is an "Outputs" button.
- Sensitivity**: A dropdown menu with "Sensitivity" selected.

On the right, the flow canvas shows a sequence of steps connected by arrows:

- Manually trigger a flow
- List rows present in a table
- Create HTML table
- Compose
- Send an email (V2)

Microsoft Power Automate

Enviar tareas de Excel a Planner

List rows present in a table

Parameters Settings Code view Testing About

Location *
Group - 2026 2 - Automatizaciones

Document Library *
Materiales de clase

File *
/Clase 2/Tareas para Planer2.xlsx

Table *
TPlaner

Extract Sensitivity Label
A boolean whether to extract sensitivity label id for associated artefact.

Sensitivity Label Metadata
A boolean whether to fetch sensitivity label Metadata for associated Labelid.

Advanced parameters
Showing 6 of 6 Show all Clear all

Filter Query
An ODATA filter query to restrict the entries returned.

Order By
An ODATA orderBy query for specifying the order of entries.

Top Count
Total number of entries to retrieve (default = all).

Skip Count
The number of entries to skip (default = 0).

Select Query
Comma-separated list of columns to retrieve (first 500 by default).

DateTime Format
ISO 8601

Back Enviar tabla de reuniones

Create a task

Parameters Settings Code view Testing About

Group Id *
2026 2 - Automatizaciones

Plan Id *
Prueba Planner

Title *
Tarea X

Advanced parameters
Showing 29 of 29 Show all Clear all

Bucket Id
To do

Start Date Time
Fecha Inicio X

Due Date Time
Fecha Fin X

Assigned User Ids
Encargado X

Manually trigger a flow

List rows present in a table

Apply to each

Create a task




Microsoft Power Automate

Guardar adjuntos de correo en OneDrive

REALIZAR EL EJERCICIO DE FORMA INDIVIAL O EN EQUIPOS

Microsoft Power Automate

Guardar adjuntos de correo en OneDrive

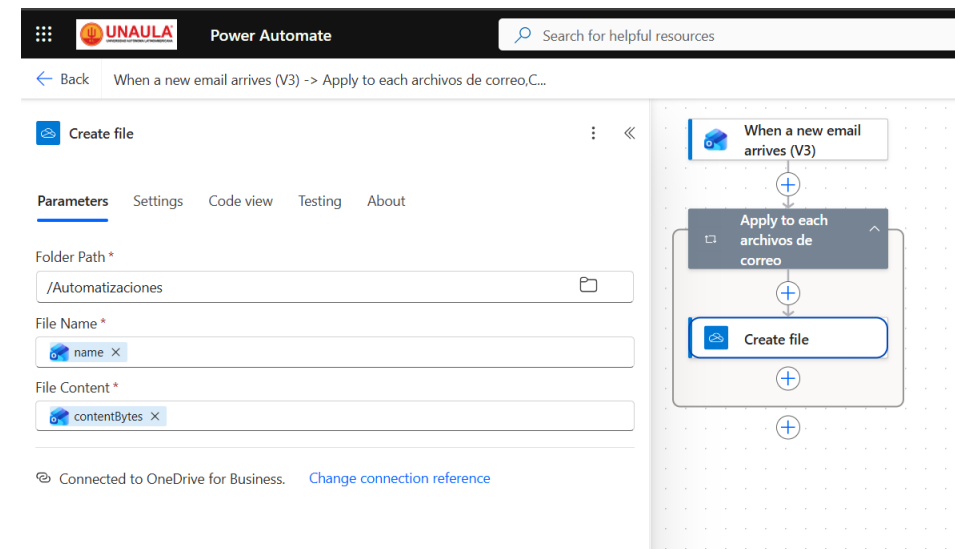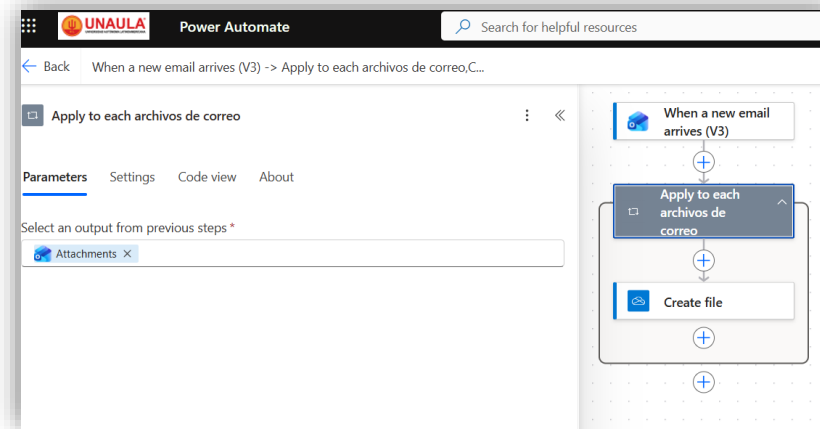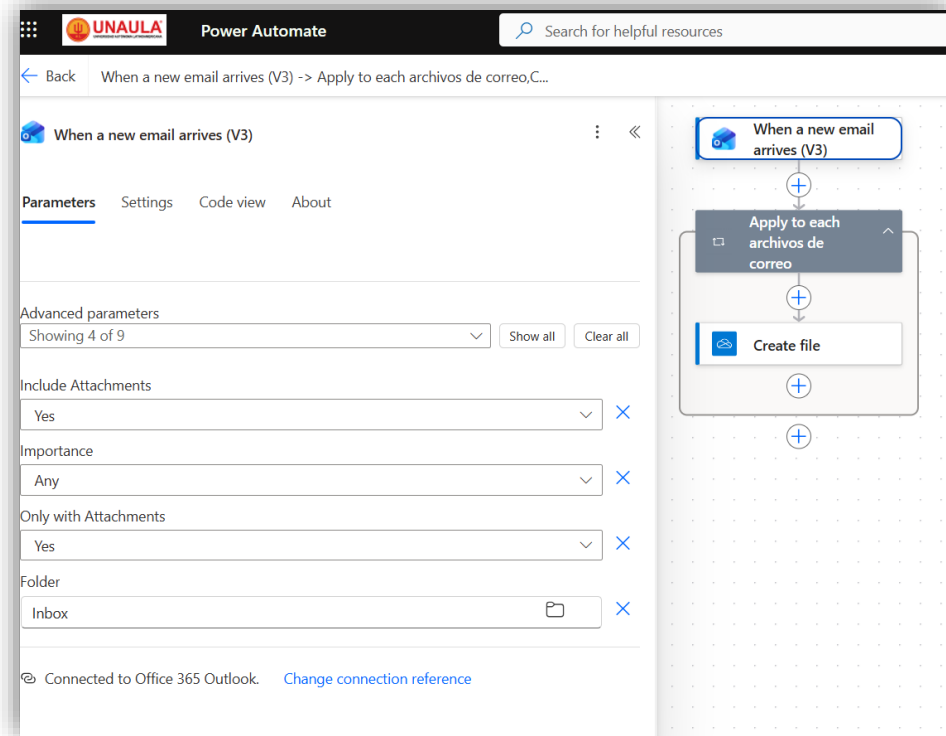




Microsoft Power Automate

Guardar adjuntos de correo en OneDrive – aplicar validación para guardar solo adjuntos que contengan la palabra “Visitas”

REALIZAR EL EJERCICIO DE FORMA INDIVIDUAL O EN EQUIPOS

Microsoft Power Automate

Guardar adjuntos de correo en OneDrive – aplicar validación para guardar solo adjuntos que contengan la palabra “Visitas”

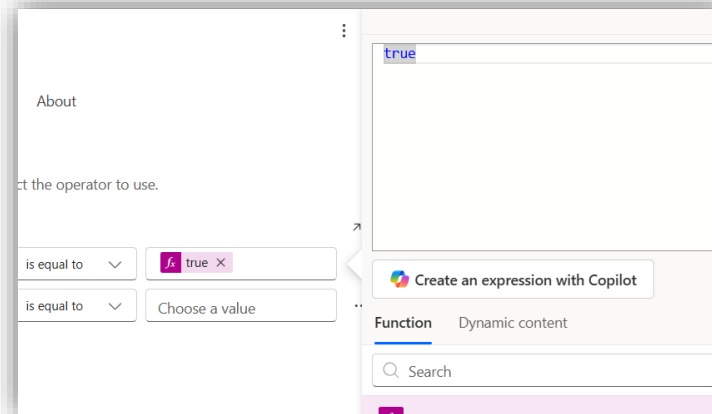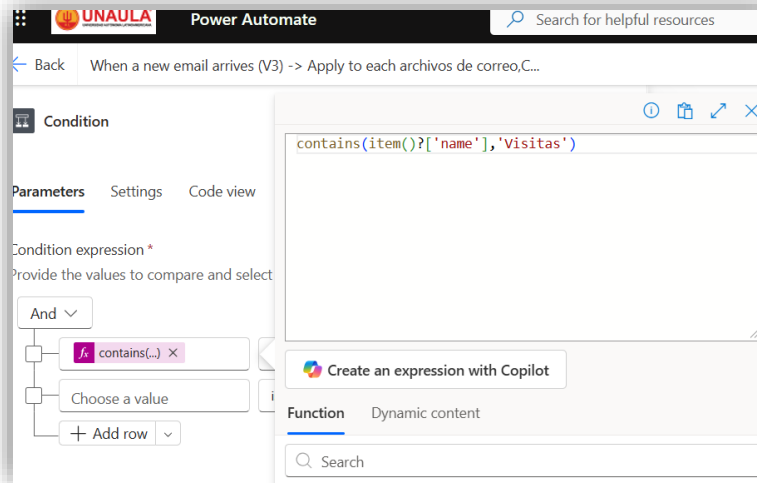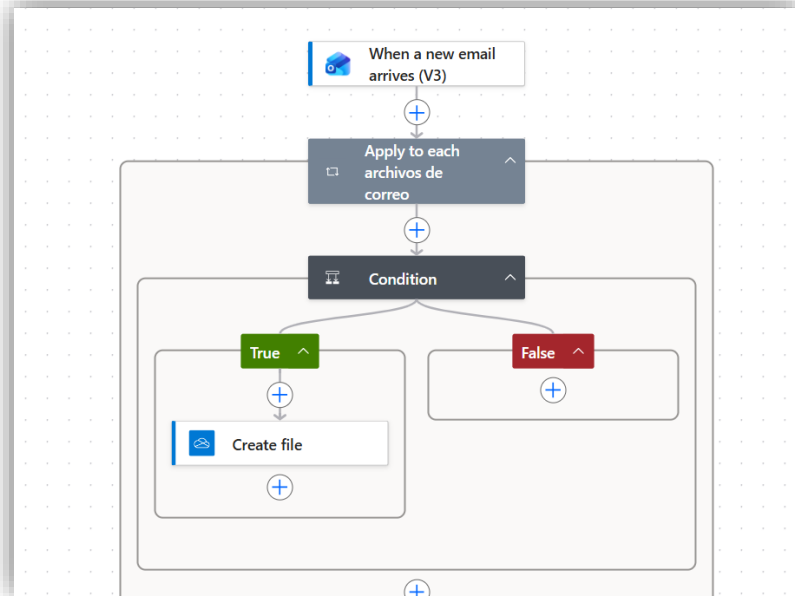

Microsoft Power Automate

Guardar adjuntos de correo en OneDrive – aplicar validación para guardar solo adjuntos que contengan la palabra “Visitas”

REALIZAR EL EJERCICIO DE FORMA INDIVIDUAL O EN EQUIPOS

Microsoft Power Automate

Crear API

The screenshot shows the configuration page for a 'manual' trigger in Microsoft Power Automate. The left sidebar contains tabs for 'Parameters', 'Settings', 'Code view', and 'About'. The 'Parameters' tab is active, showing fields for 'Who can trigger the flow?' (set to 'Anyone'), 'HTTP URL' (a long alphanumeric string), and 'Request Body JSON Schema' (a JSON object with 'id' as an integer and 'pregunta' as a string). Below these is a link 'Use sample payload to generate schema'. At the bottom, there are 'Advanced parameters' (showing 1 of 2) and a 'Method' dropdown set to 'POST'.

The screenshot shows the configuration page for a 'Parse JSON' action in Microsoft Power Automate. The left sidebar has tabs for 'Parameters', 'Settings', 'Code view', and 'About'. The 'Parameters' tab is active, showing 'Content' as 'Body' and a 'Schema' field containing a JSON object with 'id' as an integer and 'pregunta' as a string. A link 'Use sample payload to generate schema' is visible below the schema field. The right pane shows a visual flow diagram with a 'manual' trigger followed by the 'Parse JSON' action.

The screenshot shows the configuration page for a 'Response' action in Microsoft Power Automate. The left sidebar has tabs for 'Parameters', 'Settings', 'Code view', and 'About'. The 'Parameters' tab is active, showing 'Status Code' as '200', 'Headers' (empty), and 'Body' (a JSON object with 'respuesta' as 'Correo enviado'). At the bottom, 'Advanced parameters' are shown as 'Showing 0 of 1'. The right pane shows a visual flow diagram with a 'manual' trigger, a 'Parse JSON' action, a 'Send an email (V2)' action, and the 'Response' action.