

Laboratório 03 - Sprint 03


Guilherme Roberto,
João Victor
Jully Ketely




BACKEND



ESTRUTURA - BACKEND

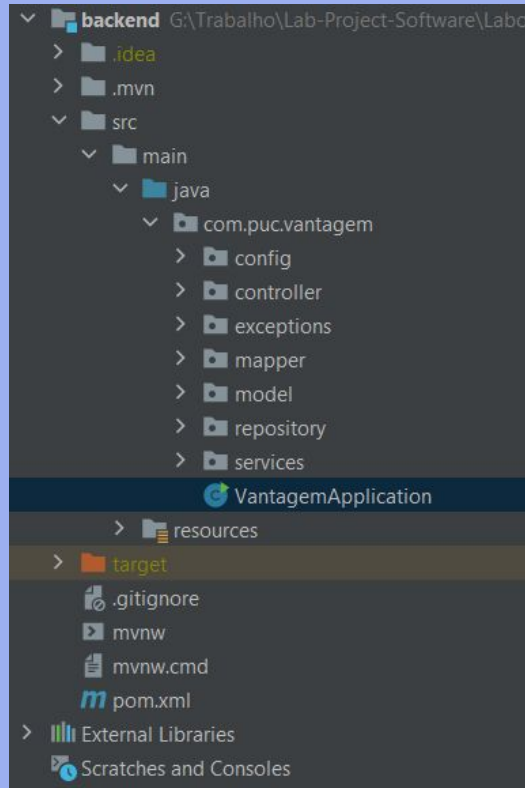

BACKEND

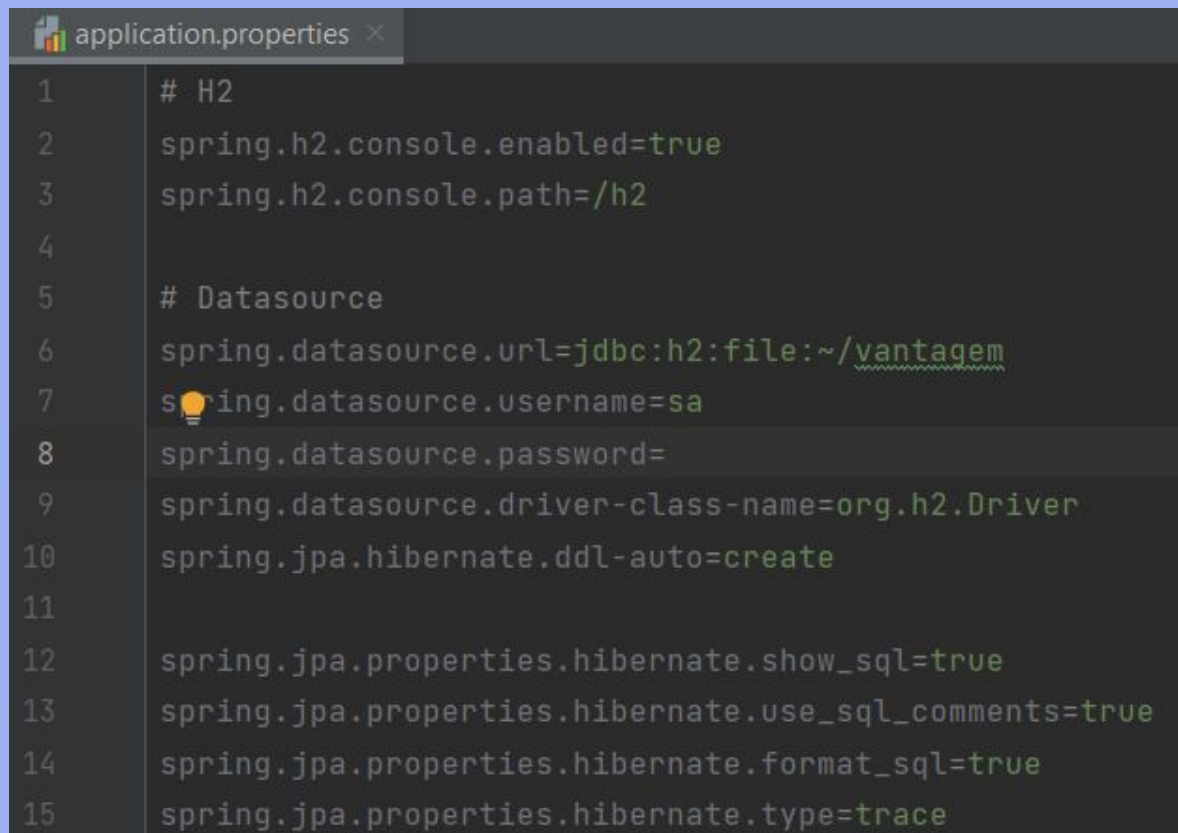
A screenshot of a code editor window titled 'application.properties'. The editor has a dark background with light-colored text. The code is organized into sections with comments. Line 1 has a comment '# H2'. Lines 2 and 3 set 'spring.h2.console.enabled=true' and 'spring.h2.console.path=/h2' respectively. Line 4 is empty. Line 5 has a comment '# Datasource'. Lines 6, 7, and 8 set 'spring.datasource.url=jdbc:h2:file:~/vantagem', 'spring.datasource.username=sa', and 'spring.datasource.password=' respectively. Line 9 sets 'spring.datasource.driver-class-name=org.h2.Driver'. Line 10 sets 'spring.jpa.hibernate.ddl-auto=create'. Line 11 is empty. Lines 12, 13, 14, and 15 set 'spring.jpa.properties.hibernate.show_sql=true', 'spring.jpa.properties.hibernate.use_sql_comments=true', 'spring.jpa.properties.hibernate.format_sql=true', and 'spring.jpa.properties.hibernate.type=trace' respectively. There is a small yellow lightbulb icon next to line 7.

```
1  # H2
2  spring.h2.console.enabled=true
3  spring.h2.console.path=/h2
4
5  # Datasource
6  spring.datasource.url=jdbc:h2:file:~/vantagem
7  spring.datasource.username=sa
8  spring.datasource.password=
9  spring.datasource.driver-class-name=org.h2.Driver
10 spring.jpa.hibernate.ddl-auto=create
11
12 spring.jpa.properties.hibernate.show_sql=true
13 spring.jpa.properties.hibernate.use_sql_comments=true
14 spring.jpa.properties.hibernate.format_sql=true
15 spring.jpa.properties.hibernate.type=trace
```

BACKEND



BANCO DE DADOS - BACKEND

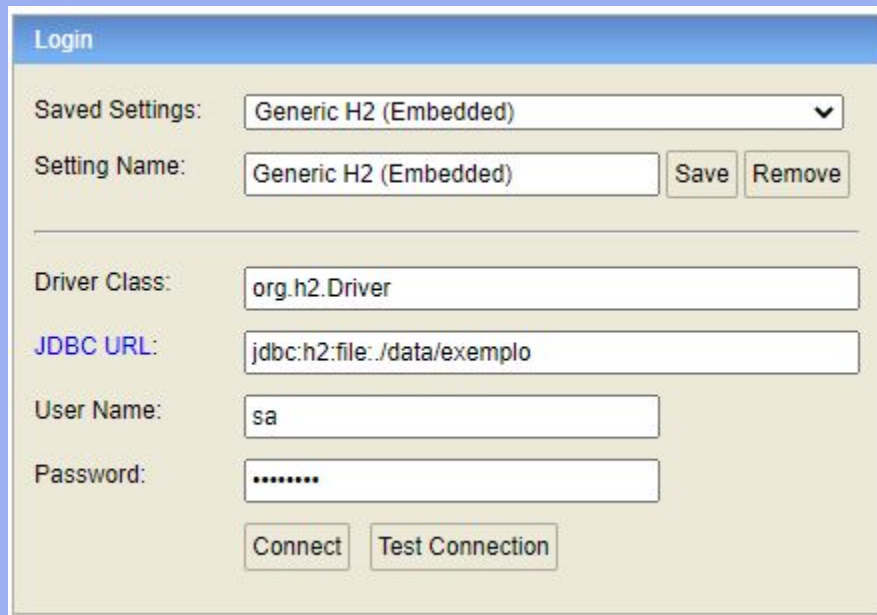

The image shows a 'Login' dialog box for database configuration. It features a blue title bar with the text 'Login'. Below the title bar, there are several input fields and buttons. The 'Saved Settings' section includes a dropdown menu currently showing 'Generic H2 (Embedded)'. Below this, the 'Setting Name' field also contains 'Generic H2 (Embedded)', with 'Save' and 'Remove' buttons to its right. A horizontal line separates this section from the configuration fields below. The 'Driver Class' field is set to 'org.h2.Driver'. The 'JDBC URL' field contains 'jdbc:h2:file:./data/exemplo'. The 'User Name' field is set to 'sa', and the 'Password' field is masked with seven dots. At the bottom, there are two buttons: 'Connect' and 'Test Connection'.

Login

Saved Settings: Generic H2 (Embedded) ▼

Setting Name: Generic H2 (Embedded) Save Remove

Driver Class: org.h2.Driver


JDBC URL: jdbc:h2:file:./data/exemplo

User Name: sa


Password:

Connect Test Connection

FRONTEND

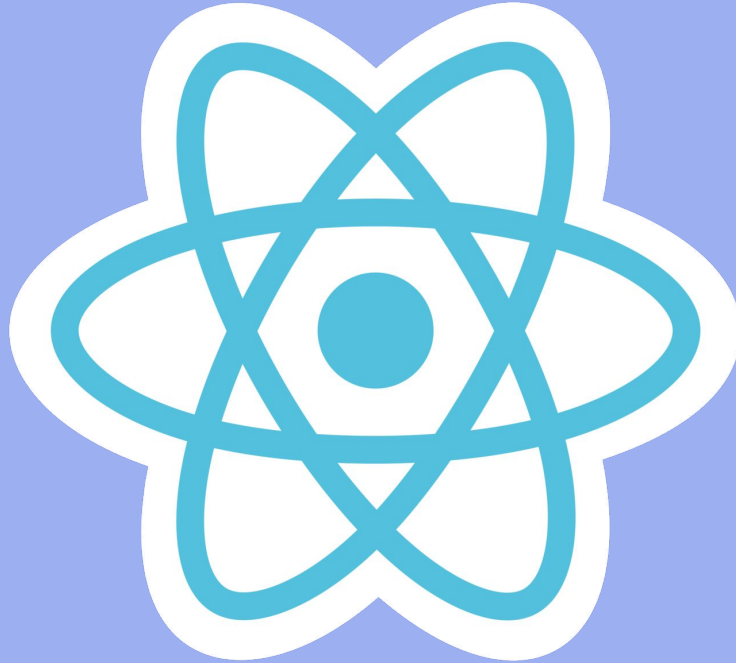

FRONTEND

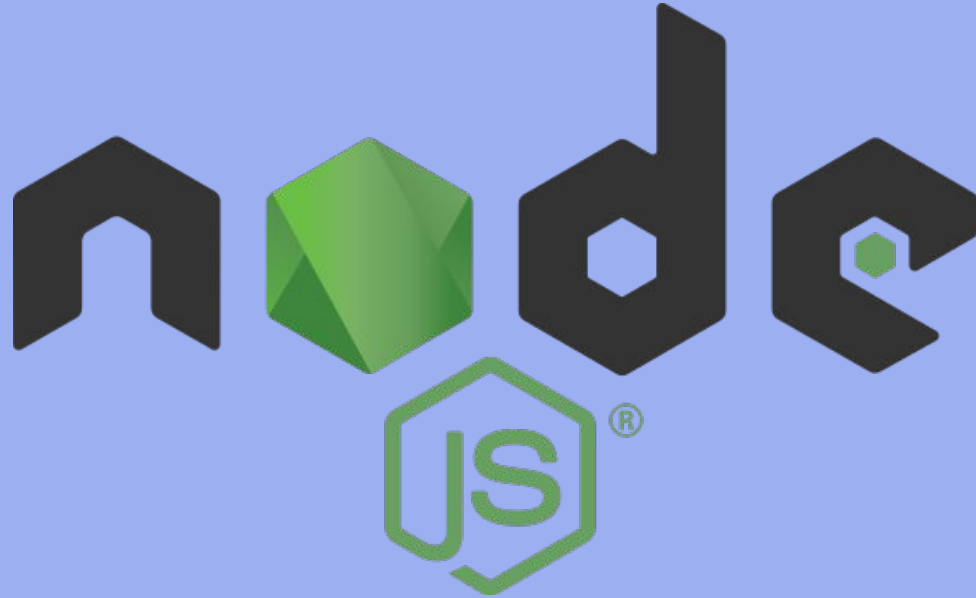

FIM !

