


# Laboratório 03 - Sprint 03


Guilherme Roberto,  
João Victor  
Jully Ketely




# BACKEND

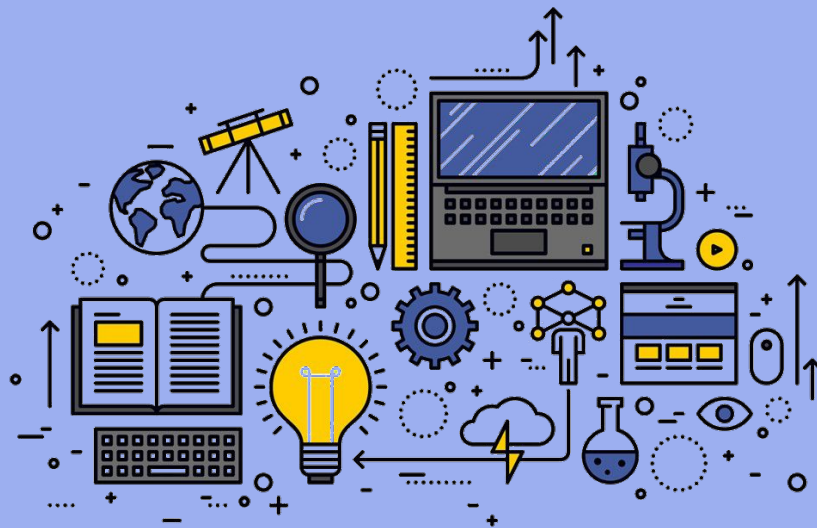

# ESTRUTURA - BACKEND

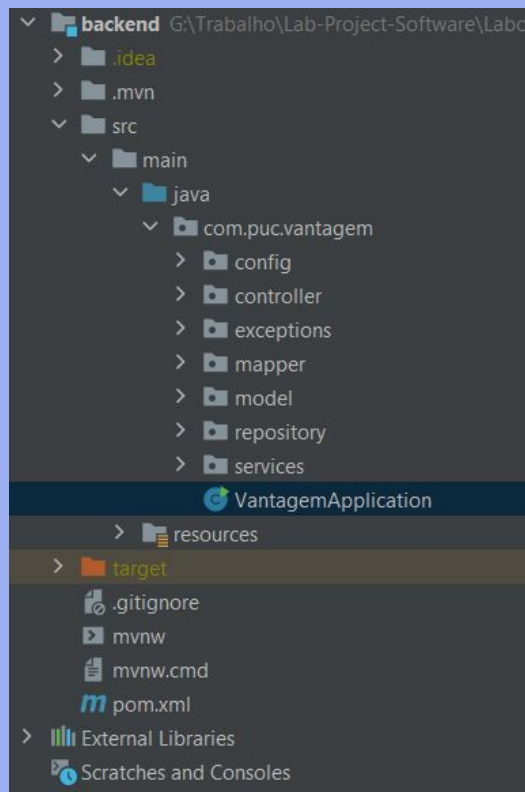

# BACKEND

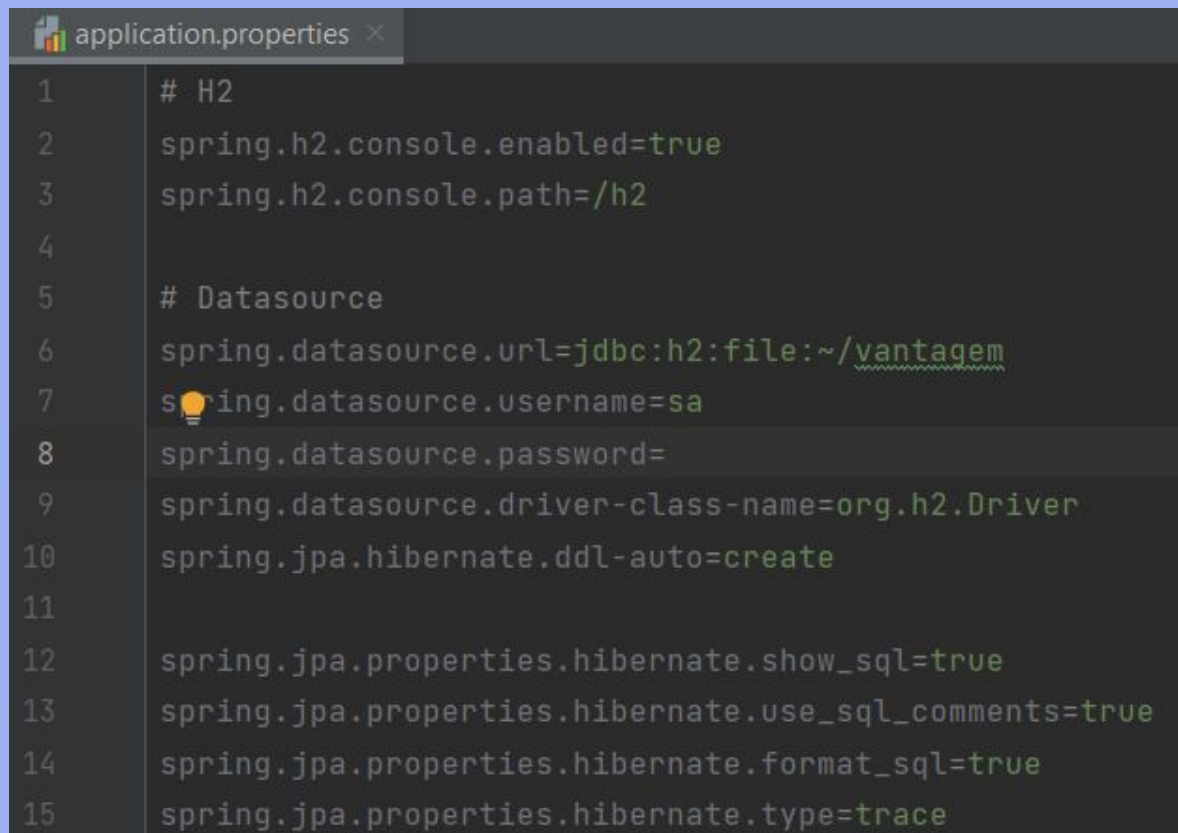A screenshot of a code editor window titled 'application.properties'. The editor has a dark background with light-colored text. The code is organized into sections with comments. Line 1 has a comment '# H2'. Lines 2 and 3 set 'spring.h2.console.enabled=true' and 'spring.h2.console.path=/h2' respectively. Line 4 is empty. Line 5 has a comment '# Datasource'. Lines 6, 7, and 8 set 'spring.datasource.url=jdbc:h2:file:~/vantagem', 'spring.datasource.username=sa', and 'spring.datasource.password=' respectively. Line 9 sets 'spring.datasource.driver-class-name=org.h2.Driver'. Line 10 sets 'spring.jpa.hibernate.ddl-auto=create'. Line 11 is empty. Lines 12, 13, 14, and 15 set 'spring.jpa.properties.hibernate.show\_sql=true', 'spring.jpa.properties.hibernate.use\_sql\_comments=true', 'spring.jpa.properties.hibernate.format\_sql=true', and 'spring.jpa.properties.hibernate.type=trace' respectively. There is a small yellow lightbulb icon next to line 7.

```
1  # H2
2  spring.h2.console.enabled=true
3  spring.h2.console.path=/h2
4
5  # Datasource
6  spring.datasource.url=jdbc:h2:file:~/vantagem
7  spring.datasource.username=sa
8  spring.datasource.password=
9  spring.datasource.driver-class-name=org.h2.Driver
10 spring.jpa.hibernate.ddl-auto=create
11
12 spring.jpa.properties.hibernate.show_sql=true
13 spring.jpa.properties.hibernate.use_sql_comments=true
14 spring.jpa.properties.hibernate.format_sql=true
15 spring.jpa.properties.hibernate.type=trace
```

# BACKEND



# BANCO DE DADOS - BACKEND

Login

Saved Settings:

Generic H2 (Embedded) ▾

Setting Name:

Generic H2 (Embedded)

Save

Remove

Driver Class:

org.h2.Driver

JDBC URL:

jdbc:h2:file:./data/exemplo

User Name:

sa


Password:

\*\*\*\*\*


Connect

Test Connection

# FRONTEND

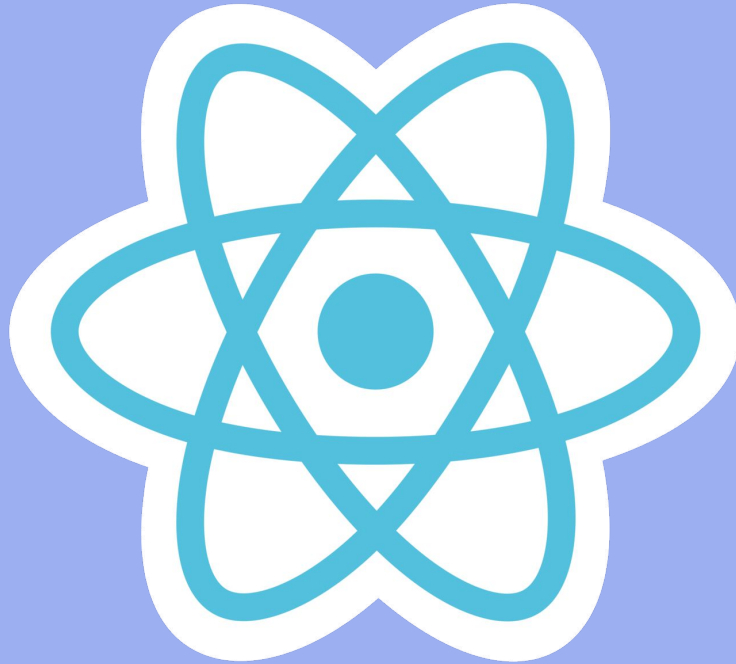

# ESTRUTURA - FRONTEND

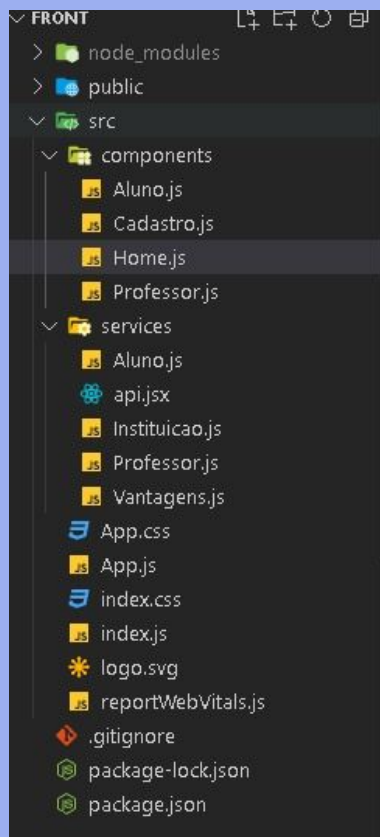



# FRONTEND



# FIM !

