

Intensificación Colaborativa

Nombre: Julia

Apellidos: Sánchez Márquez

UVUS: julsanmar2


Enlace al repositorio de GitHub:

<https://github.com/julsanmar2/EGC-2425>

Ejercicio Git

Apartado 1

```
practica@pc-13-189:~$ git clone git@github.com:julsanmar2/EGC-2425.git
Clonando en 'EGC-2425'...
The authenticity of host 'github.com (140.82.121.3)' can't be established.
ED25519 key fingerprint is SHA256:+DiY3wvvV6TuJJhbpZisF/zLDA0zPMSvHdkr4UvCOqU.
This key is not known by any other names
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'github.com' (ED25519) to the list of known hosts.
remote: Enumerating objects: 382, done.
remote: Counting objects: 100% (382/382), done.
remote: Compressing objects: 100% (243/243), done.
remote: Total 382 (delta 84), reused 382 (delta 84), pack-r
Recibiendo objetos: 100% (382/382), 1.60 MiB | 1.99 MiB/s,
Resolviendo deltas: 100% (84/84), listo.
practica@pc-13-189:~$ code EGC-2425/
practica@pc-13-189:~$
```

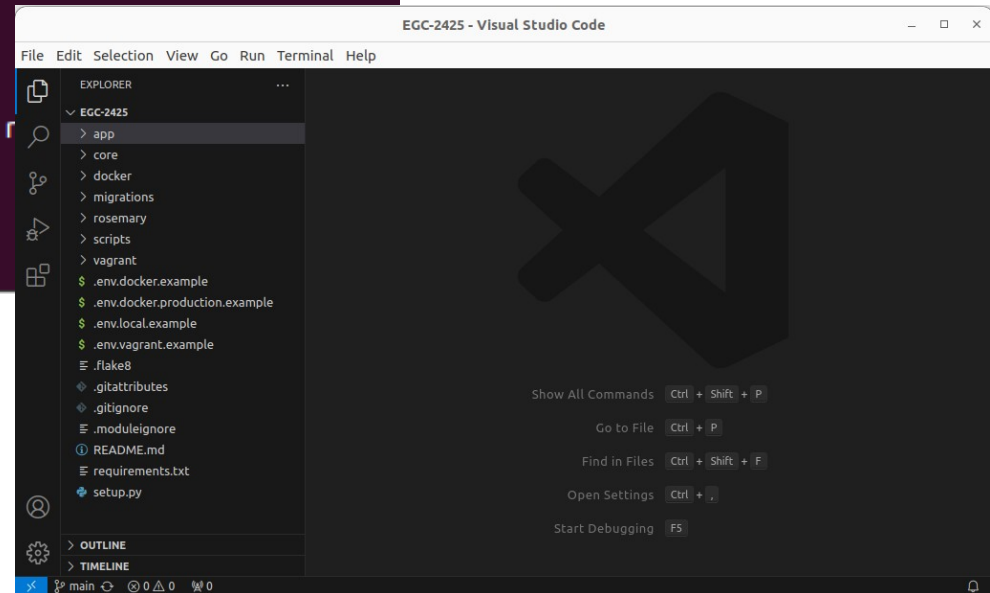

Ejercicio Git

Apartado 2

Actividades 10 de ene 16:21

Archivo Editar Ver Historial Marcadores Herramientas Ayuda

Apuntes Ejerc SSH and G rubpergar/ vDavidd/E Home - EGC Intensifica julsanmar2 Manual ins 1.instrucc UVLHUB X + v

127.0.0.1:5000

Parece que no ha iniciado Firefox desde hace tiempo. ¿Quiere limpiarlo para comenzar una experiencia renovada? ¡A propósito, bienvenido de nuevo! Reiniciar Firefox...

uvlhub.io

Search datasets... Login Sign up

Latest datasets

Sample dataset 4

January 10, 2025 at 03:21 PM

Description for dataset 4

Author 4 (Affiliation 4) (0000-0000-0000-0003)

<http://localhost:5000/doi/10.1234/dataset4>

tag1 tag2

View dataset Download (1.21 KB)

Sample dataset 3

January 10, 2025 at 03:21 PM

Description for dataset 3

Hub statistics


- 4 datasets
- 12 feature models
- 0 datasets viewed
- 0 feature models viewed
- 0 datasets downloaded
- 0 feature models downloaded

Related publication

David Romero-Oraanvidez José A.

Ejercicio Git

Apartado 3

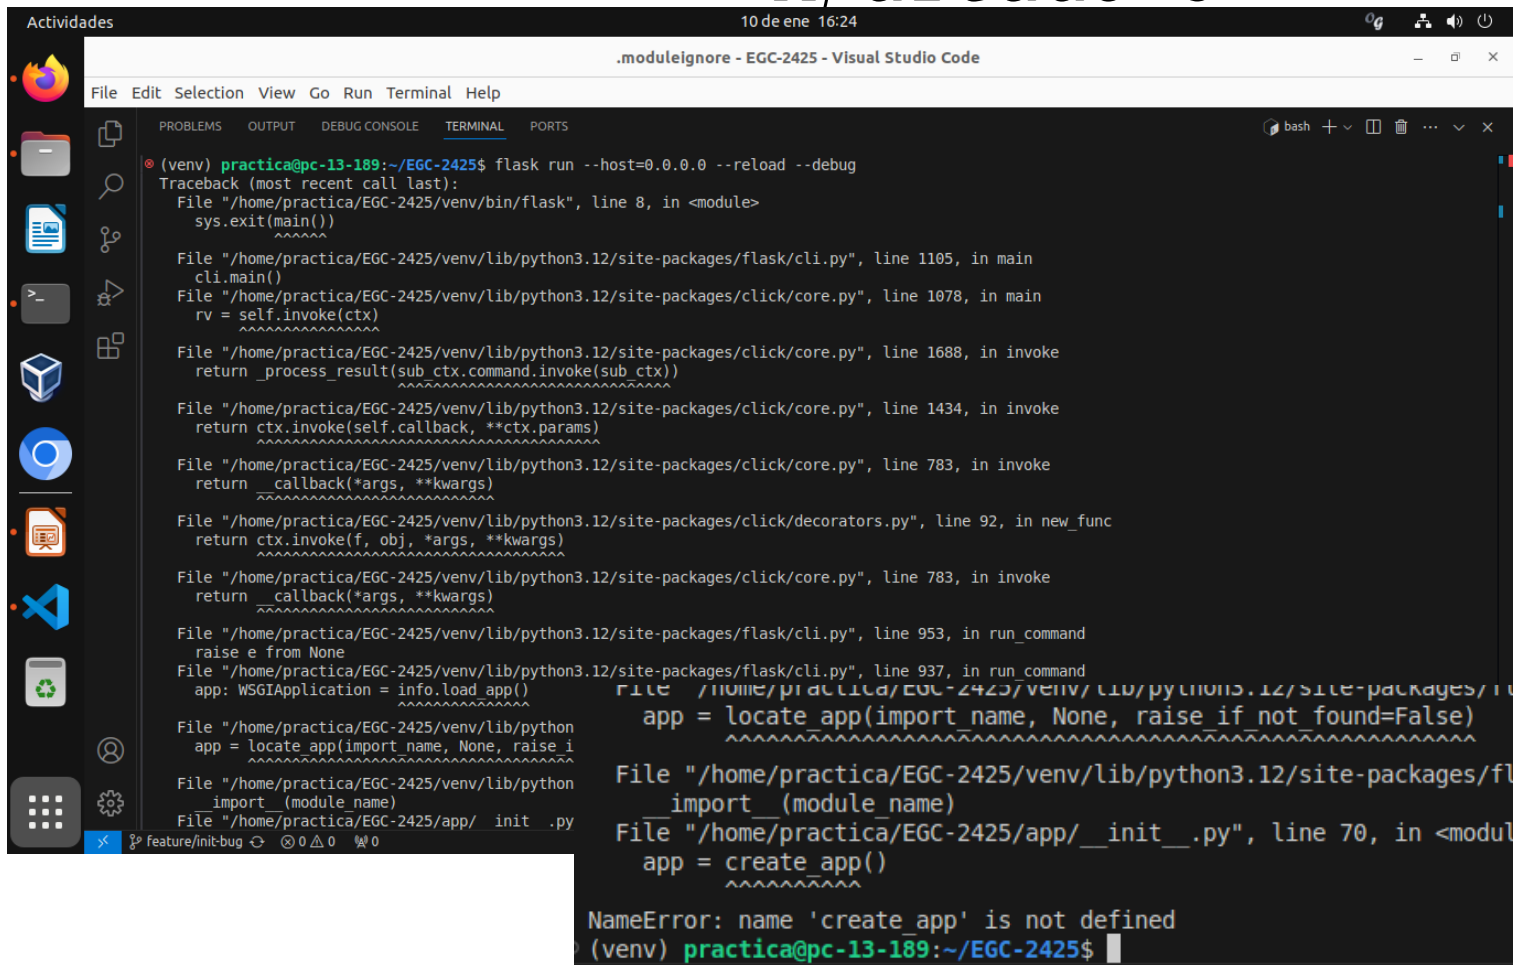

The screenshot shows a terminal window in Visual Studio Code with the title bar ".moduleignore - EGC-2425 - Visual Studio Code". The terminal output shows a command to run a Flask application with debug mode, followed by a detailed traceback. The error is a `NameError: name 'create_app' is not defined` in the `__init__.py` file. The traceback includes the following files and line numbers:

- `File "/home/practica/EGC-2425/venv/bin/flask", line 8, in <module>`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 1105, in main`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1078, in main`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1688, in invoke`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1434, in invoke`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 783, in invoke`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/decorators.py", line 92, in new_func`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 783, in invoke`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 953, in run_command`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 937, in run_command`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 339, in load_app`
- `File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 245, in locate_app`
- `File "/home/practica/EGC-2425/app/__init__.py", line 70, in <module>`

```
(venv) practica@pc-13-189:~/EGC-2425$ flask run --host=0.0.0.0 --reload --debug
Traceback (most recent call last):
  File "/home/practica/EGC-2425/venv/bin/flask", line 8, in <module>
    sys.exit(main())
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 1105, in main
    cli.main()
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1078, in main
    rv = self.invoke(ctx)
    ~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1688, in invoke
    return _process_result(sub_ctx.command.invoke(sub_ctx))
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 1434, in invoke
    return ctx.invoke(self.callback, **ctx.params)
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 783, in invoke
    return _callback(*args, **kwargs)
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/decorators.py", line 92, in new_func
    return ctx.invoke(f, obj, *args, **kwargs)
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/click/core.py", line 783, in invoke
    return _callback(*args, **kwargs)
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 953, in run_command
    raise e from None
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 937, in run_command
    app: WSGIApplication = info.load_app()
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 339, in load_app
    app = locate_app(import_name, None, raise_if_not_found=False)
    ~~~~~^
  File "/home/practica/EGC-2425/venv/lib/python3.12/site-packages/flask/cli.py", line 245, in locate_app
    _import_(module_name)
  File "/home/practica/EGC-2425/app/__init__.py", line 70, in <module>
    app = create_app()
    ~~~~~^
NameError: name 'create_app' is not defined
(venv) practica@pc-13-189:~/EGC-2425$
```

Ejercicio Git

Apartado 4

Ejercicio Git

Apartado 5

Commit 97585cb

[Preview](#)

[Give feedback](#)

[Browse files](#)

 **julsanmar2** committed 3 minutes ago

fix: fix app-init

 [fix/app-init](#)

1 parent [02d2aef](#) commit 97585cb 

 Filter files...



▼  app

 [__init__.py](#)

 **1 file changed** +0 -2 lines changed

 Search within code



▼ [app/__init__.py](#)  

-2    ...

```

+-----
@@ -19,7 +19,6 @@
19 19 db = SQLAlchemy()
20 20 migrate = Migrate()
21 21
22 - '''
23 22 def create_app(config_name='development'):
24 23     app = Flask(__name__)
25 24
+-----
+-----
@@ -65,6 +64,5 @@ def inject_vars_into_jinja():
65 64 }
```

Ejercicio Git

Apartado 6

Ejercicio Git

Apartado 7.1

- fix: fix app-init... [origin/fix/app-init](#)
- Introduce bug in app/init for debu...
- Initial version ready for local depl...
- Initialise base project Belen Ramos

```
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'fix/app-init' on GitHub by visiting:
remote:   https://github.com/julsanmar2/EGC-2425/pull/new/fix/app-init
remote:
To github.com:julsanmar2/EGC-2425.git
 * [new branch]      fix/app-init -> fix/app-init
rama 'fix/app-init' configurada para rastrear 'origin/fix/app-init'.
• (venv) practica@pc-13-189:~/EGC-2425$ git checkout -b feature/conflicto
Cambiado a nueva rama 'feature/conflicto'
```


Ejercicio Git

Apartado 7.2

__init__.py (Working Tree) (__init__.py) - EGC-2425 - Visual Studio Code

File Edit Selection View Go Run Terminal Help

SOURCE CONTROL

Message (Ctrl+Enter to commit ...)

Publish Branch

SOURCE C... Auto

- feat: add con... @feature/conflicto
- fix: fix app-ini... origin/fix/app-init
- Introduce bug in app/init for debu...
- Initial version ready for local depl...
- Initialise base project: Belen Ramos

```
app > __init__.py
22 def create_app(config_name='development'):
23     ...
24     # Load configuration according to environm
25     config_manager = ConfigManager(app)
26     config_manager.load_config(config_name=config
27
28     # Initialize SQLAlchemy and Migrate with t
29     db.init_app(app, uri=os.getenv('DB_CONNECT
30     migrate.init_app(app, db)
31
32     # Register modules
33     module_manager = ModuleManager(app)
34     module_manager.register_modules()
35
36     # Register login manager
37     from flask_login import LoginManager
38
```


```
22 def create_app(config_name='development'):
23     ...
24     # Load configuration according to environment
25     config_manager = ConfigManager(app)
26     config_manager.load_config(config_name=config
27
28     # Initialize SQLAlchemy and Migrate with the a
29     db.init_app(app, uri=os.getenv('DB_CONNECTION_
30     migrate.init_app(app, db)
31
32     # Register modules
33     module_manager = ModuleManager(app)
34     module_manager.register_modules()
35
36     # Register login manager
37     from flask_login import LoginManager
38
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'fix/app-init' on GitHub by visiting:
remote:   https://github.com/julsanmar2/EGC-2425/pull/new/fix/app-init
remote:
To github.com:julsanmar2/EGC-2425.git
 * [new branch]      fix/app-init -> fix/app-init
rama 'fix/app-init' configurada para rastrear 'origin/fix/app-init'.
• (venv) practica@pc-13-189:~/EGC-2425$ git checkout -b feature/conflicto
Cambiado a nueva rama 'feature/conflicto'
• (venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: add conflict"
[feature/conflicto 0b0c260] feat: add conflict
1 file changed, 1 insertion(+), 1 deletion(-)
```

Ejercicio Git

Apartado 7.3

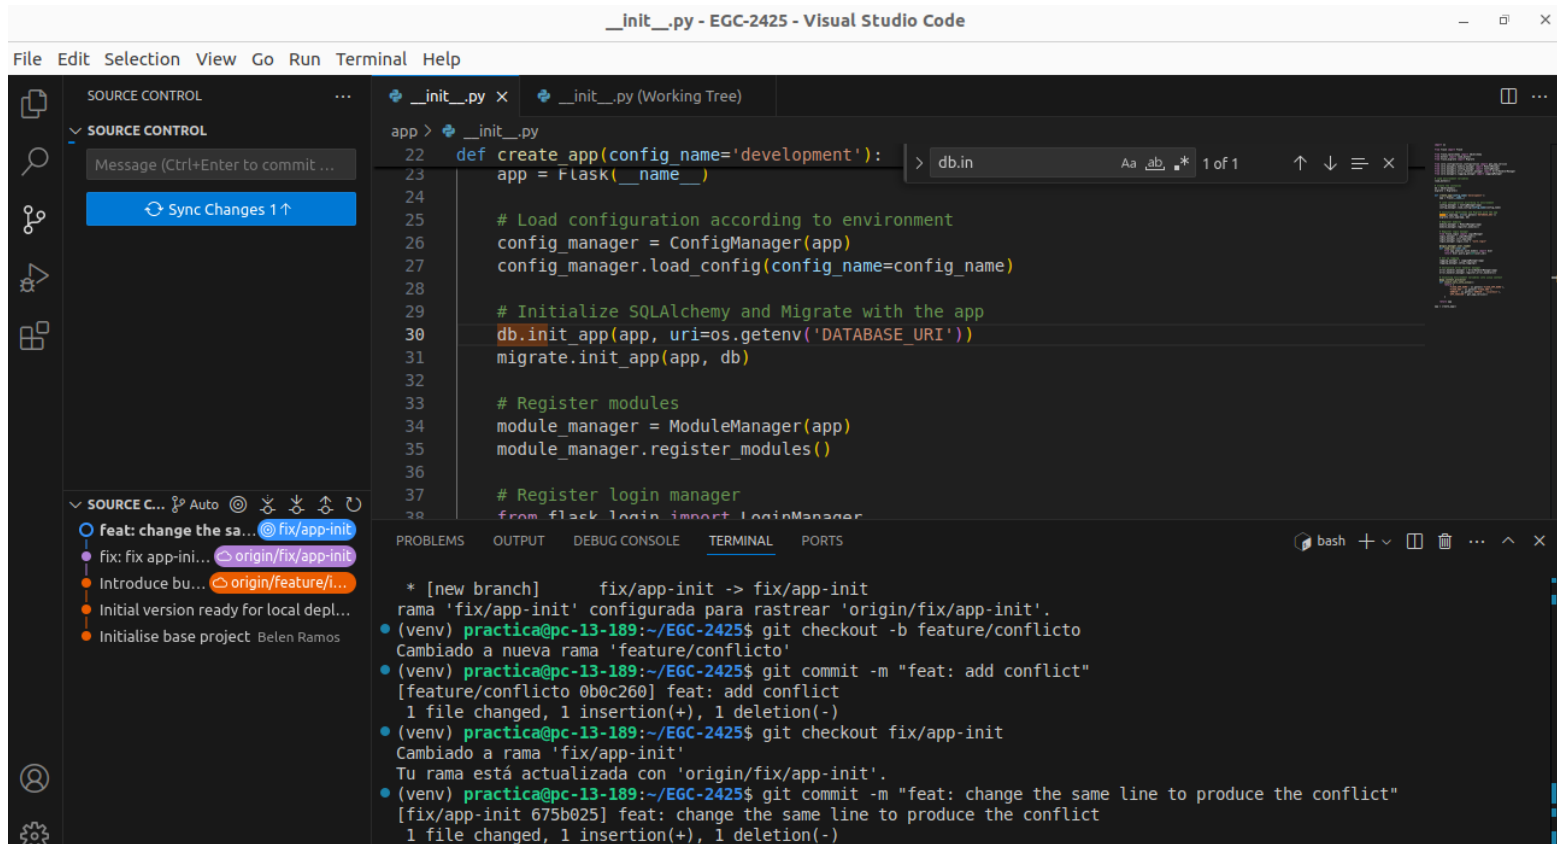

The screenshot shows the Visual Studio Code interface with the file `_init_.py` open in the editor. The file contains Python code for initializing a Flask application with SQLAlchemy and a login manager. The left sidebar shows the SOURCE CONTROL view with a list of commits. The bottom panel shows the TERMINAL view with a series of Git commands and their output.

```
def create_app(config_name='development'):  
    app = Flask(__name__)  
  
    # Load configuration according to environment  
    config_manager = ConfigManager(app)  
    config_manager.load_config(config_name=config_name)  
  
    # Initialize SQLAlchemy and Migrate with the app  
    db.init_app(app, uri=os.getenv('DATABASE_URI'))  
    migrate.init_app(app, db)  
  
    # Register modules  
    module_manager = ModuleManager(app)  
    module_manager.register_modules()  
  
    # Register login manager  
    from flask_login import LoginManager
```

```
* [new branch]      fix/app-init -> fix/app-init  
rama 'fix/app-init' configurada para rastrear 'origin/fix/app-init'.  
• (venv) practica@pc-13-189:~/EGC-2425$ git checkout -b feature/conflicto  
Cambiado a nueva rama 'feature/conflicto'  
• (venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: add conflict"  
[feature/conflicto 0b0c260] feat: add conflict  
1 file changed, 1 insertion(+), 1 deletion(-)  
• (venv) practica@pc-13-189:~/EGC-2425$ git checkout fix/app-init  
Cambiado a rama 'fix/app-init'  
Tu rama está actualizada con 'origin/fix/app-init'.  
• (venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: change the same line to produce the conflict"  
[fix/app-init 675b025] feat: change the same line to produce the conflict  
1 file changed, 1 insertion(+), 1 deletion(-)
```

Ejercicio Git

Apartado 7.4

The screenshot shows the Visual Studio Code interface with a merge conflict in the file `__init__.py`. The conflict is between the `HEAD` (Current Change) and the `feature/conflicto` branch (Incoming Change). The conflicting lines are highlighted in green and blue. A blue button labeled "Resolve in Merge Editor" is visible next to the conflict. The left sidebar shows the SOURCE CONTROL view with a list of branches and a commit button. The bottom panel shows the TERMINAL view with the following output:

```
(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: add conflict"
[feature/conflicto 0b0c260] feat: add conflict
1 file changed, 1 insertion(+), 1 deletion(-)

(venv) practica@pc-13-189:~/EGC-2425$ git checkout fix/app-init
Cambiado a rama 'fix/app-init'
Tu rama está actualizada con 'origin/fix/app-init'.

(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: change the same line to produce the conflict"
[fix/app-init 675b025] feat: change the same line to produce the conflict
1 file changed, 1 insertion(+), 1 deletion(-)

(venv) practica@pc-13-189:~/EGC-2425$ git merge feature/conflicto
Auto-fusionando app/_init_.py
CONFLICTO (contenido): Conflicto de fusión en app/_init_.py
Fusión automática falló; arregle los conflictos y luego realice un commit con el resultado.
```

Ejercicio Git

Apartado 7.5

The screenshot shows the Visual Studio Code interface with a file named `__init__.py` open. The editor displays Python code for initializing a Flask application. A conflict is highlighted on line 30, where the code `db.init_app(app, uri=os.getenv('DATABASE URI'))` is present in both the working tree and the branch being merged. A blue button labeled "Resolve in Merge Editor" is visible on the right side of the editor.

The left sidebar shows the "SOURCE CONTROL" view with a list of changes. The bottom panel shows the "TERMINAL" view with the following commands and output:

```
(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: add conflict"
[feature/conflicto 0b0c260] feat: add conflict
1 file changed, 1 insertion(+), 1 deletion(-)

(venv) practica@pc-13-189:~/EGC-2425$ git checkout fix/app-init
Cambiado a rama 'fix/app-init'
Tu rama está actualizada con 'origin/fix/app-init'.

(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: change the same line to produce the conflict"
[fix/app-init 675b025] feat: change the same line to produce the conflict
1 file changed, 1 insertion(+), 1 deletion(-)

(venv) practica@pc-13-189:~/EGC-2425$ git merge feature/conflicto
Auto-fusionando app/_init_.py
CONFLICTO (contenido): Conflicto de fusión en app/_init_.py
Fusión automática falló; arregle los conflictos y luego realice un commit con el resultado.

(venv) practica@pc-13-189:~/EGC-2425$
```

Ejercicio Git

Apartado 7.6


```
(venv) practica@pc-13-189:~/EGC-2425$ git merge feature/conflicto
Auto-fusionando app/__init__.py
CONFLICTO (contenido): Conflicto de fusión en app/__init__.py
Fusión automática falló; arregle los conflictos y luego realice un commit con el resultado.
• (venv) practica@pc-13-189:~/EGC-2425$ git commit -m "fix: fix conflict"
[fix/app-init e52b30c] fix: fix conflict
○ (venv) practica@pc-13-189:~/EGC-2425$
```

fix/app-init 0: 31 0 0 0

Ln 30, Col 1 (51 selected) Spaces: 4 UTF-8 LF Python

Ejercicio Git

Apartado 7.7

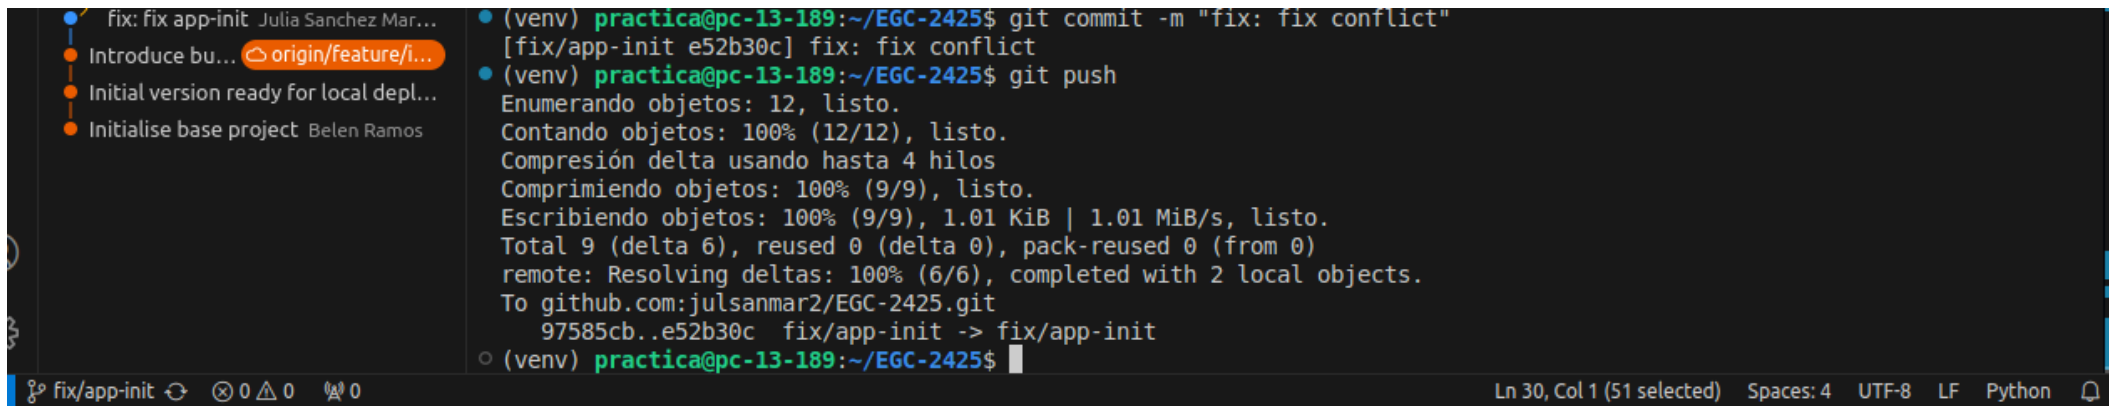

The screenshot shows a code editor interface. On the left, a commit history sidebar displays four commits: 'fix: fix app-init' by Julia Sanchez Mar..., 'Introduce bu...' by origin/feature/i..., 'Initial version ready for local depl...', and 'Initialise base project' by Belen Ramos. The main area on the right is a terminal window with a dark background. It shows the execution of 'git commit -m "fix: fix conflict"' and 'git push'. The push output indicates 12 objects enumerated, 100% compression, and successful upload to the remote repository. The status bar at the bottom indicates 'Ln 30, Col 1 (51 selected)' and lists settings: 'Spaces: 4', 'UTF-8', 'LF', and 'Python'.

```
(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "fix: fix conflict"
[fix/app-init e52b30c] fix: fix conflict
(venv) practica@pc-13-189:~/EGC-2425$ git push
Enumerando objetos: 12, listo.
Contando objetos: 100% (12/12), listo.
Compresión delta usando hasta 4 hilos
Comprimiendo objetos: 100% (9/9), listo.
Escribiendo objetos: 100% (9/9), 1.01 KiB | 1.01 MiB/s, listo.
Total 9 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 2 local objects.
To github.com:julsanmar2/EGC-2425.git
 97585cb..e52b30c  fix/app-init -> fix/app-init
(venv) practica@pc-13-189:~/EGC-2425$
```

fix/app-init 0 0 0

Ln 30, Col 1 (51 selected) Spaces: 4 UTF-8 LF Python

Ejercicio GitHub Actions

Apartado 1

10 de ene 17:01

ejercicio_ci.yml - EGC-2425 - Visual Studio Code

Edit Selection View Go Run Terminal Help

EXPLORER

- EGC-2425
 - .github/workflows
 - ! ejercicio_ci.yml
 - > app
 - > core
 - > docker
 - > migrations
 - > rosemary
 - > rosemary.egg-info
 - > scripts
 - > uploads
 - > vagrant
 - > venv
 - .env
 - .env.docker.example
 - .env.docker.production.example
 - .env.local.example
 - .env.vagrant.example
 - .flake8
 - .gitattributes
 - .gitignore
 - .moduleignore
 - app.log
 - README.md
 - requirements.txt
 - setup.py
 - > OUTLINE
 - > TIMELINE

.github > workflows > ! ejercicio_ci.yml

```
7 jobs:
8   pytest:
11     services:
12       mysql:
13
22
23   steps:
24     - uses: actions/checkout@v4
25
26     - uses: actions/setup-python@v5
27       with:
28         python-version: '3.11'
29
30     - name: Prepare environment
31       run: |
32         sed -i '/rosemary @ file:V\\V/app/d' requirements.txt
33
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(venv) practica@pc-13-189:~/EGC-2425\$ git push
Enumerando objetos: 12, listo.
Contando objetos: 100% (12/12), listo.
Compresión delta usando hasta 4 hilos
Comprimiendo objetos: 100% (9/9), listo.
Escribiendo objetos: 100% (9/9), 1.01 KiB | 1.01 MiB/s, listo.
Total 9 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 2 local objects.
To github.com:julsanmar2/EGC-2425.git
97585cb..e52b30c fix/app-init -> fix/app-init


(venv) practica@pc-13-189:~/EGC-2425\$ git checkout config/ci
rama 'config/ci' configurada para rastrear 'origin/config/ci'.
Cambiado a nueva rama 'config/ci'

(venv) practica@pc-13-189:~/EGC-2425\$

Ln 28, Col 1 (30 selected) Spaces: 2 UTF-8 LF YAML

Ejercicio GitHub Actions

Apartado 2

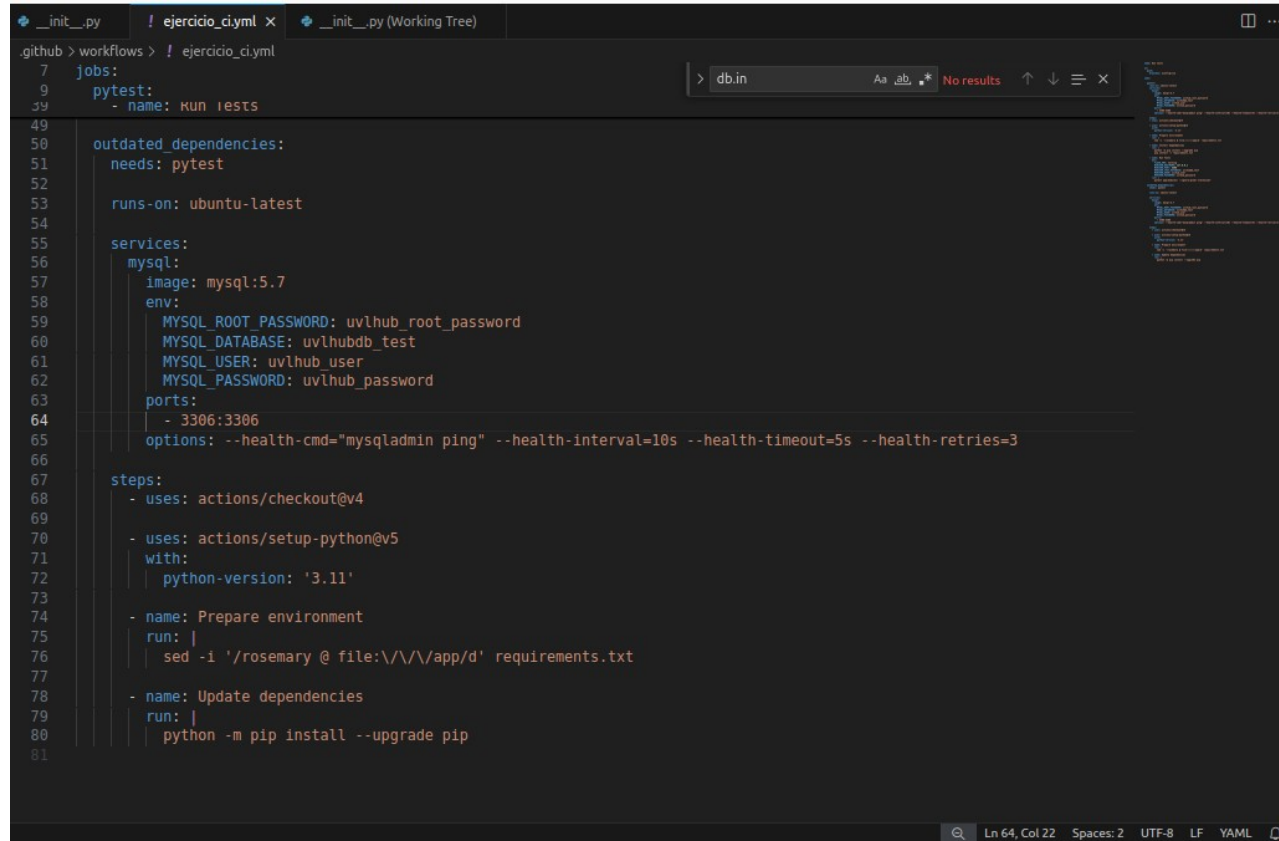


The screenshot shows a code editor with a dark theme. The top bar indicates the file is 'ejercicio_ci.yml' and it's part of a 'Working Tree'. The editor displays a GitHub Actions workflow file. The workflow is triggered on push to the 'main' branch. It contains a job named 'pytest' that runs on 'ubuntu-latest'. The job includes a service for MySQL 5.7 with specific environment variables and ports. The steps include checking out the code, setting up Python 3.11, preparing the environment by updating requirements.txt, and updating dependencies using pip.

```
7 jobs:
9   pytest:
10     - name: Run tests
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49   outdated_dependencies:
50     needs: pytest
51
52
53     runs-on: ubuntu-latest
54
55     services:
56       mysql:
57         image: mysql:5.7
58         env:
59           MYSQL_ROOT_PASSWORD: uvlhub_root_password
60           MYSQL_DATABASE: uvlhubdb_test
61           MYSQL_USER: uvlhub_user
62           MYSQL_PASSWORD: uvlhub_password
63         ports:
64           - 3306:3306
65         options: --health-cmd="mysqladmin ping" --health-interval=10s --health-timeout=5s --health-retries=3
66
67     steps:
68       - uses: actions/checkout@v4
69
70       - uses: actions/setup-python@v5
71         with:
72           python-version: '3.11'
73
74       - name: Prepare environment
75         run: |
76           sed -i '/rosemary @ file:\\/\\/app/d' requirements.txt
77
78       - name: Update dependencies
79         run: |
80           python -m pip install --upgrade pip
81
```


Ejercicio GitHub Actions

Apartado 2

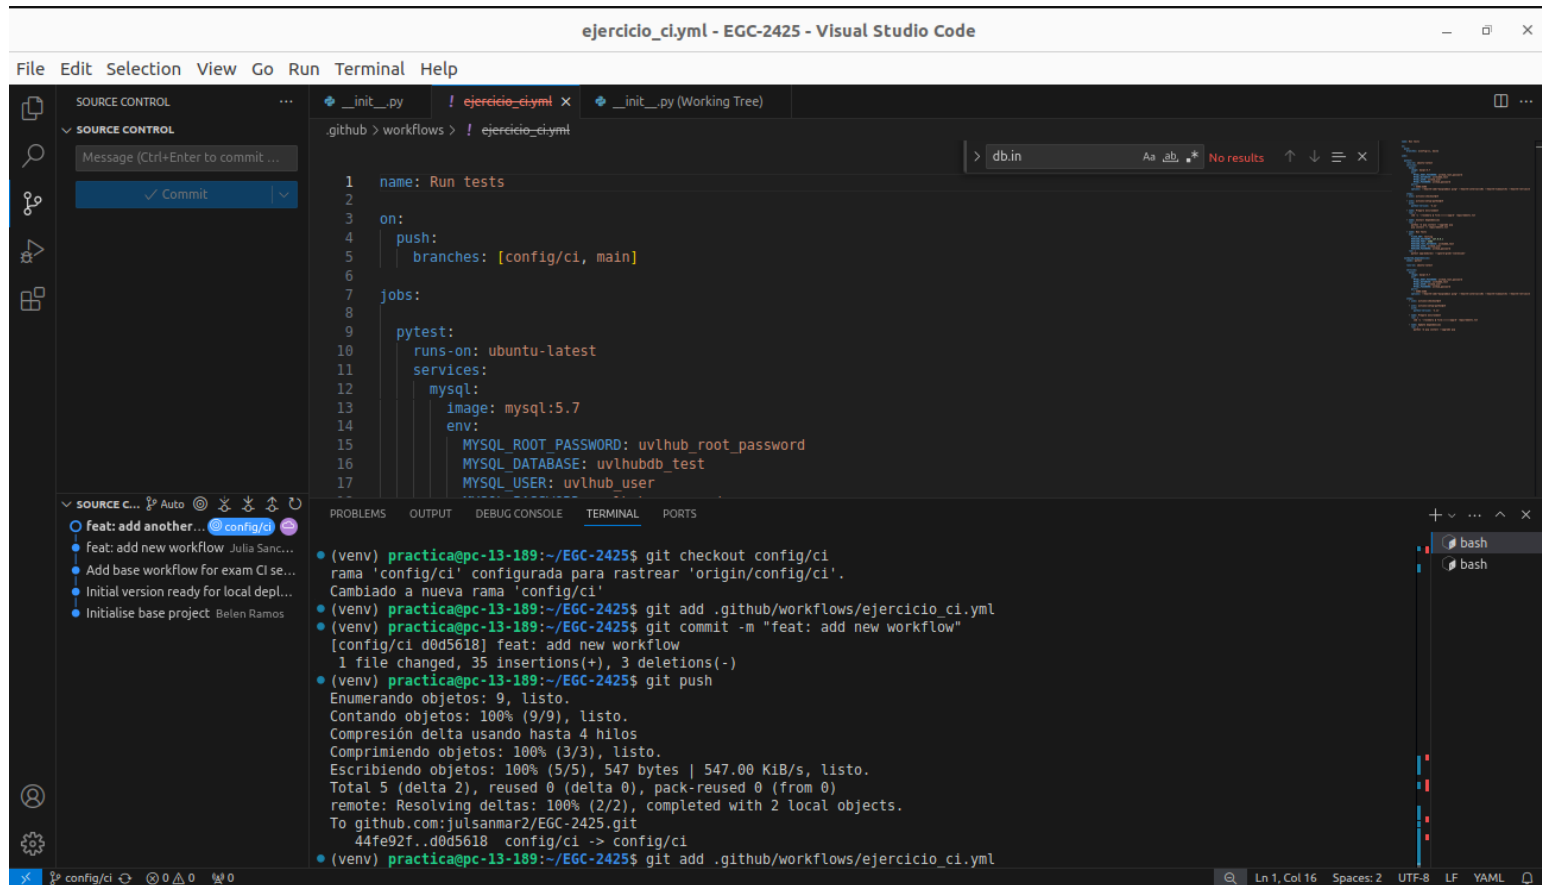

The screenshot shows the Visual Studio Code interface with the file `ejercicio_ci.yml` open. The workflow is configured to run tests on the `config/ci` branch. The terminal shows the execution of the workflow, including the checkout of the branch, the addition of the workflow file, and the push to the repository.

```
ejercicio_ci.yml - EGC-2425 - Visual Studio Code
```

File Edit Selection View Go Run Terminal Help

SOURCE CONTROL

Message (Ctrl+Enter to commit ...)

Commit

Source Control

Feat: add another... config/ci

Feat: add new workflow Julia Sanc...

Add base workflow for exam CI se...

Initial version ready for local depl...

Initialise base project Belen Ramos

```
1 name: Run tests
2
3 on:
4   push:
5     branches: [config/ci, main]
6
7 jobs:
8
9   pytest:
10    runs-on: ubuntu-latest
11    services:
12      mysql:
13        image: mysql:5.7
14        env:
15          MYSQL_ROOT_PASSWORD: uvlhub_root_password
16          MYSQL_DATABASE: uvlhubdb_test
17          MYSQL_USER: uvlhub_user
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS


```
(venv) practica@pc-13-189:~/EGC-2425$ git checkout config/ci
rama 'config/ci' configurada para rastrear 'origin/config/ci'.
Cambiado a nueva rama 'config/ci'
(venv) practica@pc-13-189:~/EGC-2425$ git add .github/workflows/ejercicio_ci.yml
(venv) practica@pc-13-189:~/EGC-2425$ git commit -m "feat: add new workflow"
[config/ci d0d5618] feat: add new workflow
1 file changed, 35 insertions(+), 3 deletions(-)
(venv) practica@pc-13-189:~/EGC-2425$ git push
Enumerando objetos: 9, listo.
Contando objetos: 100% (9/9), listo.
Compresión delta usando hasta 4 hilos
Comprimiendo objetos: 100% (3/3), listo.
Escribiendo objetos: 100% (5/5), 547 bytes | 547.00 KiB/s, listo.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To github.com:julsanmar2/EGC-2425.git
44fe92f..d0d5618 config/ci -> config/ci
(venv) practica@pc-13-189:~/EGC-2425$ git add .github/workflows/ejercicio_ci.yml
```

Ln 1, Col 16 Spaces: 2 UTF-8 LF YAML

Ejercicio GitHub Actions

Apartado 3

Se supone que yendo a la pestaña de Actions te deben salir los workflows pero me aparece esto

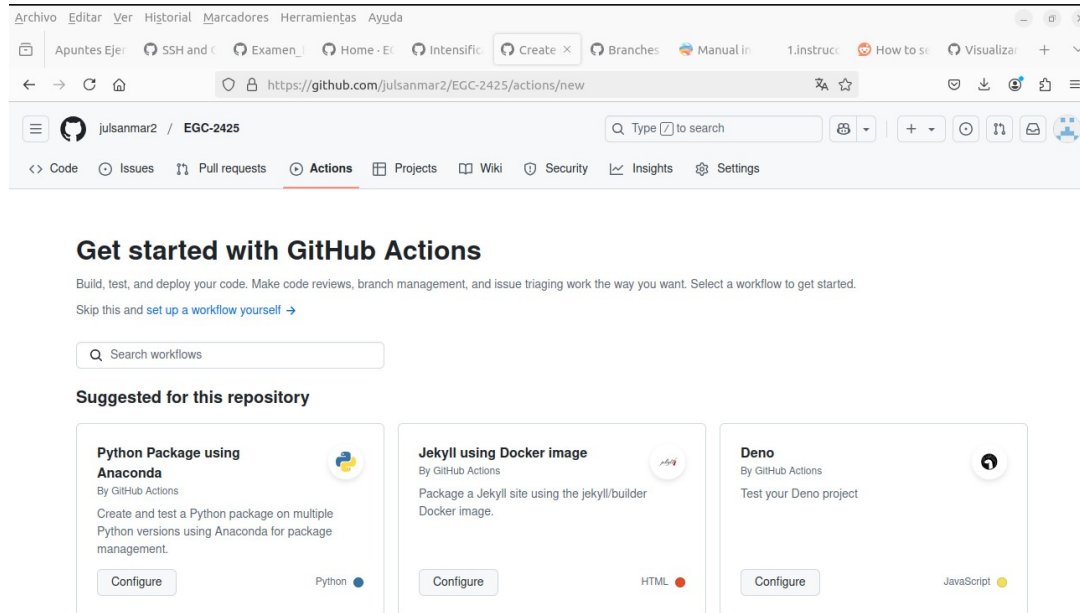


Ejercicio Pruebas

Apartado 1

```
• (venv) practica@pc-13-189:~/EGC-2425$ git checkout test/exam
rama 'test/exam' configurada para rastrear 'origin/test/exam'.
Cambiado a nueva rama 'test/exam'
```

Ejercicio Pruebas

Apartado 2

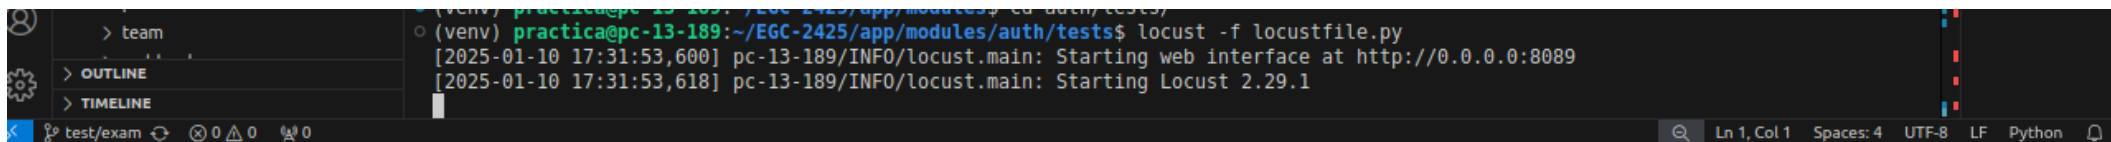

The screenshot shows a terminal window with a dark background. The prompt is `(venv) practica@pc-13-189:~/EGC-2425/app/modules/auth/tests$`. The command `locust -f locustfile.py` has been executed. The output shows two lines of log messages: `[2025-01-10 17:31:53,600] pc-13-189/INFO/locust.main: Starting web interface at http://0.0.0.0:8089` and `[2025-01-10 17:31:53,618] pc-13-189/INFO/locust.main: Starting Locust 2.29.1`. On the left side of the terminal, there is a sidebar with a gear icon and a list containing `> team`, `> OUTLINE`, and `> TIMELINE`. At the bottom of the terminal, there is a status bar showing `test/exam`, a search icon, and some statistics: `0 0 0`. On the right side of the status bar, it shows `Ln 1, Col 1`, `Spaces: 4`, `UTF-8`, `LF`, and `Python`.

```
(venv) practica@pc-13-189:~/EGC-2425/app/modules/auth/tests$ locust -f locustfile.py
[2025-01-10 17:31:53,600] pc-13-189/INFO/locust.main: Starting web interface at http://0.0.0.0:8089
[2025-01-10 17:31:53,618] pc-13-189/INFO/locust.main: Starting Locust 2.29.1
```

Para ejecutar las
pruebas de carga
debemos estar en
el directorio que
contiene la
prueba de
carga .py

Ejercicio Pruebas

Apartado 3

Ejercicio Pruebas

Apartado 4

Ejercicio Pruebas

Apartado 5

```
• (venv) practica@pc-13-189:~/EGC-2425$ pytest app/modules/ --ignore-glob='*selenium*'
```

```
===== test session starts =====
```

```
platform linux -- Python 3.12.8, pytest-8.2.2, pluggy-1.5.0
```

```
rootdir: /home/practica/EGC-2425/app/modules
```

```
configfile: pytest.ini
```

```
plugins: Faker-26.0.0, cov-5.0.0
```

```
collected 14 items
```

```
app/modules/auth/tests/test_unit.py .....
```

```
[ 64%]
```

```
app/modules/featuremodel/tests/test_unit.py .
```

```
[ 71%]
```

```
app/modules/flamapy/tests/test_unit.py .
```

```
[ 78%]
```

```
app/modules/hubfile/tests/test_unit.py .
```

```
[ 85%]
```

```
app/modules/profile/tests/test_unit.py .
```

```
[ 92%]
```

```
app/modules/webhook/tests/test_unit.py .
```

```
[100%]
```

```
===== 14 passed in 9.07s =====
```

```
• (venv) practica@pc-13-189:~/EGC-2425$
```

Ejercicio Docker

Apartado 1

test_unit.py - EGC-2425 - Visual Studio Code

File Edit Selection View Go Run Terminal Help

EXPLORER

- EGC-2425
 - .pytest_cache
 - app
 - __pycache__
 - modules
 - __pycache__
 - .pytest_cache
 - auth
 - __pycache__
 - assets
 - templates
 - tests
 - __pycache__
 - test_selenium_jde
 - __init__.py
 - locustfile.py
 - test_selenium.py
 - test_unit.py
 - __init__.py
 - forms.py
 - models.py
 - repositories.py
 - routes.py
 - seeders.py
 - services.py
 - dataset
 - explore
 - featuremodel
 - flamapy
 - hubfile
 - profile
 - public
 - OUTLINE
 - TIMELINE

test_unit.py

```
92 def test_service_create_with_profile_fail_no_email(clean_database):
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(venv) practica@pc-13-189:~/EGC-2425\$ docker compose -f docker/docker-compose.dev.yml up -d --build


```
[+] Building 0.0s (0/1)
[+] Running 0/1
[+] Building 0.5s (6/7)
[+] Building 1.1s (28/28) FINISHED
=> [db internal] load build definition from Dockerfile.mariadb
=> => transferring dockerfile: 165B
=> [db internal] load metadata for docker.io/library/mariadb:latest
=> [db internal] load .dockerignore
=> => transferring context: 2B
=> [db 1/2] FROM docker.io/library/mariadb:latest@sha256:a9547599cd87d7242435aea6fda22a9d83e2c06d16c658ef70d2868b3d3f6a80
=> CACHED [db 2/2] RUN apt-get update && apt-get install -y mariadb-client && rm -rf /var/lib/apt/lists/*
=> [db] exporting to image
=> => exporting layers
=> => writing image sha256:e501be5b6d4f7473caf51544b1a051988814a1265c5443dab6efe18b4c1ae8bc
=> => naming to docker.io/library/docker-db
=> [db] resolving provenance for metadata file
=> [web internal] load build definition from Dockerfile.dev
=> => transferring dockerfile: 2.15kB
=> [web internal] load metadata for docker.io/library/python:3.12-slim
=> [web internal] load .dockerignore
=> => transferring context: 2B
=> [web 1/15] FROM docker.io/library/python:3.12-slim@sha256:10f3aaab98db50cba827d3b33a91f39dc9ec2d02ca9b85cbc5008220d07b
=> [web internal] load build context
=> => transferring context: 5.33kB
=> CACHED [web 2/15] RUN apt-get update && apt-get install -y --no-install-recommends mariadb-client && apt-get i
=> CACHED [web 3/15] RUN apt-get install -y --no-install-recommends ca-certificates gnupg lsb-release && curl -fsSL h
=> CACHED [web 4/15] RUN apt-get clean && rm -rf /var/lib/apt/lists/*
=> CACHED [web 5/15] WORKDIR /app
=> CACHED [web 6/15] COPY requirements.txt .
=> CACHED [web 7/15] RUN find . -type d -name "__pycache__" -exec rm -r {} + && find . -type f -name "*.pyc" -exec rm
=> CACHED [web 8/15] COPY --chmod=0755 scripts/wait-for-db.sh ./scripts/
=> CACHED [web 9/15] COPY --chmod=0755 scripts/init-testing-db.sh ./scripts/
=> CACHED [web 10/15] COPY rosemary/ ./rosemary
=> CACHED [web 11/15] COPY setup.py ./
=> CACHED [web 12/15] COPY docker/ ./docker
```

bash

chore/docker* 0 0 0 0 0 0 Ln 127, Col 1 Spaces: 4 UTF-8 LF Python

Ejercicio Docker

Apartado 1

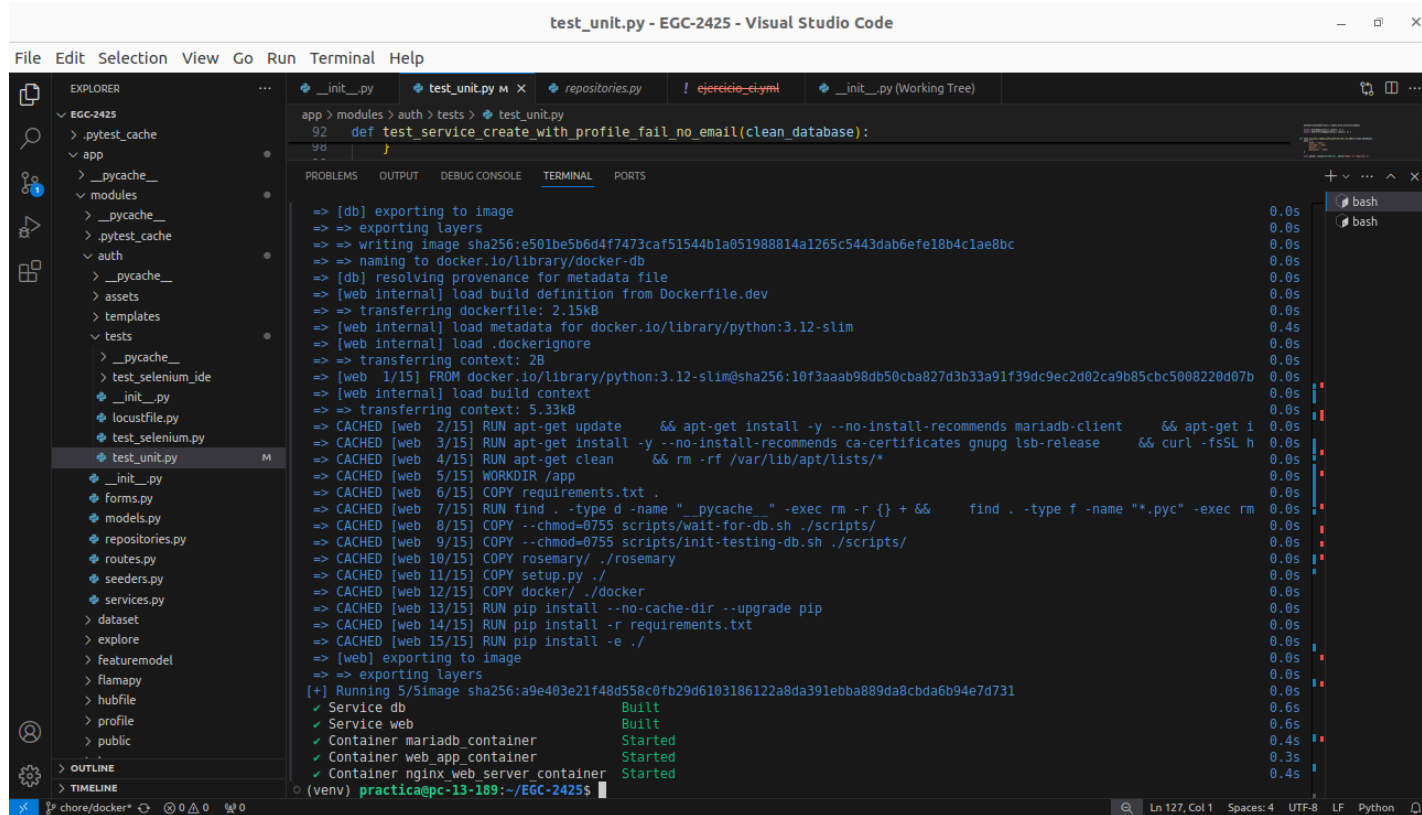

The screenshot shows the Visual Studio Code interface with the file explorer on the left, the editor in the center, and the terminal at the bottom. The file explorer shows a project structure for 'EGC-2425' with various files and folders. The editor displays a Python file named 'test_unit.py' with a function definition. The terminal shows the output of a Docker build command, including the export of layers, writing of image metadata, and the installation of dependencies using apt and pip. The build process is successful, resulting in a Docker image with a sha256 hash.

```
test_unit.py - EGC-2425 - Visual Studio Code

File Edit Selection View Go Run Terminal Help

EXPLORER
EGC-2425
  .pytest_cache
  app
    __pycache__
    modules
      __pycache__
      .pytest_cache
  auth
    __pycache__
    assets
    templates
    tests
      __pycache__
      test_selenium ide
      __init__.py
      locustfile.py
      test_selenium.py
      test_unit.py
      __init__.py
      forms.py
      models.py
      repositories.py
      routes.py
      seeders.py
      services.py
  dataset
  explore
  featuremodel
  flamapy
  hubfile
  profile
  public
  OUTLINE
  TIMELINE


test_unit.py
92 def test_service_create_with_profile_fail_no_email(clean_database):

TERMINAL
[db] exporting to image
=> exporting layers
=> writing image sha256:e501be5b6d4f7473caf51544b1a051988814a1265c5443dab6efe18b4c1ae8bc
=> naming to docker.io/library/docker-db
[db] resolving provenance for metadata file
[web internal] load build definition from Dockerfile.dev
=> transferring dockerfile: 2.15kB
[web internal] load metadata for docker.io/library/python:3.12-slim
=> transferring context: 2B
[web 1/15] FROM docker.io/library/python:3.12-slim@sha256:10f3aaab98db50c8a827d3b33a91f39dc9ec2d02ca9b85cbc5008220d07b
=> transferring context: 5.33kB
[web 2/15] RUN apt-get update && apt-get install -y --no-install-recommends mariadb-client && apt-get i
[web 3/15] RUN apt-get install -y --no-install-recommends ca-certificates gnupg lsb-release && curl -fsSL h
[web 4/15] RUN apt-get clean && rm -rf /var/lib/apt/lists/*
[web 5/15] WORKDIR /app
[web 6/15] COPY requirements.txt .
[web 7/15] RUN find . -type d -name "__pycache__" -exec rm -r {} + && find . -type f -name "*.pyc" -exec rm
[web 8/15] COPY --chmod=0755 scripts/wait-for-db.sh ./scripts/
[web 9/15] COPY --chmod=0755 scripts/init-testing-db.sh ./scripts/
[web 10/15] COPY rosemary/ ./rosemary
[web 11/15] COPY setup.py .
[web 12/15] COPY docker/ ./docker
[web 13/15] RUN pip install --no-cache-dir --upgrade pip
[web 14/15] RUN pip install -r requirements.txt
[web 15/15] RUN pip install -e .
[web] exporting to image
=> exporting layers
[+] Running 5/5Image sha256:a9e403e21f48d558c0fb29d6103186122a8da391ebba889da8cbda6b94e7d731
Service db Built
Service web Built
Container mariadb_container Started
Container web_app_container Started
Container nginx_web_server_container Started

(venv) practica@pc-13-189:~/EGC-2425
```

Ejercicio Vagrant

Apartado 1

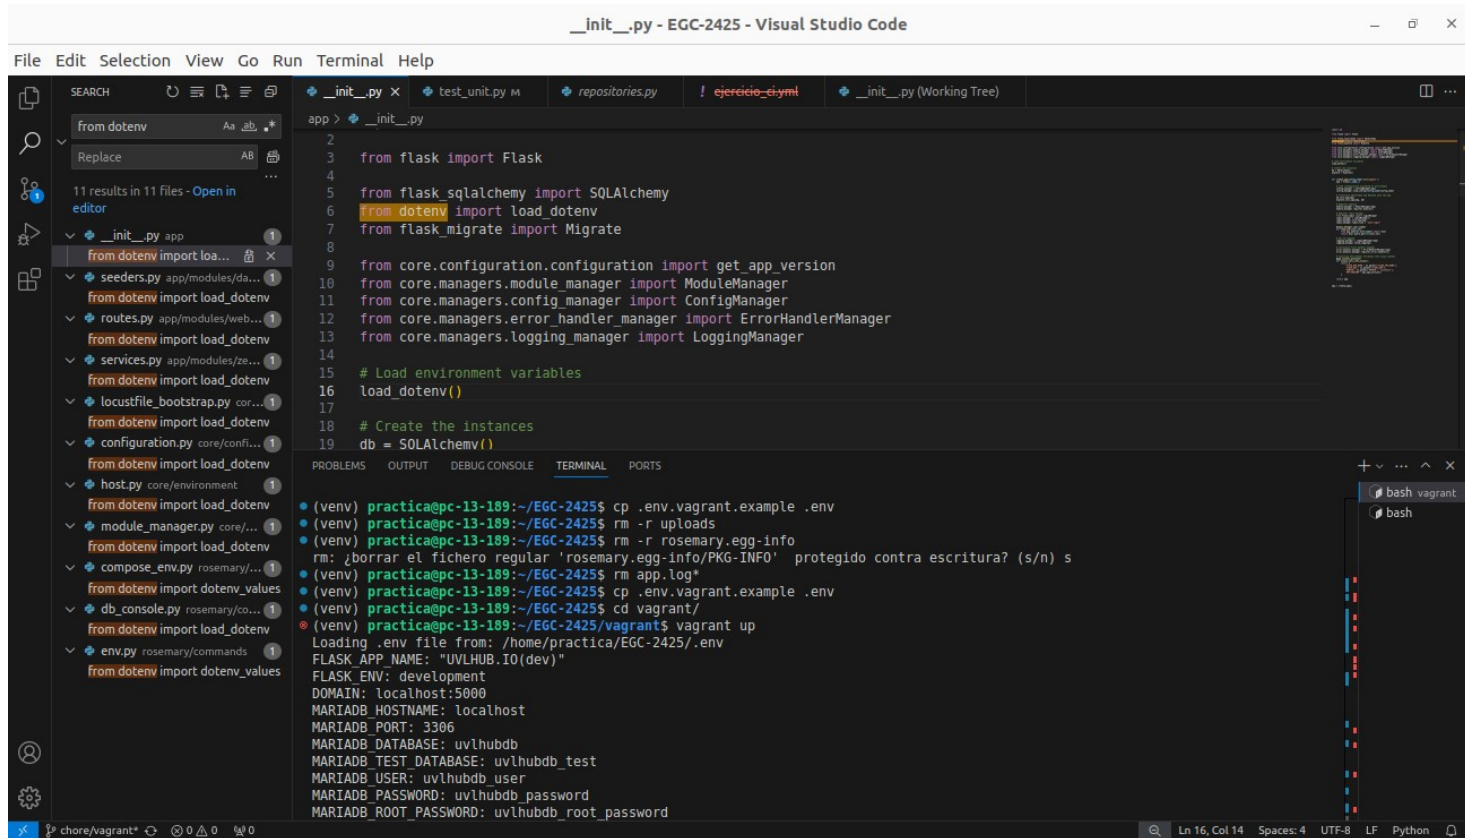

The screenshot shows the Visual Studio Code editor interface. The title bar indicates the file is `_init_.py` in the `EGC-2425` workspace. The menu bar includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The left sidebar shows a file explorer with a search bar and a list of files, including `_init_.py`, `seeder.py`, `routes.py`, `services.py`, `locustfile_bootstrap.py`, `configuration.py`, `host.py`, `module_manager.py`, `compose_env.py`, `db_console.py`, and `env.py`. The main editor area displays the content of `_init_.py`, which includes imports for Flask, SQLAlchemy, and Flask-Migrate, and logic for loading environment variables and creating database instances. The bottom panel shows the TERMINAL view with a list of commands and their output, including setting up the environment, removing old files, and running Vagrant.

```
__init__.py - EGC-2425 - Visual Studio Code
```

```
File Edit Selection View Go Run Terminal Help
```

```
SEARCH from dotenv Aa ab, *
```

```
Replace AB
```

```
11 results in 11 files - Open in editor
```

```
from dotenv import load_dotenv
```

```
seeder.py app/modules/data/...
```

```
routes.py app/modules/web/...
```

```
services.py app/modules/ze...
```

```
locustfile_bootstrap.py cor...
```

```
configuration.py core/confi...
```

```
host.py core/environment
```

```
module_manager.py core/...
```

```
compose_env.py rosemary/...
```

```
db_console.py rosemary/co...
```

```
env.py rosemary/commands
```

```
from dotenv import load_dotenv
```

```
from dotenv import dotenv_values
```

```
app > _init_.py
```

```
2
```

```
3 from flask import Flask
```

```
4
```

```
5 from flask_sqlalchemy import SQLAlchemy
```

```
6 from dotenv import load_dotenv
```

```
7 from flask_migrate import Migrate
```

```
8
```

```
9 from core.configuration.configuration import get_app_version
```

```
10 from core.managers.module_manager import ModuleManager
```

```
11 from core.managers.config_manager import ConfigManager
```

```
12 from core.managers.error_handler_manager import ErrorHandlerManager
```

```
13 from core.managers.logging_manager import LoggingManager
```

```
14
```

```
15 # Load environment variables
```

```
16 load_dotenv()
```

```
17
```

```
18 # Create the instances
```

```
19 db = SQLAlchemy()
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
```

```
(venv) practica@pc-13-189:~/EGC-2425$ cp .env.vagrant.example .env
```

```
(venv) practica@pc-13-189:~/EGC-2425$ rm -r uploads
```

```
(venv) practica@pc-13-189:~/EGC-2425$ rm -r rosemary.egg-info
```

```
rm: ¿borrar el fichero regular 'rosemary.egg-info/PKG-INFO' protegido contra escritura? (s/n) n
```

```
(venv) practica@pc-13-189:~/EGC-2425$ rm app.log
```

```
(venv) practica@pc-13-189:~/EGC-2425$ cp .env.vagrant.example .env
```

```
(venv) practica@pc-13-189:~/EGC-2425$ cd vagrant/
```

```
(venv) practica@pc-13-189:~/EGC-2425/vagrant$ vagrant up
```

```
Loading .env file from: /home/practica/EGC-2425/.env
```

```
FLASK_APP_NAME: "UVLHUB.IO(dev)"
```

```
FLASK_ENV: development
```

```
DOMAIN: localhost:5000
```

```
MARIADB_HOSTNAME: localhost
```

```
MARIADB_PORT: 3306
```

```
MARIADB_DATABASE: uvlhubdb
```

```
MARIADB_TEST_DATABASE: uvlhubdb_test
```

```
MARIADB_USER: uvlhubdb_user
```

```
MARIADB_PASSWORD: uvlhubdb_password
```


```
MARIADB_ROOT_PASSWORD: uvlhubdb_root_password
```

```
Ln 16, Col 14 Spaces: 4 UTF-8 LF Python
```

Ejercicio Vagrant

Apartado 1

Da error porque no hay suficiente espacio

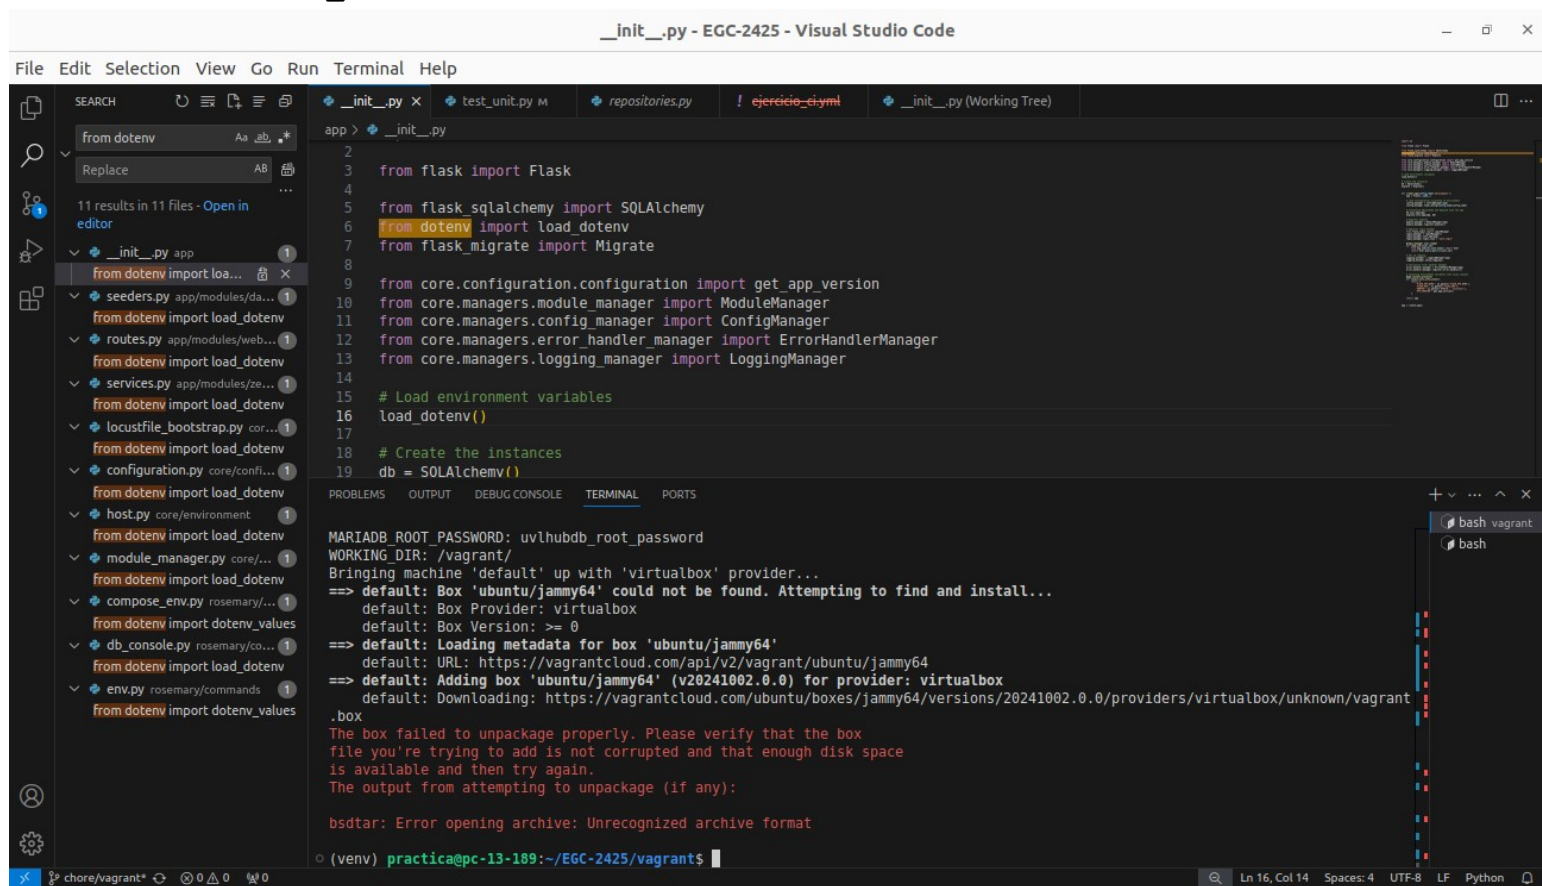

The screenshot shows the Visual Studio Code interface. The editor is open to a file named `__init__.py` in the `EGC-2425` project. The file contains Python code for a Flask application, including imports for `Flask`, `SQLAlchemy`, `load_dotenv`, `Migrate`, and various configuration and manager classes. The terminal window at the bottom shows the output of a `vagrant` command. The output indicates that the box `'ubuntu/jammy64'` could not be found and is being attempted to be installed. However, the installation fails with the error: `bsdtar: Error opening archive: Unrecognized archive format`. The terminal also shows the box provider as `virtualbox` and the box version as `>= 0`.

```
__init__.py - EGC-2425 - Visual Studio Code

File Edit Selection View Go Run Terminal Help

SEARCH from_dotenv Aa ab, *
Replace AB
11 results in 11 files - Open in editor
  __init__.py app 1
    from_dotenv import load_dotenv
  seeders.py app/modules/da... 1
    from_dotenv import load_dotenv
  routes.py app/modules/web... 1
    from_dotenv import load_dotenv
  services.py app/modules/ze... 1
    from_dotenv import load_dotenv
  locustfile_bootstrap.py cor... 1
    from_dotenv import load_dotenv
  configuration.py core/confi... 1
    from_dotenv import load_dotenv
  host.py core/environment 1
    from_dotenv import load_dotenv
  module_manager.py core/... 1
    from_dotenv import load_dotenv
  compose_env.py rosemary/... 1
    from_dotenv import load_dotenv
  db_console.py rosemary/co... 1
    from_dotenv import load_dotenv
  env.py rosemary/commands 1
    from_dotenv import load_dotenv

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
MARIADB_ROOT_PASSWORD: uvlhubdb_root_password
WORKING DIR: /vagrant/
Bringing machine 'default' up with 'virtualbox' provider...
==> default: Box 'ubuntu/jammy64' could not be found. Attempting to find and install...
default: Box Provider: virtualbox
default: Box Version: >= 0
==> default: Loading metadata for box 'ubuntu/jammy64'
default: URL: https://vagrantcloud.com/api/v2/vagrant/ubuntu/jammy64
==> default: Adding box 'ubuntu/jammy64' (v20241002.0.0) for provider: virtualbox
default: Downloading: https://vagrantcloud.com/ubuntu/boxes/jammy64/versions/20241002.0.0/providers/virtualbox/unknown/vagrant
.box
The box failed to unpack properly. Please verify that the box
file you're trying to add is not corrupted and that enough disk space
is available and then try again.
The output from attempting to unpack (if any):
bsdtar: Error opening archive: Unrecognized archive format

(venv) practica@pc-13-189: ~/EGC-2425/vagrants
```