


Bash Shell > 일반 변수

단계1: 변수 선언

- 사용법: <변수명>=<변수값>
- 띄어쓰면, 오류발생

```
username=tom
```

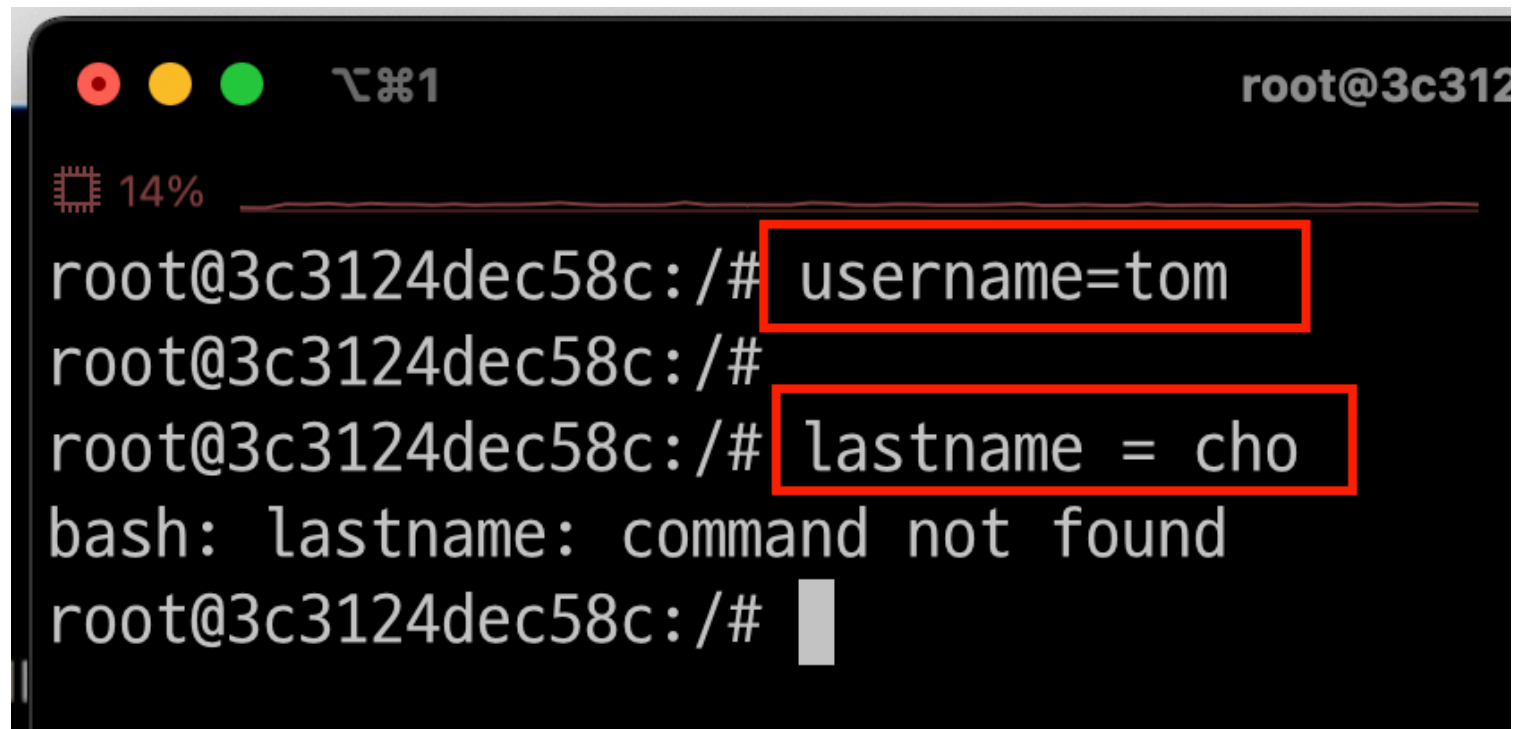

A terminal window with a dark background and light text. The window title bar shows three colored circles (red, yellow, green) and the text 'root@3c312'. The terminal content shows the following sequence of commands and output:


```
root@3c3124dec58c:/# username=tom
root@3c3124dec58c:/#
root@3c3124dec58c:/# lastname = cho
bash: lastname: command not found
root@3c3124dec58c:/#
```

The commands `username=tom` and `lastname = cho` are highlighted with red rectangular boxes. The output `bash: lastname: command not found` is shown below the second command.

단계2: 변수 확인

- 사용법: echo \$<변수명>

```
echo $username
```

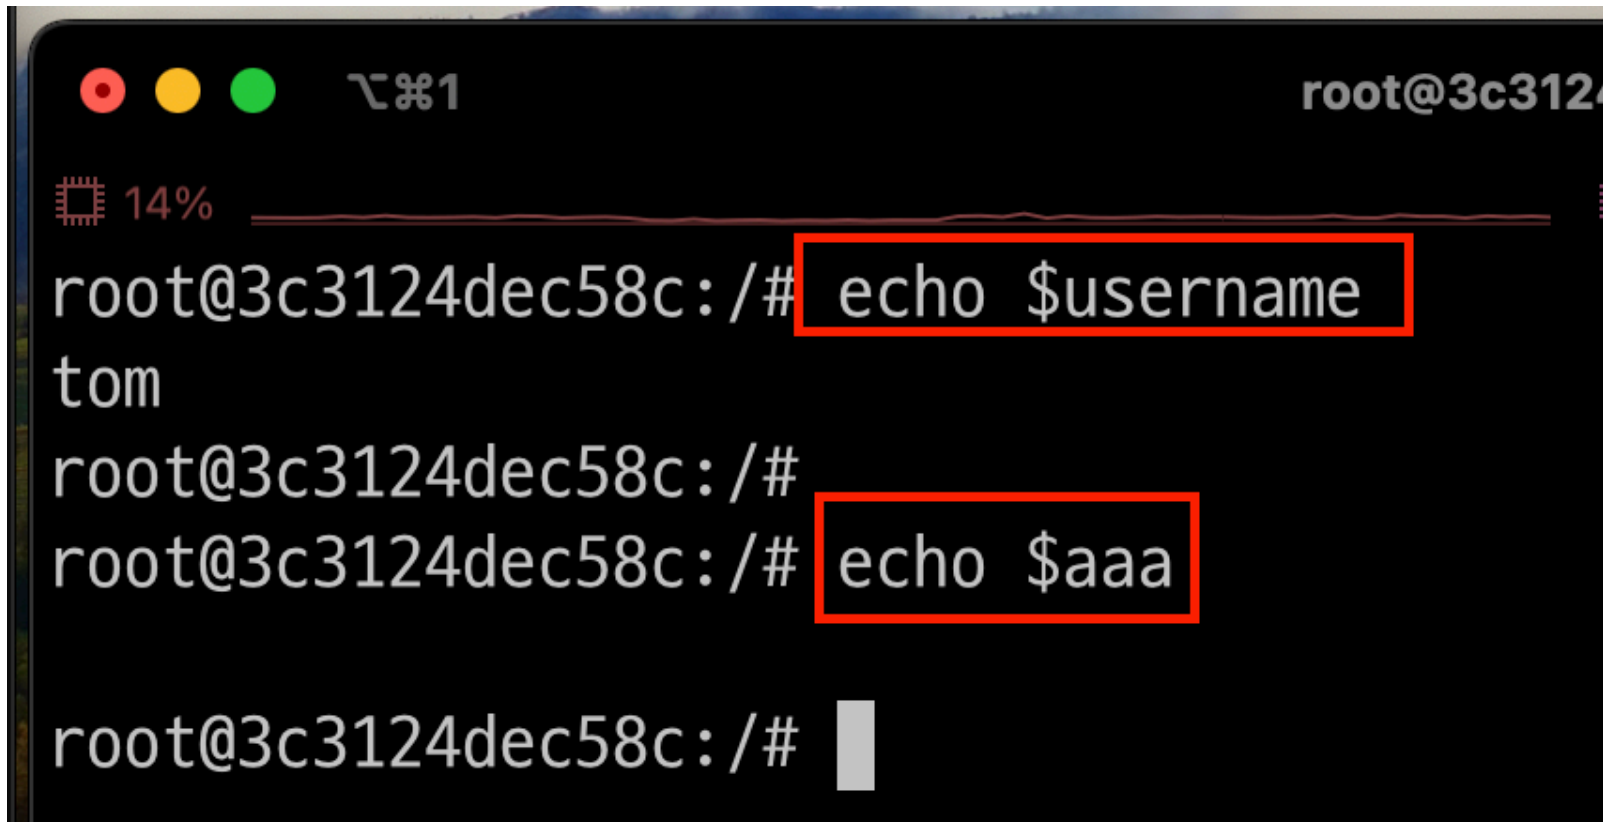A terminal window with a dark background and light text. The window title bar shows three colored circles (red, yellow, green) and the text 'ㄴ₩1'. The top right corner shows 'root@3c3124'. The terminal content shows the command 'echo \$username' being entered and executed, resulting in the output 'tom'. The command 'echo \$aaa' is also entered and highlighted with a red box. The prompt 'root@3c3124dec58c: /#' is visible throughout. A battery icon and '14%' are shown in the top left of the terminal area.

```
root@3c3124dec58c: /# echo $username
tom
root@3c3124dec58c: /#
root@3c3124dec58c: /# echo $aaa
root@3c3124dec58c: /#
```

단계3: 전체 변수 조회


```
set # 전체 변수 조회  
set | grep username # 전체 변수 중 username 조회
```

```
PWD=/  
SHELL=/bin/bash  
SHELLOPTS=braceexpand:emacs:hashall:histexpand:history:interactive-comments:monitor  
SHLVL=1  
TERM=xterm  
UID=0  
_=clear  
username=tom  
root@3c3124dec58c:/# set | grep username  
username=tom  
root@3c3124dec58c:/#
```

단계4: 변수 삭제

- 명령어: unset <변수명>

```
unset username
```

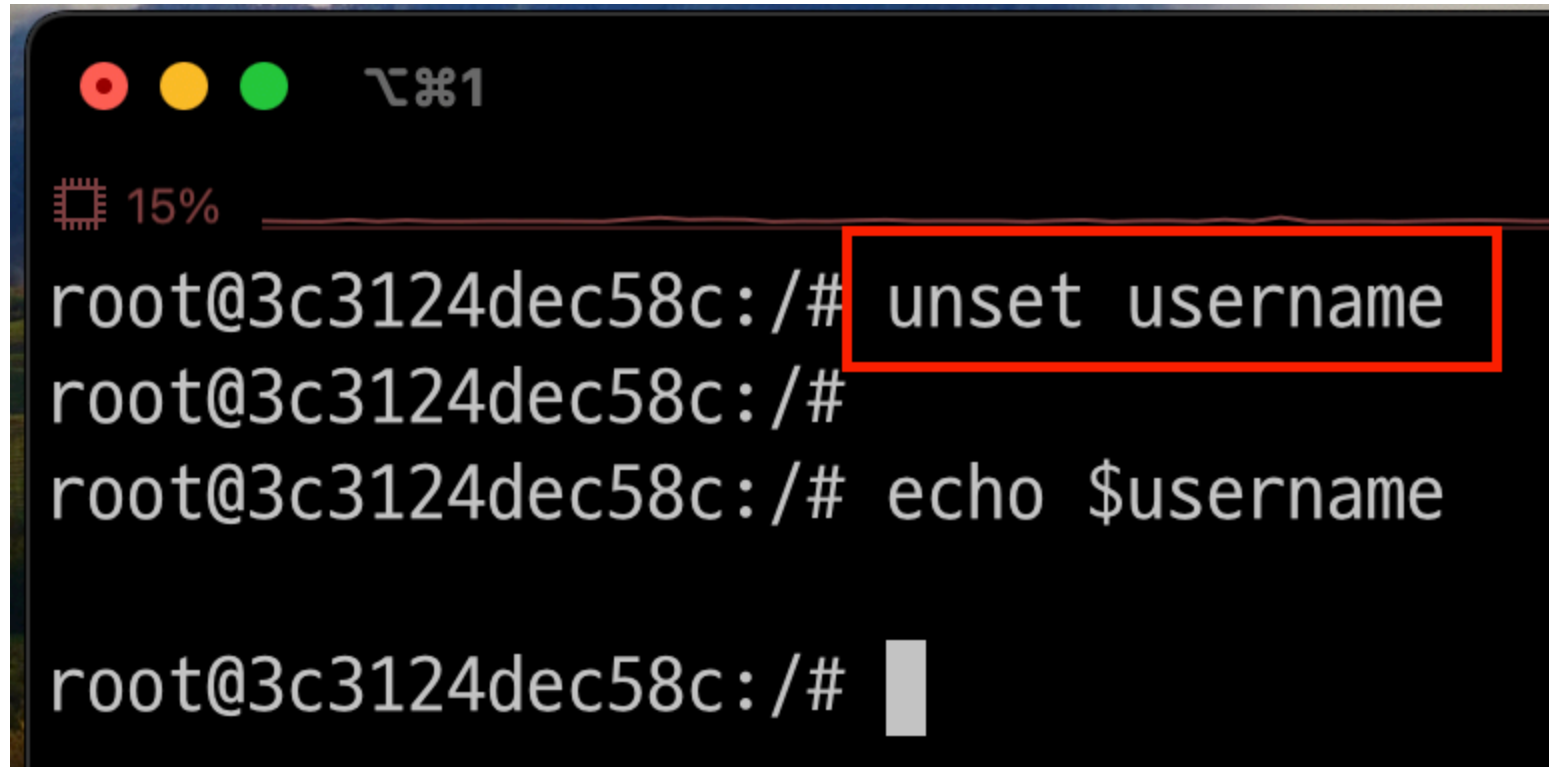

A terminal window with a dark background and light gray text. The window title bar shows three colored circles (red, yellow, green) and the text 'ㄴ%1'. The terminal content shows the following sequence of commands and prompts:

```
root@3c3124dec58c:/# unset username
root@3c3124dec58c:/#
root@3c3124dec58c:/# echo $username
root@3c3124dec58c:/#
```

The command 'unset username' is highlighted with a red rectangular box.


Bash Shell > 환경 변수

- 동작되는 프로그램에 영향을 주는 변수
- 일반적으로 환경변수명은 대문자를 사용함

단계1: 환경변수 선언

- 사용법: `export <변수명>=<변수값>`

```
export NAME=tom  
echo $NAME
```

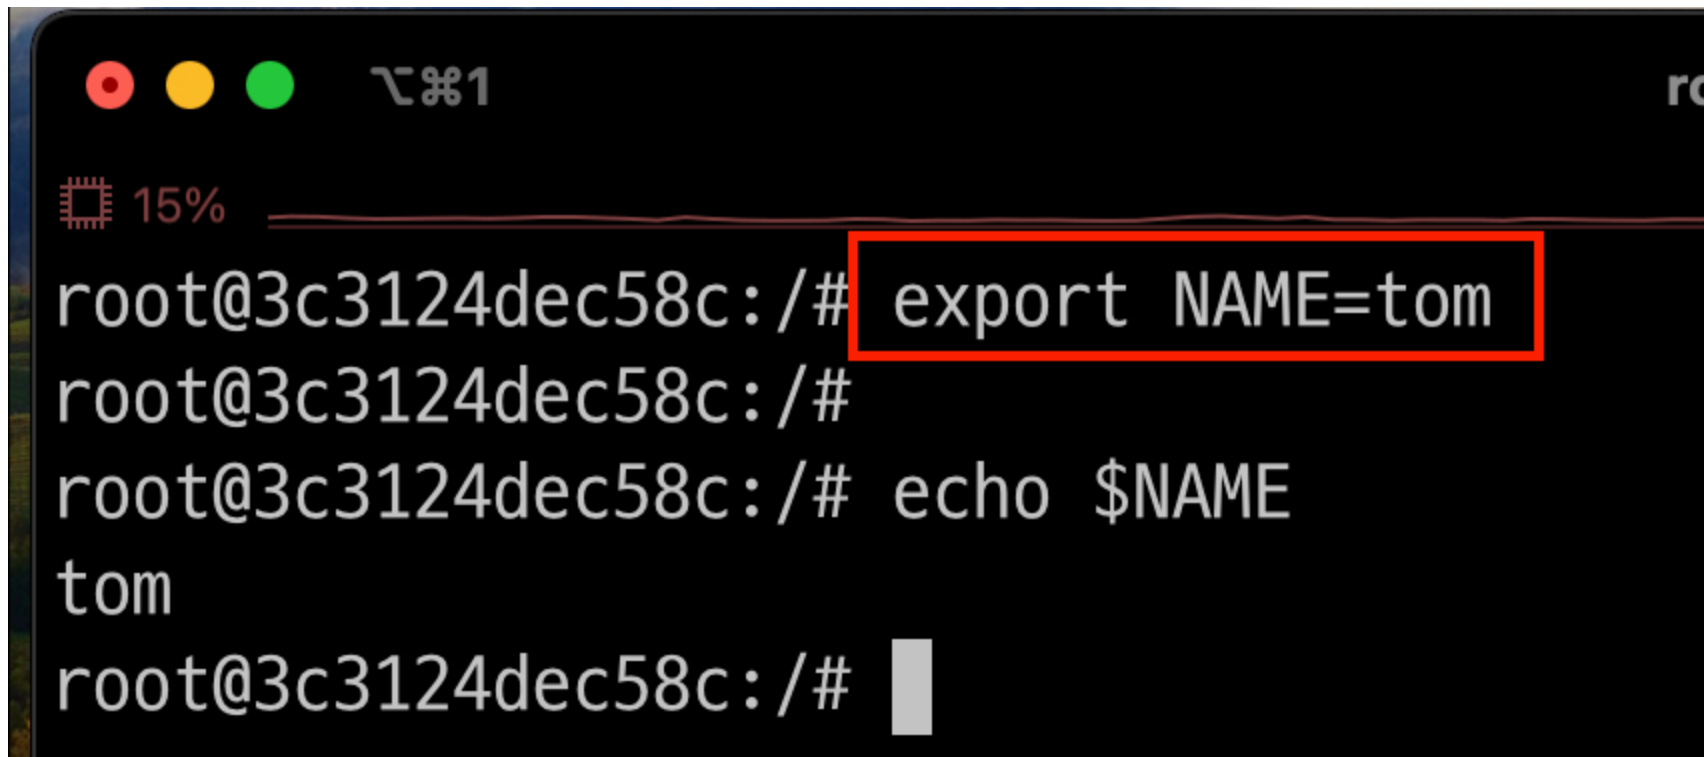A terminal window with a dark background and light gray text. The window has three colored window control buttons (red, yellow, green) at the top left. The terminal shows the following sequence of commands and output:
1. Prompt: `root@3c3124dec58c: /#`
2. Command: `export NAME=tom` (This line is highlighted with a red rectangular box)
3. Prompt: `root@3c3124dec58c: /#`
4. Command: `echo $NAME`
5. Output: `tom`
6. Prompt: `root@3c3124dec58c: /#` followed by a gray cursor bar.

```
root@3c3124dec58c: /# export NAME=tom  
root@3c3124dec58c: /#  
root@3c3124dec58c: /# echo $NAME  
tom  
root@3c3124dec58c: /#
```


단계2: 환경변수 전체 조회

env # 환경변수 전체 조회

```
root@3c3124dec58c:/# env
HOSTNAME=3c3124dec58c
NAME=tom
PWD=/
HOME=/root
```

- 환경변수 중 NAME 조회

```
env | grep NAME # 환경변수 중 NAME 조회
```

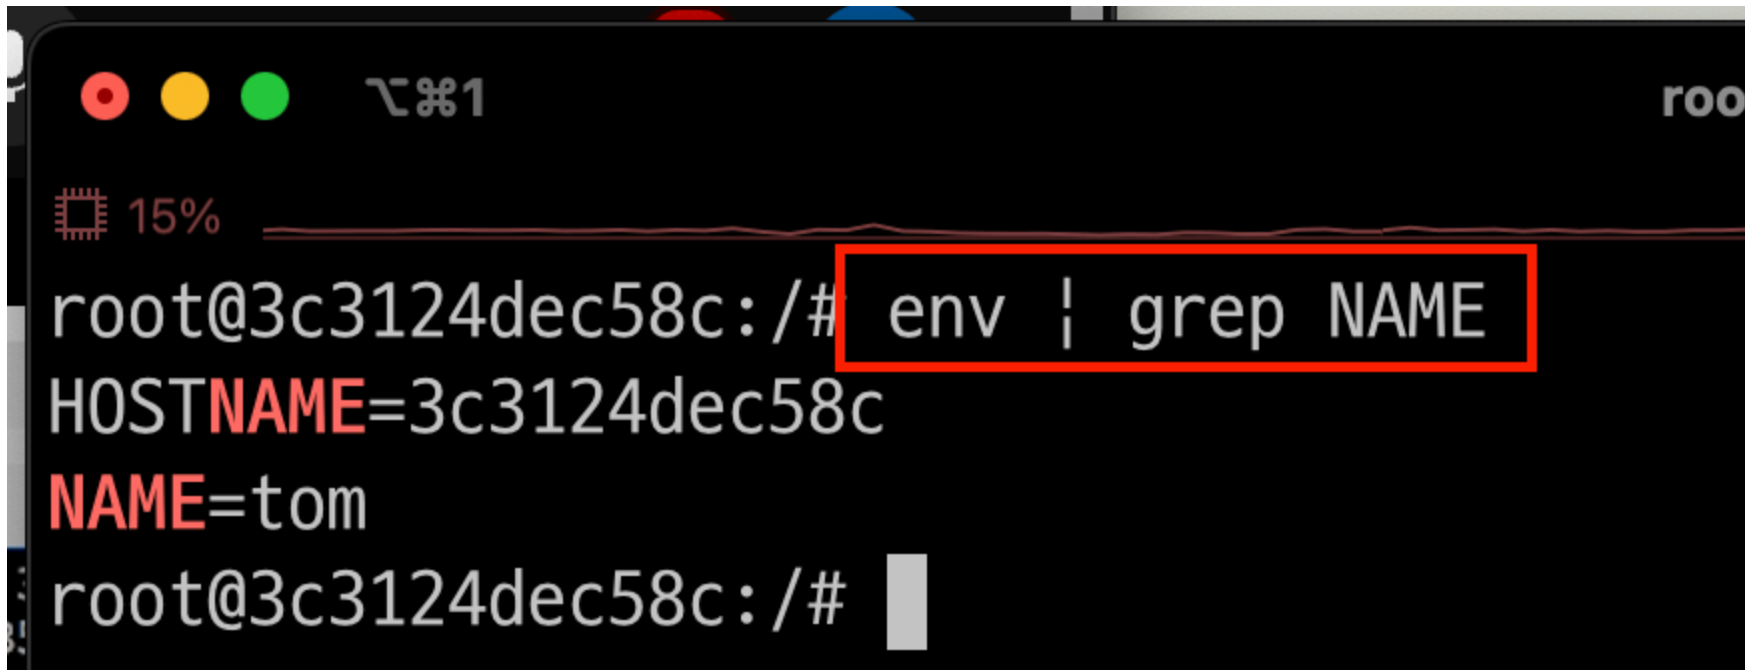

A terminal window with a dark background and light gray text. The window title bar shows three colored circles (red, yellow, green) and a keyboard icon. The terminal content shows the command `env | grep NAME` being executed, with the output `HOSTNAME=3c3124dec58c` and `NAME=tom`. The command and its output are highlighted with a red box.

```
root@3c3124dec58c:/# env | grep NAME
HOSTNAME=3c3124dec58c
NAME=tom
root@3c3124dec58c:/#
```