

shell script

- 셸 스크립트는 셸이나 명령 줄 인터프리터에서 돌아가도록 작성되었거나 한 운영 체제를 위해 쓰인 스크립트이다.
- 실행 퍼미션을 할당해야 실행 가능

단계1: bin 디렉토리 생성 및 이동

```
cd ~  
mkdir bin  
cd bin
```



A terminal window with a dark background and light-colored text. The window title bar shows three colored circles (red, yellow, green) and a symbol. The terminal content shows the following commands and output:

```
root@3c3124dec58c:~# mkdir bin  
root@3c3124dec58c:~# ls  
bin meta  
root@3c3124dec58c:~# cd bin  
root@3c3124dec58c:~/bin#
```

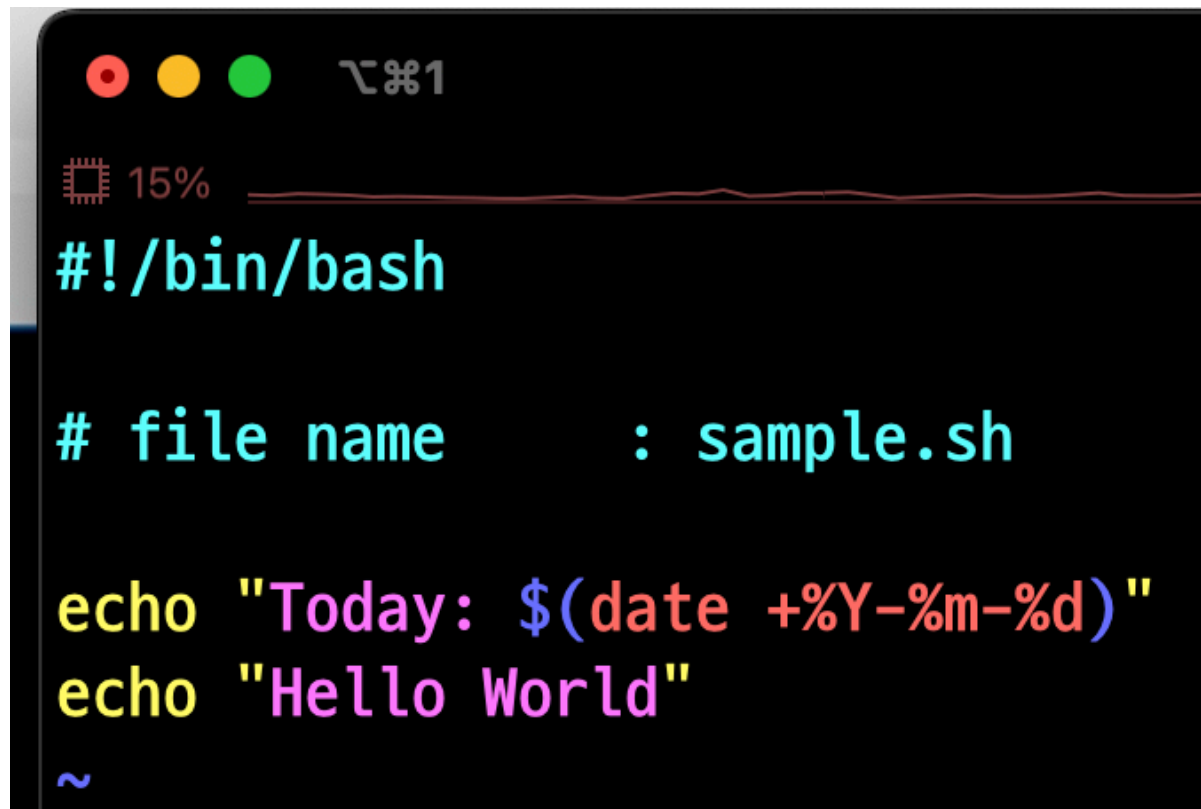
The commands `mkdir bin` and `cd bin` are highlighted with red rectangular boxes. The output `bin meta` is shown in blue text.

단계2: hello.sh

```
vim hello.sh  
# 아래내용 작성
```

- `#!/bin/bash` : bash 선언

```
#!/bin/bash  
# file name      : sample.sh  
echo "Today: $(date +%Y-%m-%d)"  
echo "Hello World"
```

A terminal window with a dark background and light-colored text. The window title bar shows three colored circles (red, yellow, green) and a symbol. The terminal content shows the script being executed, with the shebang line, file name, and two echo statements. The output of the script is visible at the bottom.

```
15%  
#!/bin/bash  
  
# file name      : sample.sh  
  
echo "Today: $(date +%Y-%m-%d)"  
echo "Hello World"  
~
```

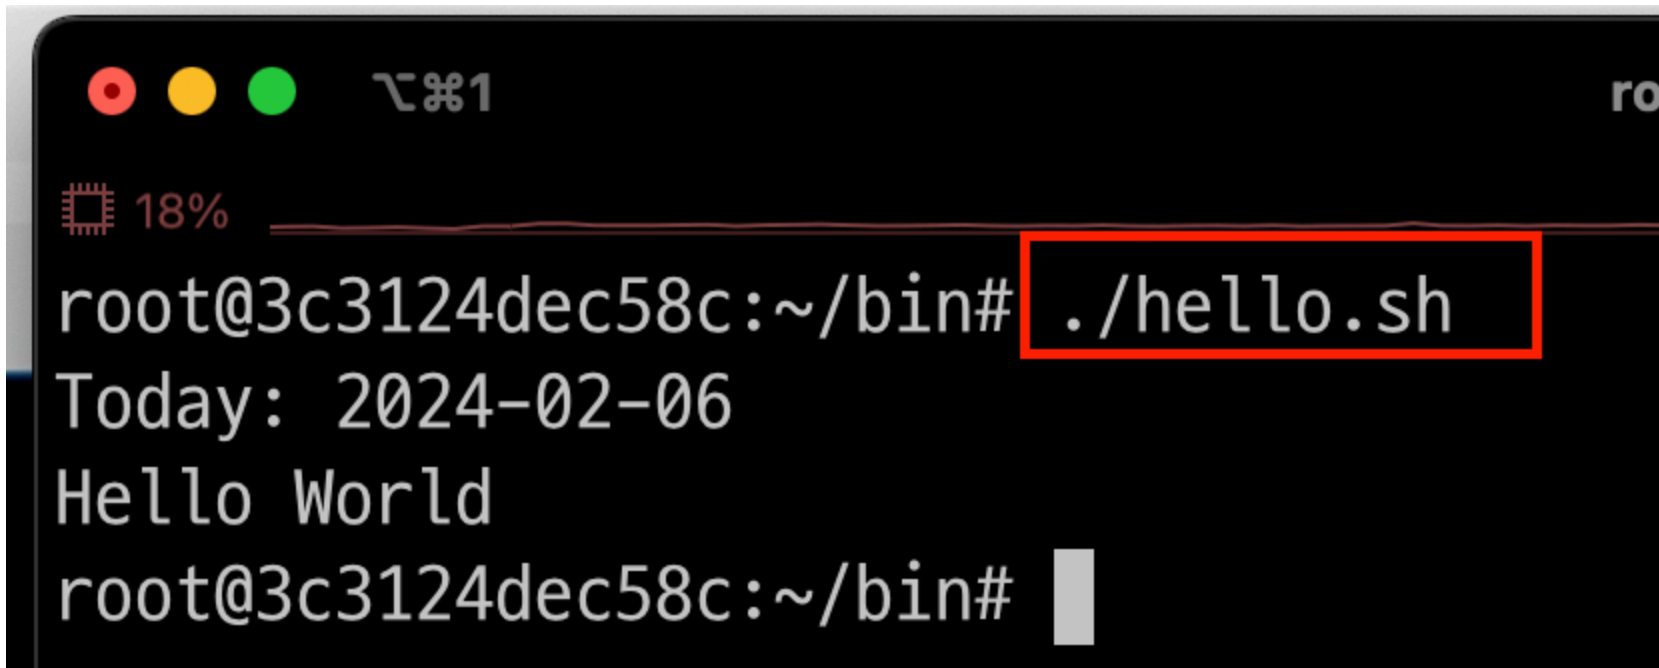
단계3: hello.sh > 실행권한 부여

```
ls -l
# 실행권한 부여
chmod +x hello.sh
ls -l
```

```
root@3c3124dec58c:~/bin# ls -l
total 4
-rw-r--r-- 1 root root 88 Feb  6 06:32 hello.sh
root@3c3124dec58c:~/bin#
root@3c3124dec58c:~/bin# chmod +x hello.sh
root@3c3124dec58c:~/bin#
root@3c3124dec58c:~/bin# ls -l
total 4
-rwxr-xr-x 1 root root 88 Feb  6 06:32 hello.sh
root@3c3124dec58c:~/bin#
```

단계4: hello.sh > 실행

```
./hello.sh
```

A terminal window with a dark background and light gray text. The window title bar shows three colored circles (red, yellow, green) and the text 'ㄴ%1'. The terminal content shows the command './hello.sh' being executed, followed by the output 'Today: 2024-02-06' and 'Hello World'. The prompt 'root@3c3124dec58c:~/bin#' is visible before and after the command. A red rectangular box highlights the command './hello.sh'.

```
root@3c3124dec58c:~/bin# ./hello.sh
Today: 2024-02-06
Hello World
root@3c3124dec58c:~/bin#
```

단계5: PATH 적용 후 실행

- PATH에 bin 디렉토리를 등록하면, 다른 곳에서도 shell script명을 이용해서 쉽게 실행할 수 있음

```
PATH=$PATH:~/bin # PATH 추가  
hello.sh # 다른 디렉토리에서도 쉽게 실행 가능함
```

```
root@3c3124dec58c:~# echo $PATH  
/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin  
root@3c3124dec58c:~# PATH=$PATH:~/bin  
root@3c3124dec58c:~# echo $PATH  
/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin:/root/bin  
root@3c3124dec58c:~# hello.sh  
Today: 2024-02-06  
Hello World  
root@3c3124dec58c:~# pwd  
/root  
root@3c3124dec58c:~#
```