


반복문

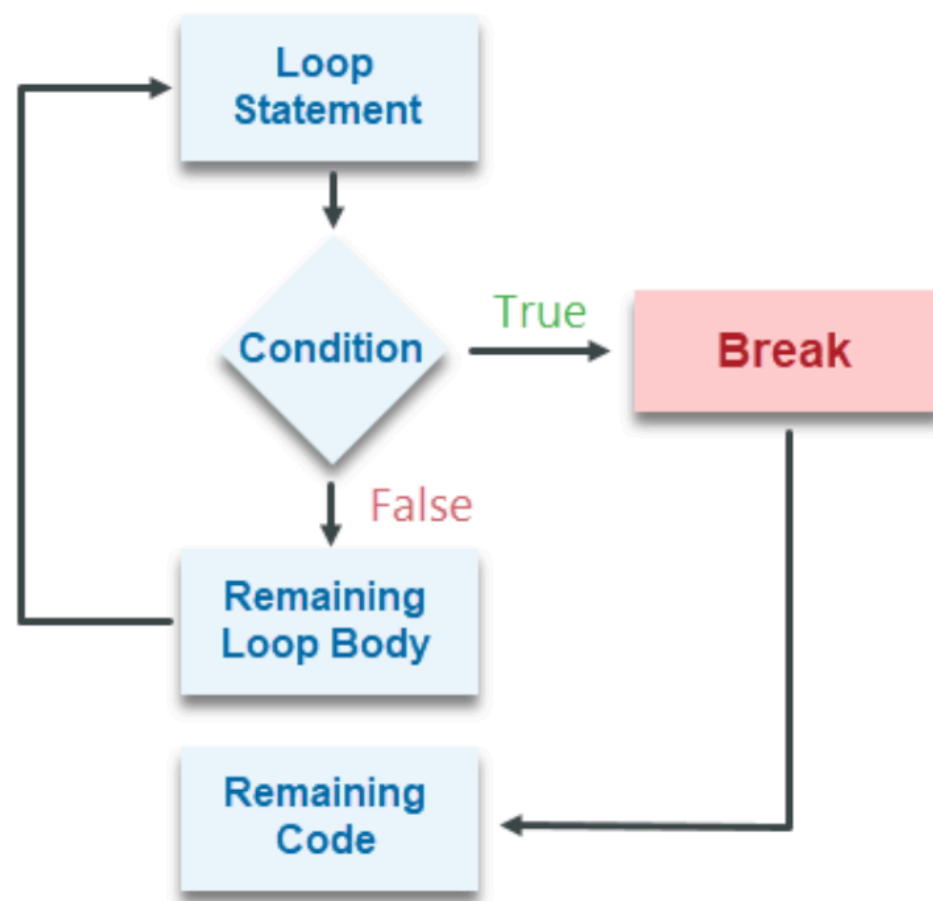

while loop

- while 반복문은 조건이 발생할 때까지 명령을 지속적으로 실행한다.

단계1: loop1.sh 작성

```
cd ~/bin  
vim loop1.sh
```

```
#!/bin/sh  
  
a=0  
while [ $a -lt 10 ]  
do  
    echo $a  
    a=`expr $a + 1`  
done
```

단계2: loop1.sh 권한 변경 및 실행

```
chmod +x loop1.sh  
loop1.sh
```

```
root@3c3124dec58c:~/bin# chmod +x loop1.sh  
root@3c3124dec58c:~/bin#  
root@3c3124dec58c:~/bin# loop1.sh
```

```
0  
1  
2  
3  
4  
5  
6  
7  
8  
9
```

```
root@3c3124dec58c:~/bin#
```

for loop

- for 반복문은 리스트에 저장된 명령이 실행할 때까지 반복적으로 실행한다.


단계1: loop2.sh 작성

```
cd ~/bin  
vim loop2.sh
```

```
#!/bin/bash  
  
for var in 1 2 a 4 HELLO  
do  
    echo $var  
done
```

단계2: loop2.sh 권한 변경 및 실행

```
chmod +x loop2.sh  
loop2.sh
```

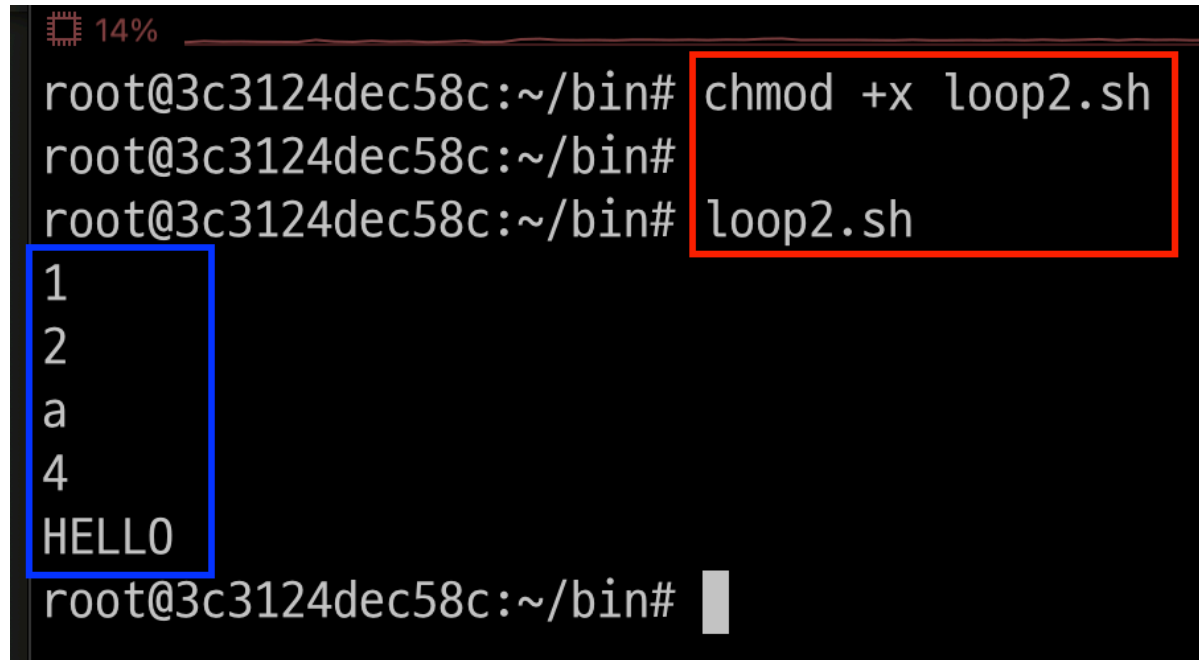

A terminal window with a black background and white text. The top status bar shows a battery icon and '14%'. The prompt is 'root@3c3124dec58c:~/bin#'. The first command 'chmod +x loop2.sh' is highlighted with a red box. The second command 'loop2.sh' is also highlighted with a red box. The output of the script is displayed in a blue box: '1', '2', 'a', '4', and 'HELLO'. The prompt 'root@3c3124dec58c:~/bin#' is visible at the bottom with a cursor.

```
root@3c3124dec58c:~/bin# chmod +x loop2.sh  
root@3c3124dec58c:~/bin#  
root@3c3124dec58c:~/bin# loop2.sh  
1  
2  
a  
4  
HELLO  
root@3c3124dec58c:~/bin#
```

break continue

- break: 반복문 종료
- continue: 해당 반복 상황을 종료하고 다음 조건상태로 반복문 실행

단계1: loop3.sh 작성

```
cd ~/bin  
vim loop3.sh
```

```
#!/bin/bash

for ((i=0; i<=10; i++))
do
    if [ $i -eq 5 ]
    then
        continue
    fi

    if [ $i -eq 8 ]
    then
        break
    fi

    echo $i
done
```

단계2: loop3.sh 권한 변경 및 실행

```
chmod +x loop3.sh  
loop3.sh
```

```
root@3c3124dec58c:~/bin# chmod +x loop3.sh  
root@3c3124dec58c:~/bin#  
root@3c3124dec58c:~/bin# loop3.sh  
0  
1  
2  
3  
4  
6  
7  
root@3c3124dec58c:~/bin#
```