

# Shell

- Shell(셸)은 커널과 사용자 사이를 이어주는 역할을 해준다.
- Shell은 하나의 명령어 처리기(Command Processor)이다.

## Shell 종류


- Bourne-Again Shell (bash) : 리눅스에서 가장 많이 사용하는 셸
- Bourne Shell (sh) : 최초의 셸

그 외에도 다양한 셸이 존재함

# Bash Shell

## 단계1: 설치된 Shell 확인

```
cat /etc/shells
```

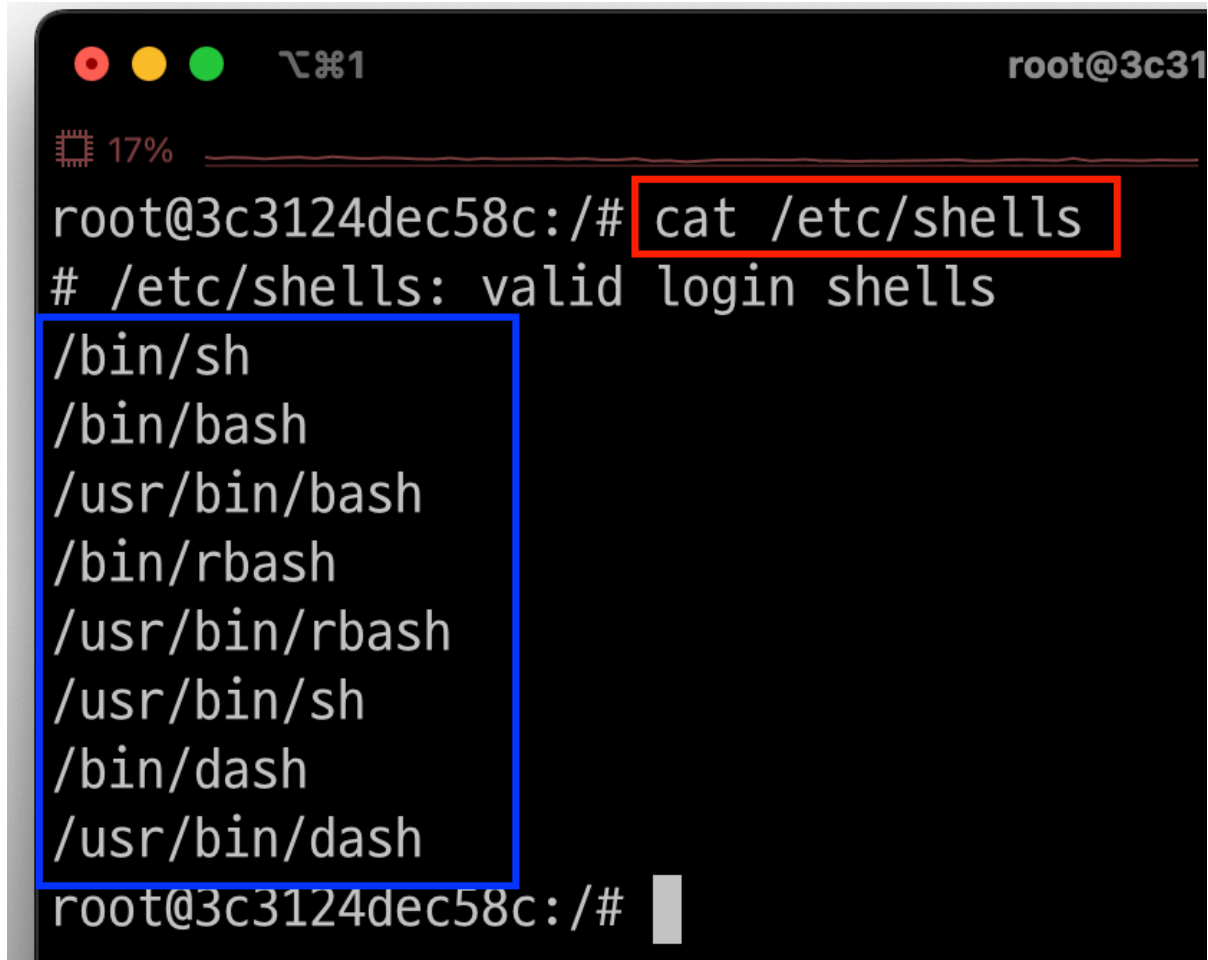


A terminal window with a dark background. The title bar shows three colored circles (red, yellow, green) and the text 'root@3c31'. The terminal content shows the command 'cat /etc/shells' being executed, with the output listing valid login shells. The command and its output are highlighted with a red and blue box respectively.

```
root@3c3124dec58c:/# cat /etc/shells
# /etc/shells: valid login shells
/bin/sh
/bin/bash
/usr/bin/bash
/bin/rbash
/usr/bin/rbash
/usr/bin/sh
/bin/dash
/usr/bin/dash
root@3c3124dec58c:/#
```

## 단계2: 현재 지정된 Shell 확인

```
echo $SHELL
```

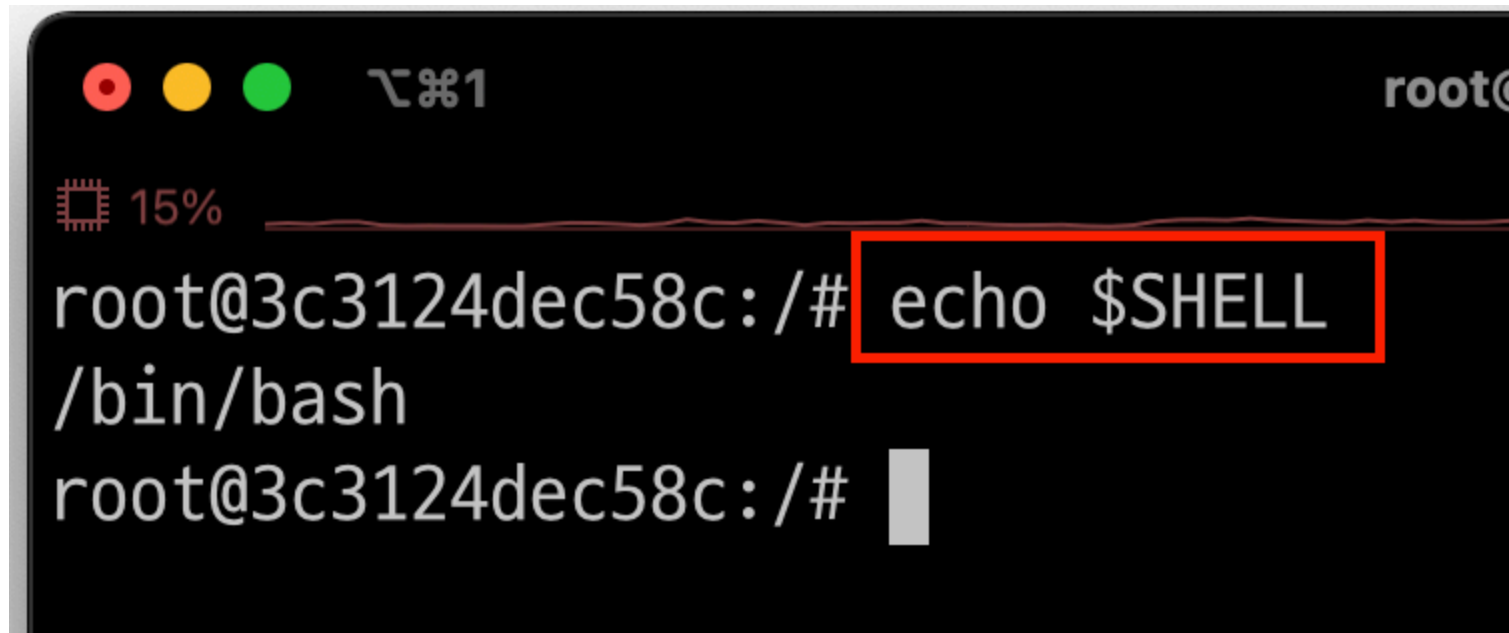A terminal window with a dark background. The title bar shows three colored circles (red, yellow, green) and the text 'root@'. The terminal content shows a prompt 'root@3c3124dec58c: /#' followed by the command 'echo \$SHELL' which is highlighted with a red rectangular box. Below this, the output '/bin/bash' is visible. The prompt 'root@3c3124dec58c: /#' is followed by a white cursor bar.

```
root@3c3124dec58c: /# echo $SHELL
/bin/bash
root@3c3124dec58c: /#
```

## 1. bash 변수

## 2. bash Metacharacters

## 3. shell script

## 4. Positional Parameters

## 5. if then fi

## 6. loop