

단계1: 도커 버전 확인

```
docker --version
```

🔌 14%

good593 🐵 ➡ ~/dev/docker

▶ **docker** --version

Docker version 20.10.21, build baeda1f

good593 🐵 ➡ ~/dev/docker

▶ █

단계2: 도커 이미지 조회

```
docker images
```

```
14% 9.8 GB
good593 🐵 ~/dev/docker
▶ docker images
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE
ubuntu        latest    bf9e5b7213b4   4 months ago  69.2MB
mysql         latest    54fea0bc79f9   6 months ago  599MB
good593 🐵 ~/dev/docker
▶ █
```

단계3: Docker Hub > nginx 이미지 조회

- 명령어: `docker search <이미지이름>`

```
docker search nginx
```

```
good593 🐒 ~/dev/docker
> docker search nginx
```

NAME	DESCRIPTION	STARS	OFFICIAL	AUTOMATED
nginx	Official build of Nginx.	19552	[OK]	
bitnami/nginx	Bitnami nginx Docker Image	181		[OK]
nginxinc/nginx-unprivileged	Unprivileged NGINX Dockerfiles	140		
nginxproxy/acme-companion	Automated ACME SSL certificate generation fo...	130		
nginxproxy/nginx-proxy	Automated nginx proxy for Docker containers ...	129		

단계4: Docker Hub > nginx 이미지 다운로드


- 명령어: `docker pull <이미지이름>`

```
docker pull nginx
```

```
good593 🐵 ~/dev/docker  
▶ docker pull nginx  
Using default tag: latest  
latest: Pulling from library/nginx  
a5573528b1f0: Pull complete  
8897d65c8417: Pull complete  
fbc138d1d206: Pull complete  
06f386eb9182: Pull complete  
aeb2f3db77c3: Pull complete  
64fb762834ec: Pull complete  
e5a7e61f6ff4: Pull complete  
Digest: sha256:4c0fdaa8b6341bfdeca5f18f7837462c80cff90527ee35ef185571e1c327beac  
Status: Downloaded newer image for nginx:latest  
docker.io/library/nginx:latest  
good593 🐵 ~/dev/docker
```

단계5: 도커 이미지 조회 > nginx 이미지 확인

```
docker images
```

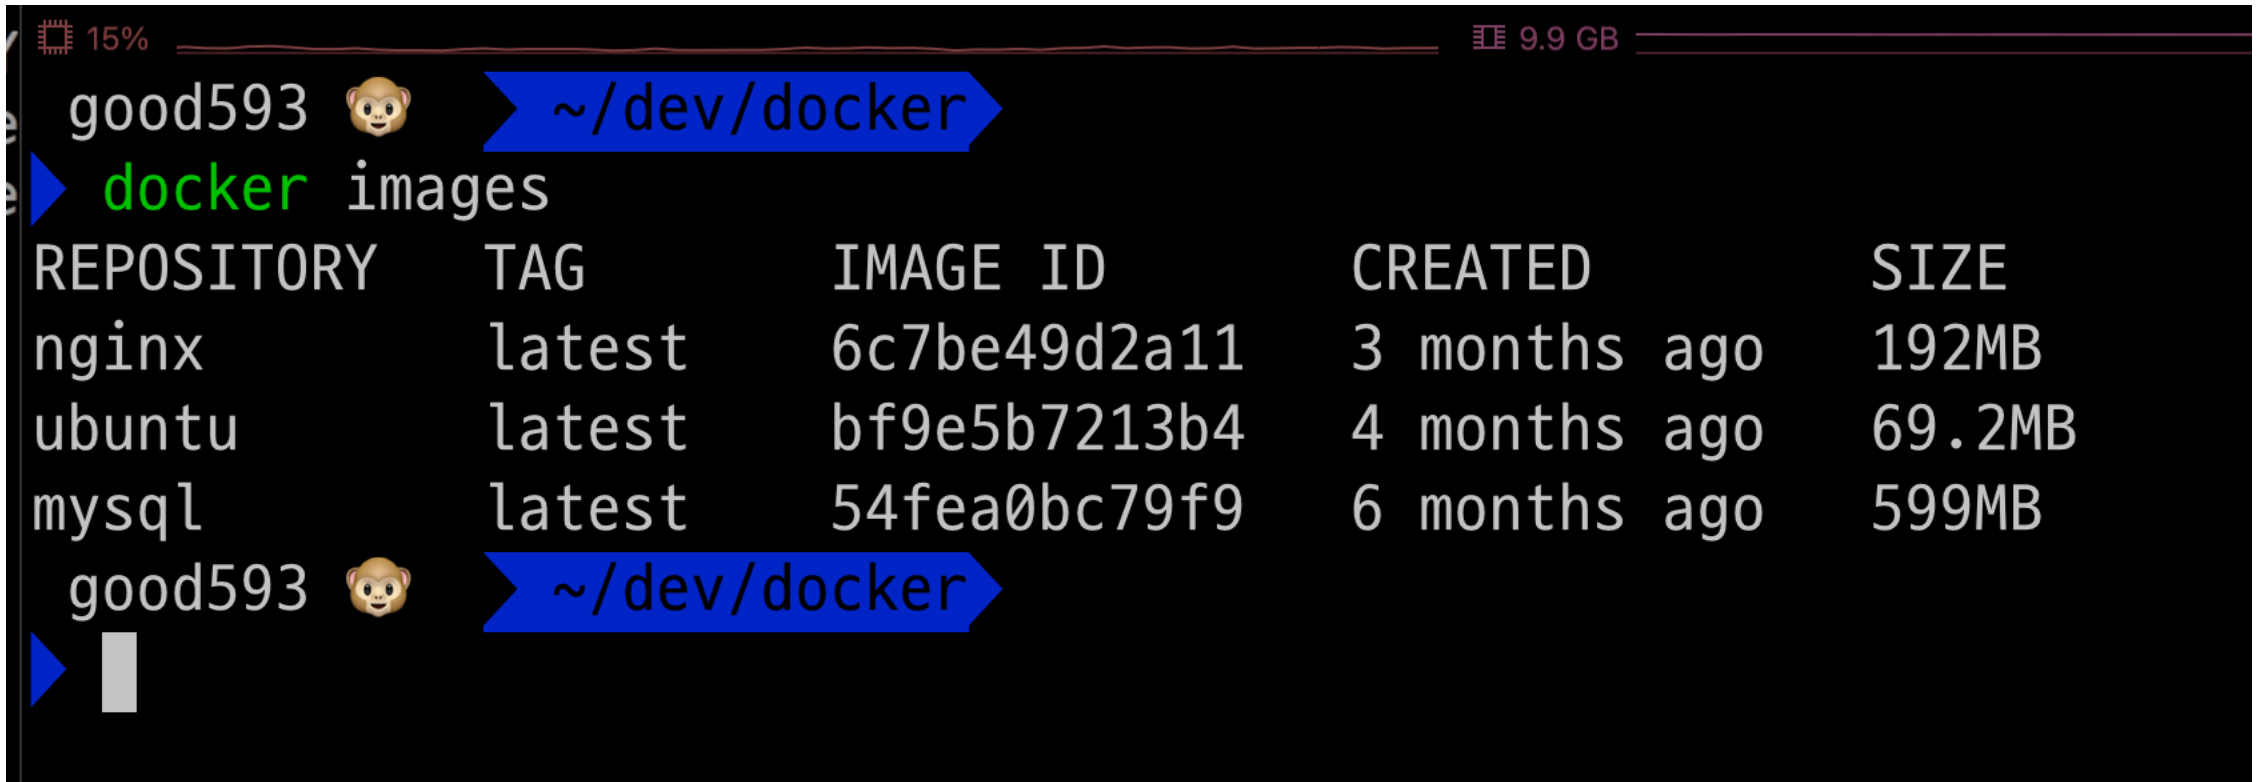


```
good593 ~ /dev/docker
> docker images
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE
nginx         latest    6c7be49d2a11   3 months ago  192MB
ubuntu        latest    bf9e5b7213b4   4 months ago  69.2MB
mysql         latest    54fea0bc79f9   6 months ago  599MB
good593 ~ /dev/docker
> █
```

단계6: nginx 이미지 > 컨테이너 생성

- 명령어: `docker run --name <컨테이너이름> -d -p 80:80 <이미지이름>`
 - `-d` : 백그라운드 모드로 실행
 - `-p` : 포트 연결

```
docker run --name web -d -p 80:80 nginx
```

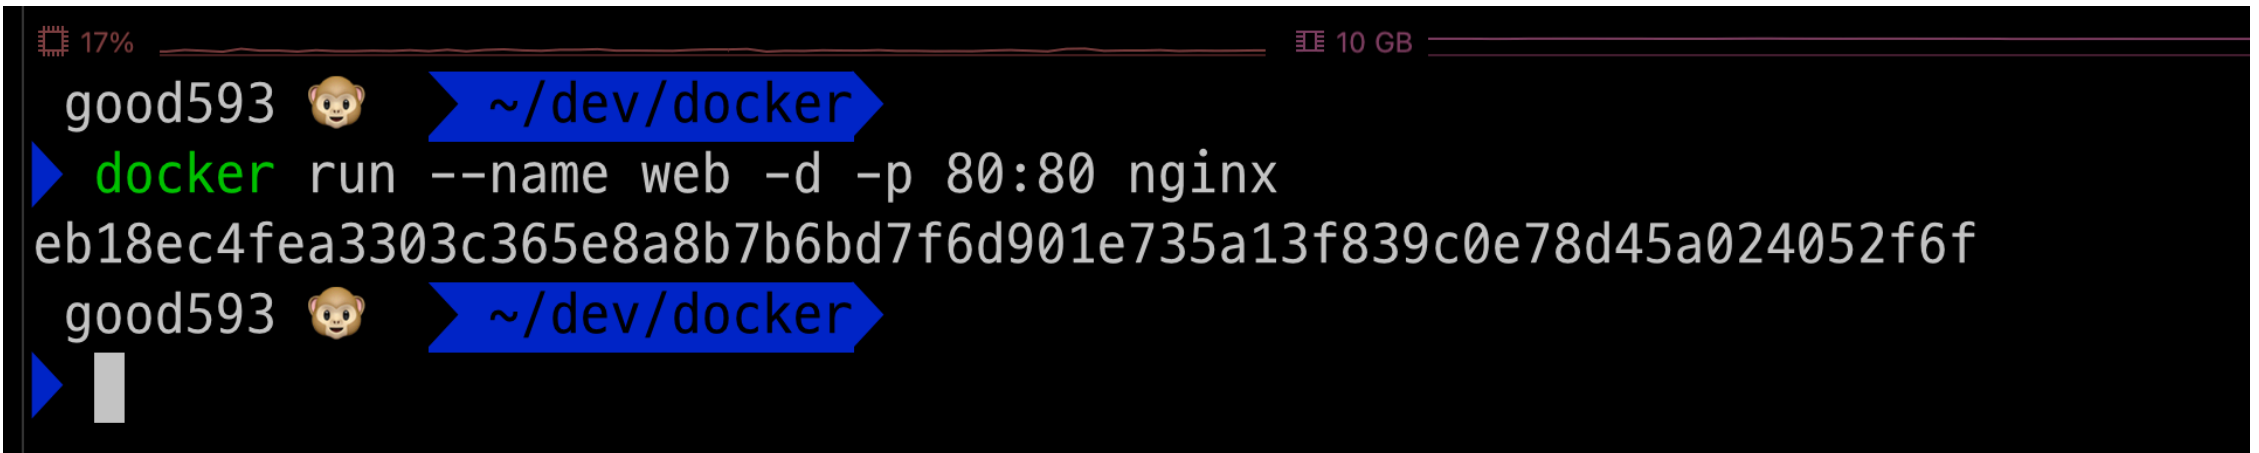

```
17% 10 GB
good593 ~/dev/docker
> docker run --name web -d -p 80:80 nginx
eb18ec4fea3303c365e8a8b7b6bd7f6d901e735a13f839c0e78d45a024052f6f
good593 ~/dev/docker
>
```


단계7: 실행 중인 컨테이너 > nginx 컨테이너 확인

```
docker ps
```

```
good593 🐵 ~/dev/docker
> docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS                               NAMES
eb18ec4fea33   nginx    "/docker-entrypoint...." 4 minutes ago  Up 4 minutes  0.0.0.0:80->80/tcp                 web
fd6f8e571db3   mysql    "docker-entrypoint.s..." 3 months ago   Up 5 hours    0.0.0.0:3306->3306/tcp, 33060/tcp  docker-db-1
good593 🐵 ~/dev/docker
> █
```

단계8: nginx 서버 접속

- <http://localhost:80/>

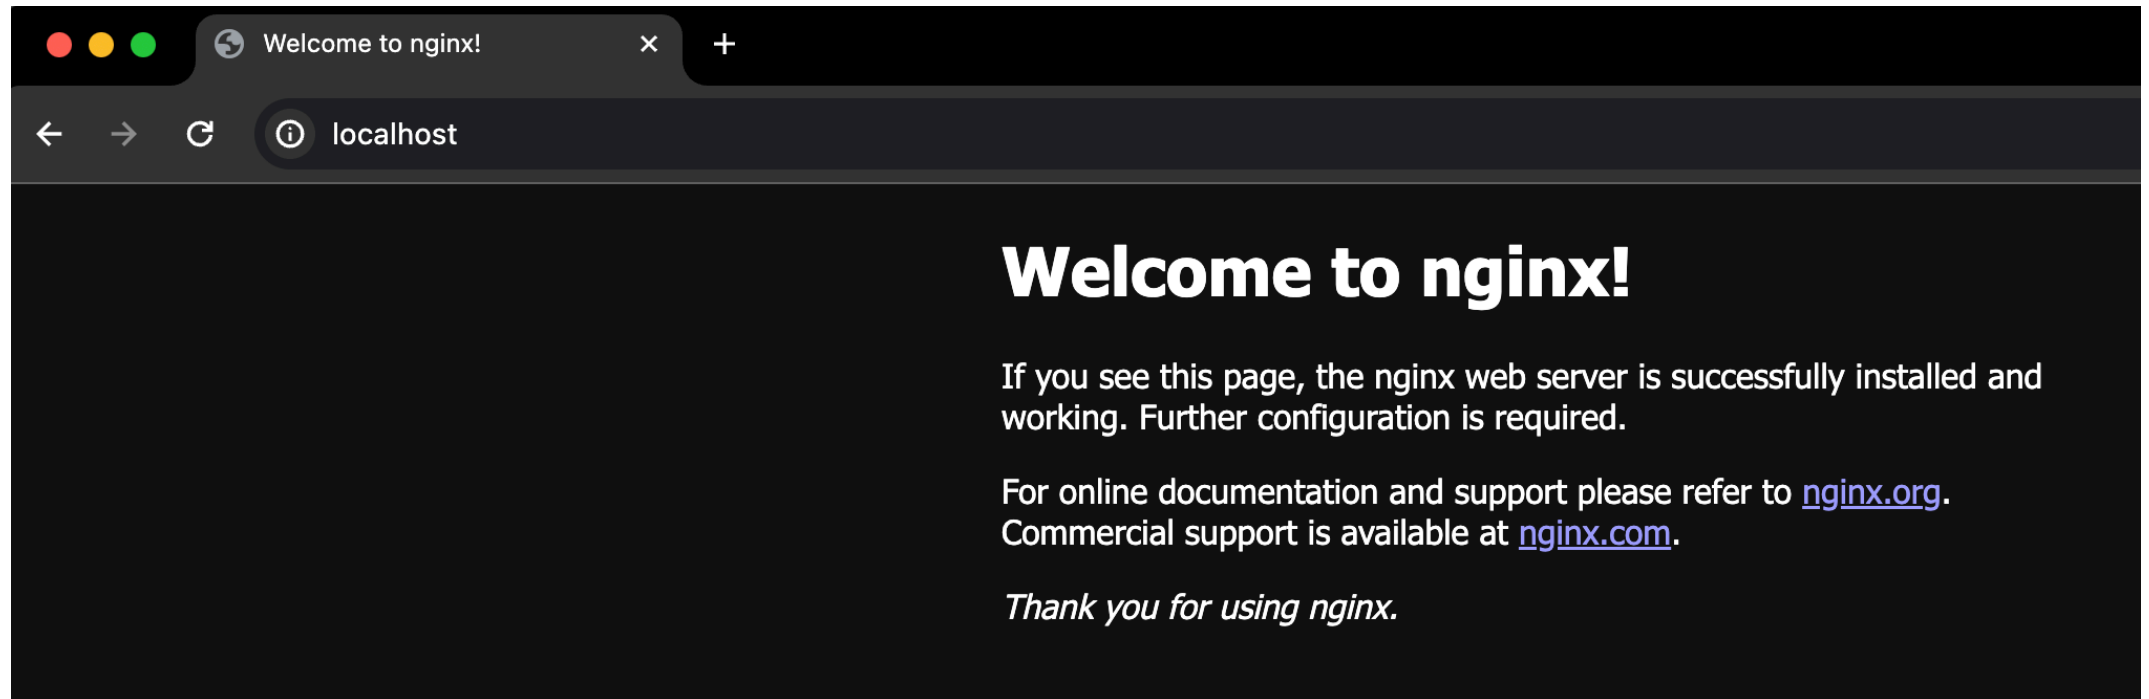


단계9: nginx 컨테이너 중지

- 명령어: `docker stop <컨테이너이름>`

```
docker stop web
```

```
docker ps # 실행 중인 컨테이너들 중에 web(nginx) 없음
```

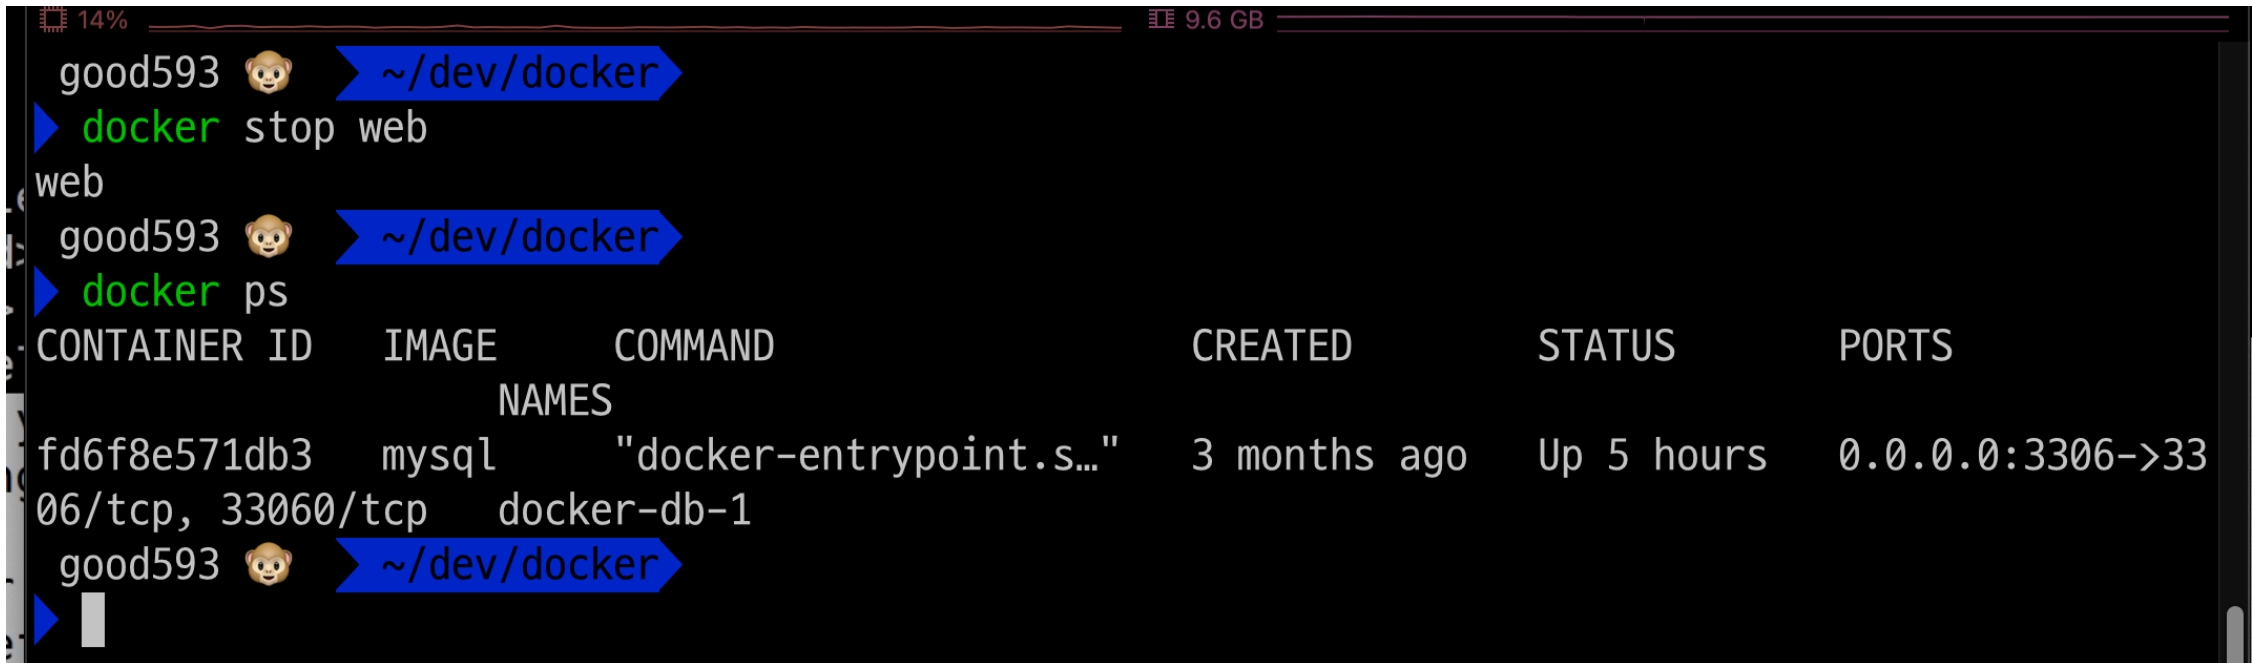


The terminal screenshot shows a user named 'good593' at the prompt '~ /dev/docker'. They enter the command 'docker stop web', which returns 'web'. Then they enter 'docker ps', which returns a table of running containers. The table has columns: CONTAINER ID, IMAGE, COMMAND, CREATED, STATUS, and PORTS. One container is listed: fd6f8e571db3, image mysql, command 'docker-entrypoint.s...', created 3 months ago, status 'Up 5 hours', and ports '0.0.0.0:3306->3306/tcp, 33060/tcp'. The container name 'docker-db-1' is also shown.

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS
fd6f8e571db3	mysql	"docker-entrypoint.s..."	3 months ago	Up 5 hours	0.0.0.0:3306->3306/tcp, 33060/tcp

단계10: nginx 서버 접속 불가

- <http://localhost:80/>

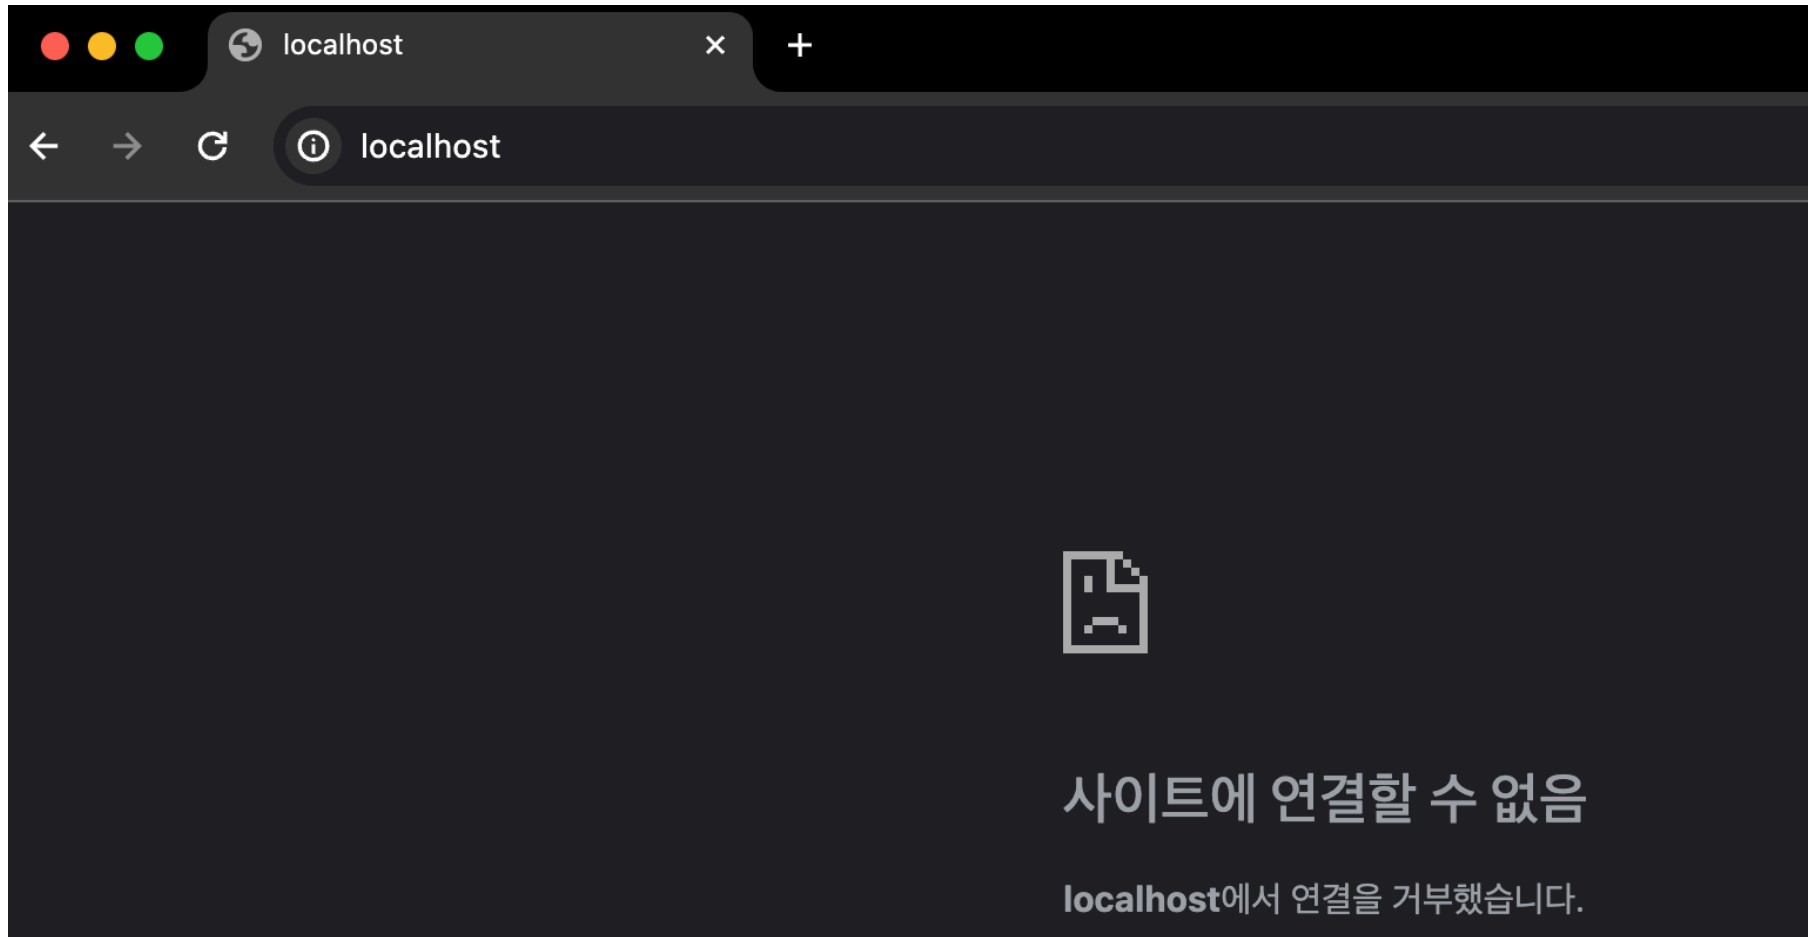

단계11: 중지된 nginx 컨테이너 확인

```
docker ps -a
```

```
good593 🐵 ~/dev/docker
> docker ps -a
CONTAINER ID   IMAGE      COMMAND                  CREATED        STATUS              PORTS                               NAME
S
eb18ec4fea33   nginx     "/docker-entrypoint...." 13 minutes ago Exited (0) 3 minutes ago          web
52bb2eb8d414   ubuntu   "/bin/bash"              3 months ago  Exited (129) 3 months ago         unb
tu_test
fd6f8e571db3   mysql     "docker-entrypoint.s..." 3 months ago  Up 5 hours                  0.0.0.0:3306->3306/tcp, 33060/tcp dock
er-db-1
good593 🐵 ~/dev/docker
> █
```

단계12: 중지된 nginx 컨테이너 삭제

- 명령어: `docker rm <컨테이너이름>`

```
docker rm web
docker ps -a # 삭제 확인
```

```
good593 ~/dev/docker
> docker rm web
web
good593 ~/dev/docker
> docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
52bb2eb8d414	ubuntu	"/bin/bash"	3 months ago	Exited (129) 3 months ago
fd6f8e571db3	mysql	"docker-entrypoint.s..."	3 months ago	Up 5 hours
		0.0.0.0:3306->3306/tcp, 33060/tcp		docker-db-1

```
good593 ~/dev/docker
>
```

단계13: nginx 이미지 삭제

- 명령어: `docker rmi <이미지이름>`

```
docker rmi nginx
```

```
good593 🐵 ~/dev/docker  
▶ docker rmi nginx  
Untagged: nginx:latest  
Untagged: nginx@sha256:4c0fdaa8b6341bfdeca5f18f7837462c80cff90527ee35ef185571e1c327beac  
Deleted: sha256:6c7be49d2a11cfab9a87362ad27d447b45931e43dfa6919a8e1398ec09c1e353  
Deleted: sha256:c396b88c96ca81a14d79ebdb51e47379e5e5d4b5c7a7c074aa9b638f81a71cae  
Deleted: sha256:4bf937c21330a80ec2c3bf9c166590be4643841776326c8f46a2b23ca22e4d34  
Deleted: sha256:79bd22e57f5cf8a249095bcd1eb2832b1d88b9a77149e7ae662cfb1d20d67b2  
Deleted: sha256:65ba1a209b177d23bc193a7ce93549c7cd3d8be6ec2d858273ef289c8f9a8c8d  
Deleted: sha256:f921883979fd41110fc717d8da2bc65a3e5febec0556d690cb8f9b24178bd908  
Deleted: sha256:b649465114eb039494ec1ffbd61f29c9aa09d628dba9b23c6d85bd85cb2925e9  
Deleted: sha256:6f2d01c02c30cc1ffac781aff795cba8eeb29cc27756fe37bf525169856369c6  
good593 🐵 ~/dev/docker
```

단계14: nginx 이미지 삭제 확인

```
docker image ls
```

```
good593 🐵 ~/dev/docker  
▶ docker image ls  
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE  
ubuntu        latest    bf9e5b7213b4   4 months ago  69.2MB  
mysql         latest    54fea0bc79f9   6 months ago  599MB  
good593 🐵 ~/dev/docker  
▶ █
```